



#TOOLTIPS

09.2025

EN

18V/MAX

MULTIBRAND BATTERY SYSTEM

MAXIMUM POWER · MAXIMUM SUSTAINABILITY



AEG*



Bosch*



Dewalt*



Festool*



Flex*



Hikoki*



Makita*



Metabo*



Milwaukee*

3D CROSS LINE LASERS

3D FLOOR

NEW

Renewed and improved



» 3

WATER LEVELS

DIGITAL LEVEL

NEW

A digital magnetic spirit level with an extra strong profile.



» 28



MULTICROSS 3D
18V/MAX

» 8



MULTICROSS 4D
18V/MAX
ELECTRONIC

NEW

» 9

SYMBOLS

	Accuracy
	Levelling
	
	Range with receiver (red lasers)
	
	
	Range with receiver (green lasers)
	
	
	Dust and water resistance
	Number of 90° angles (floor/ceiling)
	Vertical mode
	Tilt protection
	
	
	Scan function
	Wind function
	Fine adjustment of vertical lines
	Tripod thread
	Remote control
	
	Manual slope
	
	
	Electronic slope
	Digital slope
	Battery



*VISIT US
ONLINE FOR*
more product information
product comparisons
product videos
user manuals
...

www.futech-tools.com



FOLLOW US ON 

FOLLOW US ON 


FOLLOW US ON 

FOLLOW US ON 





Also available as a set with a 160 cm tripod and a rotary table.

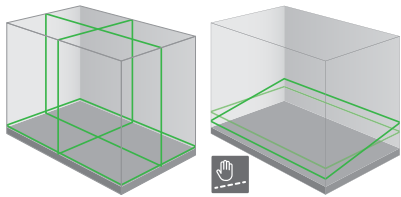





INCLUDED



3D FLOOR **NEW**

FROM Q4/2025



The horizontal laser line only 16 mm above the ground.



MULTICROSS 3D BRAVE

Small device, great performance.

Also available in a set with a 160cm tripod and turntable.

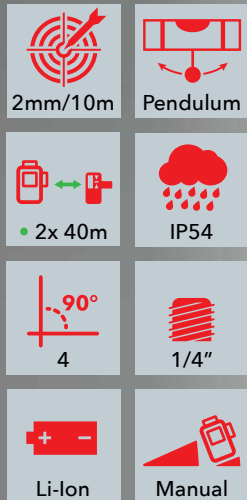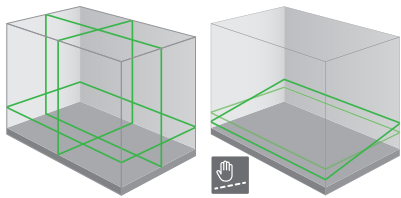

INCLUDED



MULTICROSS 4D ELECTRONIC

The most comprehensive and user-friendly 4D construction laser.




Second horizontal line 20mm above the ground.



Precise motorized levelling with dual slope.



Remote control with display makes all functions very easy to use.

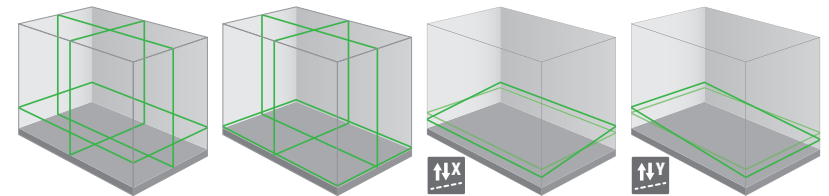

INCLUDED



H034.CAS 180.20 180.40 130.17 130.20 H60028 H60033 H7007

MULTICROSS 3D COMPACT

The family with the strongest laser diodes and all conceivable advantages.



Fine adjustment rotates precisely around the intersection of the vertical lines.

Extra visible laser diodes with an enormous range.

Includes 2 batteries with USB-C connection for charging outside the device.




MULTICROSS 3D COMPACT






MULTICROSS 3D COMPACT

MULTICROSS 4D COMPACT


The most extensive of the family with 4 powerful laser diodes.

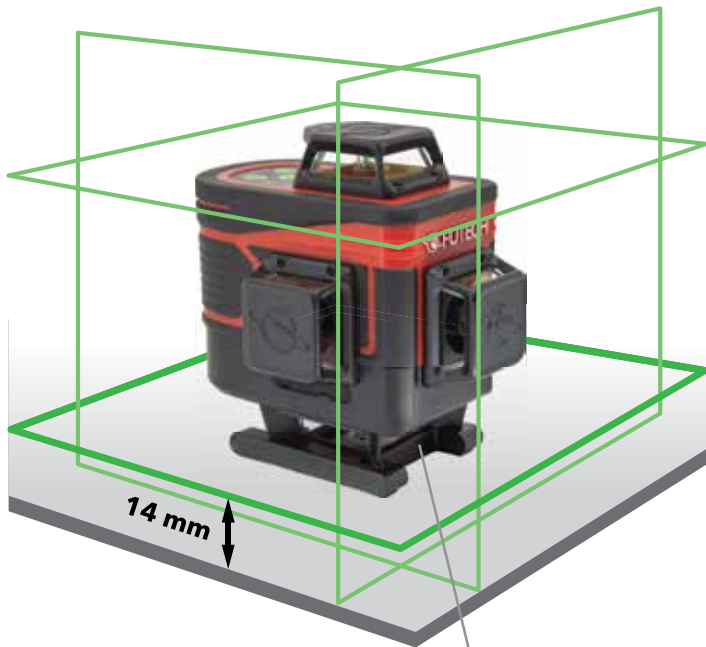

Second horizontal line 14mm above the ground.

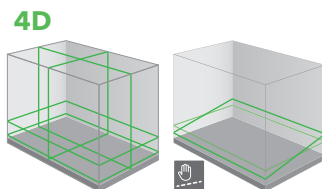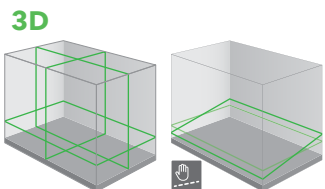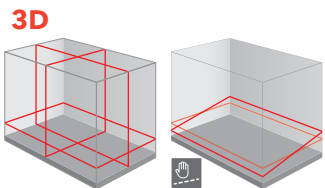

INCLUDED

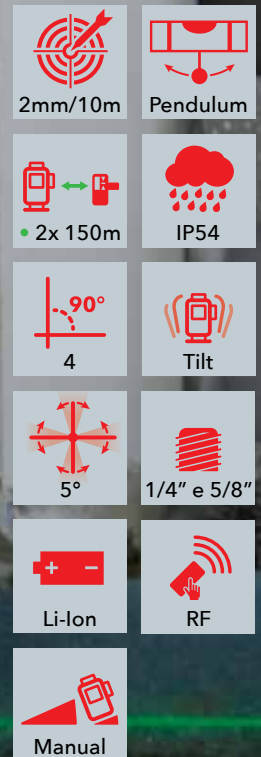


MULTICROSS 4D COMPACT

MULTICROSS 3D

18V/MAX

The first construction laser that works with all your 18V batteries.

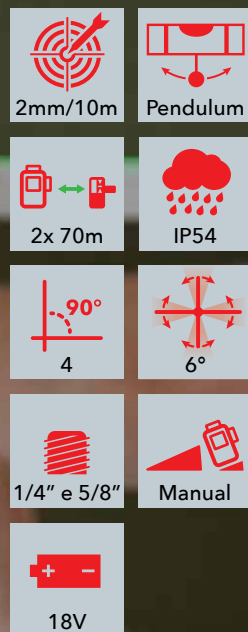

18V/MAX
MULTIBRAND BATTERY SYSTEM
MAXIMUM POWER - MAXIMUM SUSTAINABILITY


Use the batteries of **9 well-known brands** with the brand-specific battery adapters.




Adapter for the 18V battery of 9 tool brands.

USB-C connector for use with mains power.

Fine adjustment rotates around the intersection of the vertical lines.

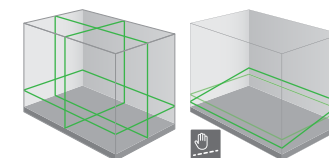

INCLUDED

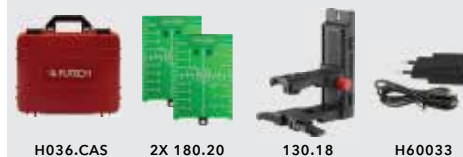

Battery adapters sold separately




Motorized leveling on the X- and Y-axis for extra accuracy.

Second horizontal line 20 mm above the floor.



18V MAX
ELECTRONIC
REMOTE CONTROL

Even faster positioning with the **CONVENIENT REMOTE CONTROL.**

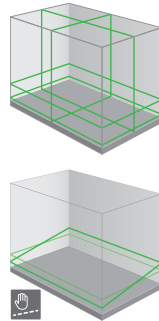

INCLUDED




Battery adapters sold separately

MULTICROSS 4D **NEW**

18V MAX

ELECTRONIC

18V battery power with even higher accuracy, slope function and tilt protection thanks to motorized leveling

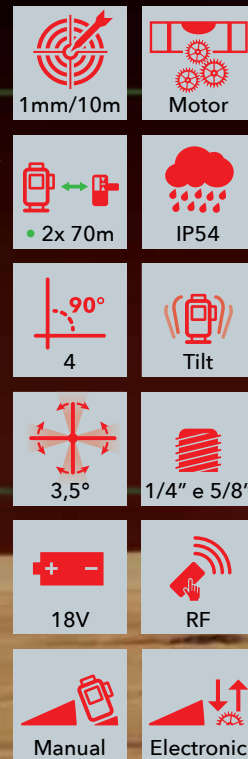

3D/4D LASERS



MULTICROSS 3D
BRAVE



3D
FLOOR

NEW

Q4 2025



MULTICROSS 3D
COMPACT



MULTICROSS 3D
COMPACT



MULTICROSS 4D
COMPACT

Visibility					
Accuracy	2mm / 10m	2mm / 10m	2mm / 10m	2mm / 10m	2mm / 10m
Range (with receiver)	2x 40m	2x 40m	2x 120m	2x 150m	2x 150m
Dust and water resistance	IP54	IP54	IP54	IP54	IP54
Batteries	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion
Mains power connection	USB-C	USB-C	USB-C	USB-C	USB-C
Levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling
Plumb bob	Yes	Yes	Yes	Yes	Yes
Number of laser points /line	0	0	0	0	0
90° angles	4	4	4	4	4
Laser frequency	10 KHz	10 KHz	10 KHz	10 KHz	10 KHz
Tilt protection	No	No	No	No	No
Self-levelling range	±3°	±3°	±4°	±4°	±4°
Manual slope	Yes	Yes	Yes	Yes	Yes
Electronic slope	No	No	No	No	No
Digital slope	No	No	No	No	No
Max. electr. adjustable slope	-	-	-	-	-
Remote control	No	No	Radio frequency	Radio frequency	Radio frequency
Built-in screw for tripod	1/4"	1/4"	1/4" (& 5/8")	1/4" (& 5/8")	1/4" (& 5/8")
Laser class	Class 2 - 515nm - <1mW	Class 2 - 515nm - <1mW	Class 2 - 635nm - <1mW	Class 2 - 520nm - <1mW	Class 2 - 520nm - <1mW
	027.3DG	026.3FG	035.3DR	035.3DG	035.4DG
	€ 249,00	€ 249,00	€ 279,00	€ 379,00	€ 419,00
	027.3DG-S	026.3FG-S			
	SET with tripod 160cm and turning table	SET with tripod 160cm			
	€ 329,00	€ 329,00			



MULTICROSS 4D
ELECTRONIC



1mm / 10m

2x 60m

IP54

Li-ion

USB-C

Motorized levelling

Yes

0

4

10 KHz

Yes

±4°

Yes

Yes

No

± 8,75%

Radio frequency

1/4" (& 5/8")

Class 2 - 515nm - <1mW

034.4DE

€ 589,00



MULTICROSS 3D
18V MAX



2mm / 10m

2x 70m

IP54

18V Li-ion

USB-C

Pendulum levelling

Yes

0

4

10 KHz

No

±4°

Yes

No

No

-

No

1/4" & 5/8"

Class 2 - 505-525nm - <1mW

036.3DG

€ 319,00



MULTICROSS 4D
18V MAX ELECTRONIC



1mm / 10m

2x 70m

IP54

18V Li-ion

USB-C

Motorized levelling

Yes

0

4

10 KHz

Yes

±3,5°

Yes

Yes

No

± 6,10%

Radio frequency

1/4" & 5/8"

Class 2 - 505-525nm - <1mW

036.4DE

€ 499,00

18V MAX

MULTIBRAND BATTERY SYSTEM

MAXIMUM POWER · MAXIMUM SUSTAINABILITY

AVAILABLE FOR SEPARATE
PURCHASE WITH THE
MULTICROSS 3D 18V MAX.



COMPATIBLE WITH
AEG

H036.AEG

€ 9,00



COMPATIBLE WITH
BOSCH

H036.BOS

€ 9,00



COMPATIBLE WITH
DEWALT

H036.DEW

€ 9,00



COMPATIBLE WITH
FESTOOL

H036.FES

€ 9,00



COMPATIBLE MET
FLEX

H036.FLE

€ 9,00



COMPATIBLE WITH
HIKOKI

H036.HIK

€ 9,00



COMPATIBLE WITH
MAKITA

H036.MAK

€ 9,00



COMPATIBLE WITH
METABO

H036.MET

€ 9,00



COMPATIBLE WITH
MILWAUKEE

H036.MIL

€ 9,00

ACCESSORIES

RF REMOTE CONTROL MULTICROSS 4D



Suitable for:
034.4DE

H7007

€ 99,00

RF REMOTE CONTROL **18V MAX** ELECTRONIC



Suitable for:
034.4DG

H036.RCO

€ 79,00

TURNING TABLE FOR MULTICROSS 3D BRAVE



Suitable for:
027.3DG

H027.TUR

€ 29,00

TURNING TABLE FOR 3D FLOOR **NEW**



Suitable for:
026.3FG

H026.TUR

€ 29,00

LI-ION BATTERY



Suitable for:
011.20R, 011.20G,
027.3DG, 026.3FG,
035.3DR, 035.3DG,
035.4DG, 034.4DE

H60028

€ 29,00

CHARGER / ADAPTER



Suitable for:
011.20R, 011.20G,
027.3DG, 026.3FG,
035.3DR, 035.3DG,
035.4DG, 034.4DE

H60033

€ 29,00

BATTERY HOLDER



Suitable for:
H60028

H60027B (power socket)

H60027U (USB-C)

€ 16,50

MINI TRIPOD WITH SHIFTING BASE



Suitable for:
035.3DR, 035.3DG,
035.4DG, 034.4DE

130.10

€ 69,00

JUPITER 2.0

The ideal laser for small jobs

3mm/10m

Pendulum


40 m

IP54

1/4"

Li-Ion

Manual

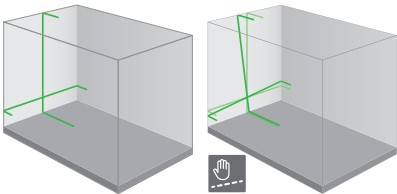

INCLUDED



H009.POU



130.11

SATURN 2.0

The mega visible laser lines and Li-ion battery make this laser very popular among professionals.



2mm/10m

Pendulum

• 50m


• 50m

IP54

1/4"

Li-Ion

Manual

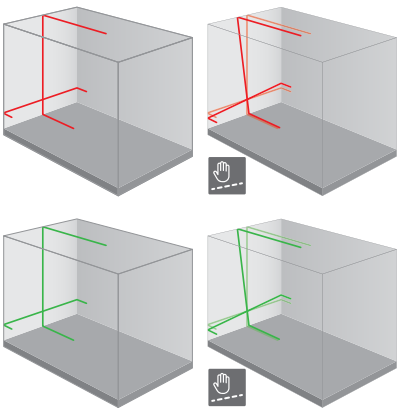

INCLUDED



H011.CAS



• 180.30
• 180.20



130.15





H60028



H60033

4 corners of 90°

Laser point at the center of each line enhances visibility at long distances, even outdoors.



INCLUDED



HCASE



• 180.30
• 180.20



• 180.10
• 180.40



H60024



H30022



H60030



130.07

MULTICROSS 5 SINGLE DOT

Accurately setting out angles is its speciality.

 1,5mm/10m	 Pendulum
 2x 50m	 2x 50m
 IP54	 4
 360°	 5/8"
 Li-Ion	 4x AA



MULTICROSS 8 HIGH PRECISION SINGLE DOT

The most accurate line laser with 8 laser points that you can also see far outdoors (without a receiver).




 1mm/10m	 Motor
 2x 50m	 2x 50m
 IP54	 4
 5/8"	 360°
 Manual	 Electronic
 Li-Ion	

4 corners of 90°

Laser point at the center of each line enhances visibility at long distances, even outdoors.

Fine adjustment makes setting out angles precise and fast, even over long distances.

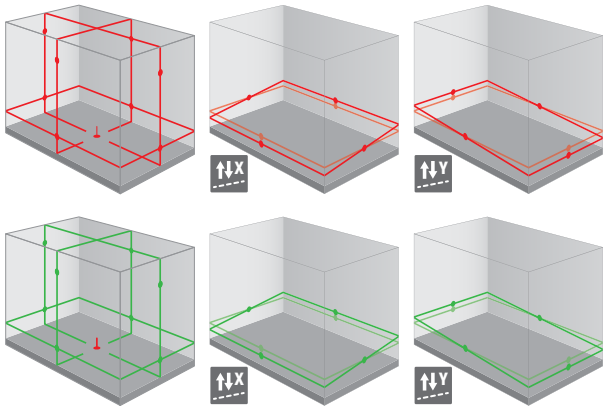

INCLUDED

					
HCASE.Y	• 180.30 • 180.20	• 180.10 • 180.40	H60019	H60023	130.07


IP66 enclosure, resistant to water and dust.

Extremely powerful laser lines.

TILT-security

Remote control with interactive display makes manual, electronic, and digital slope adjustment easy.

Fine adjustment for quick and accurate positioning, even at long distances.

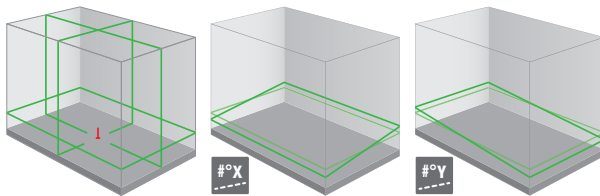

INCLUDED



PROCROSS 8.0 DS

Long distances, slopes in percentage, setting out angles...
Everything you need, with simplicity, both indoors and outdoors.



OVERVIEW (CROSS) LINE LASERS



JUPITER 2.0



SATURN 2.0



SATURN 2.0

MULTICROSS 5
SINGLE DOT

Visibility				
Accuracy	3mm / 10m	2mm / 10m	2mm / 10m	1,5mm / 10m
Range (with receiver)	40m	50m	50m	2x 50m
Dust and water resistance	IP54	IP54	IP54	IP54
Batteries	Li-ion	Li-ion	Li-ion	Li-ion or 4x AA
Mains power connection	USB-C	USB-C	USB-C	DC Connector
Levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling
Plumb bob	No	No	No	Yes
Number of laser points per line	0	0	0	1
Number of 90° angles on floor and ceiling	0	0	0	4
Laser frequency (in receiver mode)	10 KHz	10 KHz	10 KHz	10 KHz
Tilt protection	No	No	No	No
Self-levelling range	±4°	±3,5°	±3,5°	±2°
Manual slope	Yes	Yes	Yes	Yes
Electronic slope	No	No	No	No
Digital slope	No	No	No	No
Maximum electronically adjustable slope (X-axis / Y-axis)	-	-	-	-
Remote control	No	No	No	No
Built-in screw for tripod	1/4"	1/4"	1/4"	5/8"
Laser class	Class 2 - 520nm - <1mW	Class 2 - 520nm - <1mW	Class 2 - 635nm - <1mW	Class 2 - 635nm - <1mW
	009.20G	011.20R	011.20G	033.05R
	€ 89,00	€ 179,00	€ 199,00	€ 249,00



MULTICROSS 5
SINGLE DOT



1,5mm / 10m

2x 50m

IP54

Li-ion or 4x AA

DC Connector

Pendulum levelling

Yes

1

4

10 KHz

No

±2°

Yes

No

No

-

No

5/8"

Class 2 - 510-530nm - <1mW

033.05G

€ 329,00



MULTICROSS 8
HIGH PRECISION
SINGLE DOT



1mm / 10m

2x 50m

IP54

Li-ion

DC Connector

Motorized levelling

Yes

1

4

10 KHz

No

±3,5°

Yes

Yes

No

±10%

No

5/8"

Class 3R - 660 nm - 1 mW-<5 mW

040.08

€ 549,00



MULTICROSS 8
HIGH PRECISION
SINGLE DOT



1mm / 10m

2x 50m

IP54

Li-ion

DC Connector

Motorized levelling

Yes

1

4

10 KHz

No

±3,5°

Yes

Yes

No

±10%

No

5/8"

Class 3R - 520 nm - 1 mW-<5 mW

040.08G

€ 649,00



PROCROSS 8.0 DS



1mm / 10m

2x 200m

IP66

Li-ion

DC Connector

Motorized levelling

Yes

0

4

10 KHz

Yes

±3,5°

Yes

Yes

Yes

±10%

Radio frequency

5/8"

Class 2 - 520nm - <1mW

044.80G

€ 1099,00

ACCESSORIES

LI-ION BATTERY



Suitable for:
033.05R, 033.05G

H60022

€ 29,00

LI-ION BATTERY



Suitable for:
011.20R, 011.20G,
027.3DG, 026.3FG,
035.3DR, 035.3DG,
035.4DG, 034.4DE

H60028

€ 29,00

LI-ION BATTERY



Suitable for:
040.08, 040.08G

H60023

€ 69,00

LI-ION BATTERY



Suitable for:
044.80G

H60031

€ 149,00

PROCROSS 8.0 DS REMOTE CONTROL



Suitable for:
044.80G

H7006

€ 199,00

CHARGER / ADAPTER



Suitable for:
033.05R, 033.05G

H60024
H60030

€ 29,00
€ 3,50

CHARGER / ADAPTER



Suitable for:
011.20R, 011.20G,
027.3DG, 026.3FG,
035.3DR, 035.3DG,
035.4DG, 034.4DE

H60033

€ 29,00

CHARGER / ADAPTER



Suitable for:
040.08, 040.08G

H60019

€ 25,00

CHARGER / ADAPTER



Suitable for:
044.80G

H60032

€ 39,00

BATTERY HOLDER



Suitable for:
H60028

H60027B (power socket)

H60027U (USB-C) **€ 16,50**

PARA ONE

One button on the device for simplicity.
Remote control for all advanced functions.

1mm/10m

Motor

2x 300m

2x 300m

IP66

Z-axis

Tilt

Scan

Wind

5/8"

Manual


Electronic

Li-Ion


IR



The Para One, now also with Z-axis.

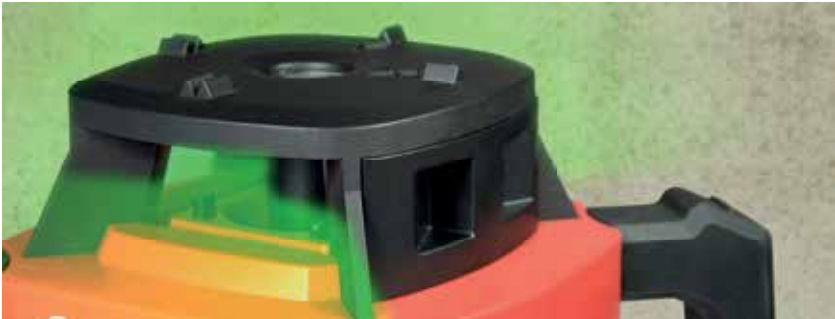

The Anti-reflection clip prevents unwanted reflections.
(included with all Para models.)

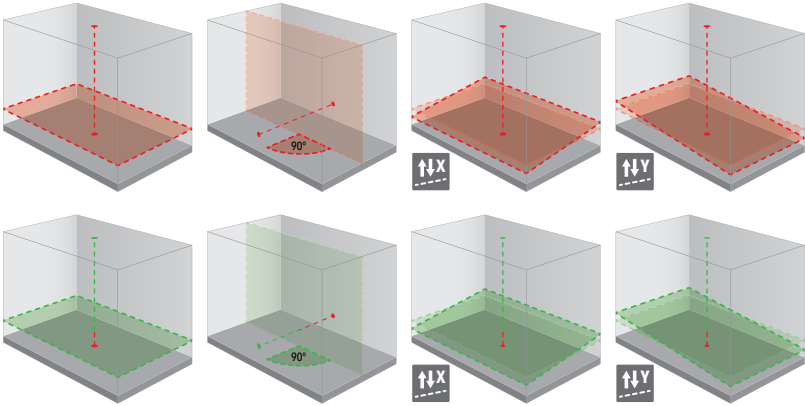

INCLUDED

H052.CAS

• 180.30
• 180.20

• 180.10
• 180.40

• H052.CHR
• H062.CHR


H052.BAT

2X H052.CLI

H7008



Interactive display on both the remote control and the laser makes all functions easy.

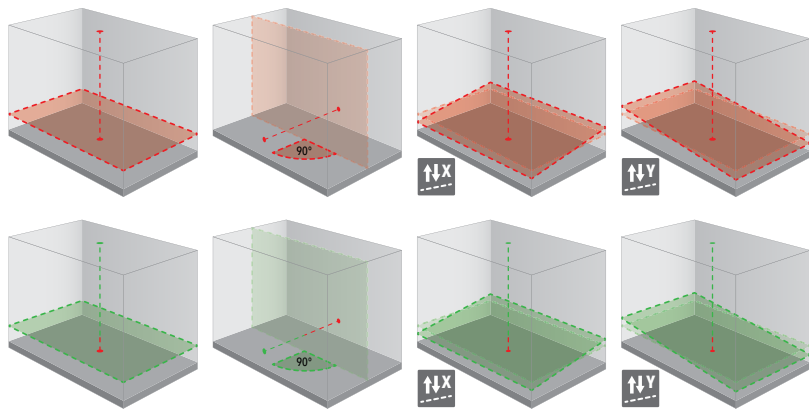

INCLUDED



PARA DS

Setting slopes in percentages is child's play for this comprehensive rotary laser.




1mm/10m	Motor	2x 300m
2x 300m	IP65	Z-axis
Tilt	Scan	Wind
5/8"	Manual	Electronic
Digital	Li-Ion	RF

SPINNER

Powerhouse, mainstay, complete and reinvented.



Delivered in a convenient case, with tripod and measuring rod.

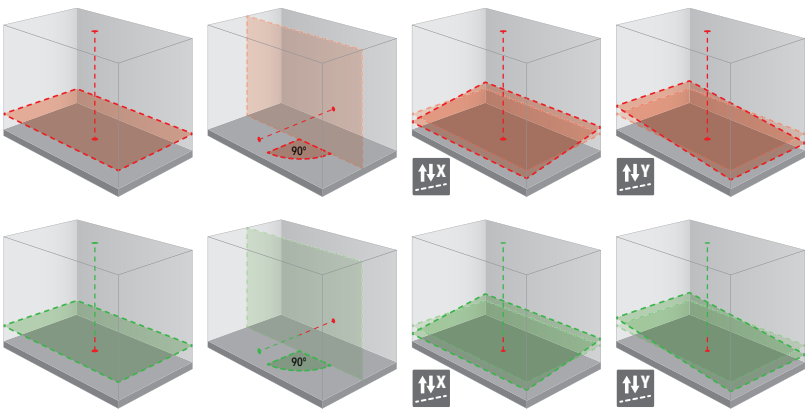

INCLUDED						
						
H062.CAS	• 180.30 • 180.20	• 180.10 • 180.40	H052.CHR	H7002	100.136	140.200



158.36R.MAG - BULL HEAVY WITH MAGNETS

Extra-strong magnets ensure secure attachment and flexibility for use on multiple machines.



158.36R.CLA - BULL HEAVY WITH CLAMPS

The robust clamps ensure your receiver doesn't move a millimeter – even when the excavator arm makes rough movements.



158.36R.DIS - BULL HEAVY CABIN

The cabin display ensures that the position of the laser line can also be read inside the cab, when the receiver on the machine arm is difficult to see.

BULL HEAVY RED **NEW**

Use our red rotating lasers with your excavator for highly precise ground leveling, featuring 360° all-around laser beam detection.



OVERVIEW ROTARY LASERS



SPINNER



SPINNER



PARA ONE



PARA ONE

	SPINNER	SPINNER	PARA ONE	PARA ONE
Visibility				
Accuracy	1,5mm / 10m	1,5mm / 10m	1mm / 10m	1mm / 10m
Range (with receiver)	2x 250m	2x 250m	2x 300m	2x 300m
Dust and waterproofing	IP55	IP55	IP66	IP66
Batteries	Li-ion	Li-ion	Li-ion	Li-ion
AC power connection	USB-C	DC Connector	USB-C	USB-C
Levelling	Motorized levelling	Motorized levelling	Motorized levelling	Motorized levelling
Plumb bob (Z-axis)	Yes	Yes	Yes	Yes
Rotations per minute	0, 120, 300, 600 RPM	0, 120, 300, 600 RPM	0, 120, 300, 600, 800 RPM	0, 120, 300, 600, 800 RPM
Scanning function	0°, 10°, 45°, 90°, 180°	0°, 10°, 45°, 90°, 180°	0°, 10°, 45°, 90°, 180°	0°, 10°, 45°, 90°, 180°
Wind function	No	No	Yes	Yes
Tilt protection	Yes	Yes	Yes	Yes
Self-levelling range	±5°	±5°	±5°	±5°
Manual slope	Yes	Yes	Yes	Yes
Electronic slope	Yes	Yes	Yes	Yes
Digital slope	No	No	No	No
Maximum electronically adjustable slope (X-axis / Y-axis)	±10%	±10%	±10%	±10%
Remote control	Infrared	Infrared	Infrared	Infrared
Built-in screw for tripod	5/8"	5/8"	5/8"	5/8"
Laser class	Class 2 - 635nm - <1mW	Class 2 - 515nm - <1mW	Class 2 - 635nm - <1mW	Class 2 - 515nm - <1mW
	062.03R.1E.CS CASE-SET with Gyro Receiver € 699,00	062.03G.1E.CS CASE-SET with Gyro Receiver € 799,00	052.01R.50 with Para Receiver MM € 769,00	052.01G.50 with Para Receiver MM € 869,00
	062.03R.4M.CS CASE-SET with Quattro MM € 879,00	062.03G.4M.CS CASE-SET with Quattro MM € 979,00	052.01R.4M with Quattro MM € 879,00	052.01G.4M with Quattro MM € 979,00



PARA DS



1mm / 10m

2x 300m

IP65

Li-ion

USB-C

Motorized levelling

Yes

0, 120, 300, 600, 800 RPM

0°, 10°, 45°, 90°, 180°

Yes

Yes

±5°

Yes

Yes

Yes

±10%

Radio frequency

5/8"

Class 2 - 635nm - <1mW

052.05R.50



with Para Receiver MM

€ 1319,00

052.05R.4M



with Quattro MM

€ 1429,00



PARA DS



1mm / 10m

2x 300m

IP65

Li-ion

USB-C

Motorized levelling

Yes

0, 120, 300, 600, 800 RPM

0°, 10°, 45°, 90°, 180°

Yes

Yes

±5°

Yes

Yes

Yes

±10%

Radio frequency

5/8"

Class 2 - 515nm - <1mW

052.05G.50



with Para Receiver MM

€ 1419,00

052.05G.4M



with Quattro MM

€ 1529,00

ACCESSORIES

ANTI REFLECTION CLIP


Suitable for:
052.01R, 052.01G,
052.05R, 052.05G

H052.CLI

€ 9,00

PARA ONE / PARA REMOTE CONTROL


Suitable for:
052.01R, 052.01G

H7008

€ 35,00

CHARGER / ADAPTER (USB-C)


Suitable for:
052.01R, 052.01G,
052.05R, 052.05G,
062.03R

H052.CHR

€ 59,00

PARA DS RF REMOTE CONTROL


Suitable for:
052.05R, 052.05G

H7009

€ 99,00

LADER / ADAPTER (DC CONNECTOR)


Suitable for:
062.03G

H062.CHR

€ 59,00

LI-ION BATTERY


Suitable for:
052.01R, 052.01G,
052.05R, 052.05G

H052.BAT

€ 49,00



NEW

BULL
HEAVY

Accuracy fine

±2mm - ±10mm

Accuracy coarse

52mm - ±23mm

Battery

7.2V NiMh / 2500 mAh

Operating time / Charging time

40h. / 15h.

BUNDLE OFFER COMPLETE YOUR ROTARY LASER WITH A TRIPOD + MEASURING ROD

TRIPOD 165 CM
+ ROD 200 CM


100.165-B

€ 129,00

TRIPOD 330 CM
+ ROD 240 CM


110.330-B

€ 258,00

BULL HEAVY WITH MAGNETS
158.36R.MAG

€ 999,00

BULL HEAVY WITH CLAMPS
158.36R.CLA

€ 999,00

BULL HEAVY DISPLAY
158.36R.DIS

€ 99,00

RECEIVERS



LINE TRACER R/G



GYRO RECEIVER



GYRO RECEIVER



PARA RECEIVER MM



PARA RECEIVER MM

Suitable for					
Accuracy	1 / 3 mm	1 / 2 / 3 mm	1 / 2 / 3 mm	1 / 5 / 10 mm	1 / 5 / 10 mm
Front display	LCD screen	LCD screen	LCD screen	LCD screen + LED	LCD screen + LED
Back display	LCD screen	LCD screen	LCD screen	LCD screen	LCD screen
Distance to laser line (mm)	No	No	No	Yes	Yes
Dust and waterproofing	IP54	IP56	IP56	IP65	IP65
Suitable laser frequency	10 KHz	-	-	-	-
Height of reception field	96 mm	45 mm	45 mm	125 mm	125 mm
Included clamp	H152.CLA	H60009	H60009	H60016	H60016
	152.30.LT	150.10.GS	150.20.GS	152.50R	152.50G
	€ 99,00	€ 119,00	€ 119,00	€ 189,00	€ 189,00

TRIPODS



LIGHT DUTY 160CM



LIGHT DUTY 180CM



LIGHT DUTY 240CM



MEDIUM DUTY 300CM



ALUMINIUM 165CM

Range (min. and max. height)	60 - 160 cm	60 - 180 cm	74 - 240 cm	75 - 300 cm	100 - 165 cm
Thread	1/4"	5/8"	5/8"	5/8"	5/8"
Head	Tilting head	Fixed	Tilting head	Fixed	Fixed
Feet	Rubber	Rubber	Rubber	Rubber, Metal pin	Metal pin
Height adjustment	Fold-out legs + Spindle	Fold-out legs + Spindle	Fold-out legs + Spindle	Fold-out legs + Spindle	Fold-out legs
	092.160	092.180	092.240	090.300	100.165
	€ 39,00	€ 49,00	€ 99,00	€ 139,00	€ 85,00



QUATTRO



1 / 2 / 3 mm

LCD screen + LED

LCD screen

No

IP67

7 - 12 KHz

60 mm

H60013

150.40.A
€ 199,00


QUATTRO MM



0,5 / 1 / 2 / 5 / 10 mm

LCD screen + LED

LCD screen

Yes

IP67

7 - 12 KHz

60 mm

H60013

150.40.M
€ 299,00


MAESTRO



0,5 / 1 / 2 / 5 / 10 mm

LCD screen + LED

LCD screen

Yes

IP67

7 - 12 KHz

90 mm

H60013

150.60.R
€ 349,00

MEASURING RODS


TELESCOPIC
ROD
400 CM

120 - 400 cm

No

Yes

140.400
€ 45,00

TELESCOPIC
ROD
500 CM

120 - 500 cm

No

Yes

140.500
€ 55,00

AUTOLOCK
ROD
240 CM

87 - 240 cm

Yes

Yes

140.240.SK
€ 69,00

AUTOLOCK
ROD
350 CM

191 - 350 cm

Yes

Yes

140.350.SK
€ 89,00

Range (min. and max. height)

Quick clamp for receiver

Bubble level



ALUMINIUM 3D 165CM

100 - 165 cm

5/8"

Ball head

Metal pin

Fold-out legs

100.165.D
€ 89,00


HEAVY DUTY 330CM

128 - 330 cm

5/8"

Fixed

Rubber, Metal pin

Fold-out legs + Spindle

110.330
€ 209,00


HEAVY DUTY 400CM

170 - 400 cm

5/8"

Fixed

Metal pin

Fold-out legs + Spindle

110.400
€ 279,00


SUPPORT POLE 330CM


170 - 400 cm

1/4" & 5/8"

Fixed

Plastic feet

Infinite height adjust. with clamp

120.330
€ 79,00
NEW


SUPPORT POLE 300CM

160 - 300 cm

-

Fixed

Rubber foot

Autolock

160.300
€ 59,00

Easy to use with
your magnetic
wall mount.

ACCESSORIES

TRIPOD ADAPTER
1/4" M - 5/8" F



130.20 € 9,00

TRIPOD ADAPTER
5/8" M - 1/4" F



130.06 € 9,00

SLOPE ADAPTER 5/8"



Suitable for:
EVERY LASER WITH
MANUAL SLOPE

115.11 € 129,00

MINI TRIPOD ADAPTER
5/8" M - 1/4" F



130.16 € 5,00

TRIPOD ADAPTER
1/4" M - 5/8" F



130.01 € 20,00

TRIPOD ADAPTER
5/8" M - 5/8" F



130.07 € 15,00

TARGET STICKER YELLOW



180.50 € 6,00



MAGNETIC TARGET PLATE



• 180.30 € 9,00
• 180.20 € 9,00

LASER GLASSES



• 180.10 € 9,00
• 180.40 € 9,00

WALL MOUNT WITH
CLAMP AND MAGNET 1/4"



130.08 € 45,00

WALL BRACKET WITH
HEIGHT ADJUSTMENT
AND UNFOLDING
SUPPORT 1/4"



130.18 € 45,00

WALLCLAMP WITH
3D HEAD 1/4"



130.09 € 19,00

WALL MOUNT WITH
MICRO ADJUSTMENT,
CLAMP AND MAGNET
1/4"



130.17 € 59,00

WALL BRACKET WITH
HEIGHT ADJUSTMENT
AND H/V CLAMP 1/4"



130.19 € 49,00



RECEIVERS
LINE TRACER R/G
NEW




*Suitable for:
033.05R, 033.05G,
040.08, 040.08G;
044.80G

080.758

€ 89,00

INCLUDED



H052.CAS

• 180.30
• 180.20

SMARTBASE **NEW**

Position the vertical laser beam remotely.

No more endless walking back and forth to bring your laser into position.

Two speeds for extremely precise work.

Quickly move your laser line closer and position it to perfection.

For every cross-line laser with a central plumb point on the device.*

The hollow central screw ensures the plumb point remains visible on the ground.



EAGLE 32



EAGLE 32

Accuracy	1,0 mm / 1000m
Lens aperture	36mm
Magnification	32x
Self-levelling range	±15'
Horizontal circle	360°
Dust and waterproofing	IP54
072.32	
€ 179,00	

DIGITAL LEVEL M NEW

Digital level usable in any direction. Supplied in a convenient carrying case.



DIGITAL LEVEL M

Accuracy	0° and 90°: 0,1° / rest: 0,2°
Length	60 or 120 cm
Dust and waterproofing	IP65
Magnetic	Yes
Available units	° (degrees), mm/m, %, in/ft
Measuring range	4 x 90°
Shock resistant	Yes
Rotating display	Yes
60 cm	855.060 € 149,00
120 cm	855.120 € 199,00

DIGICORNER

Digital angle meter



TORPEDOLINE NEW

Robust level with V-groove for easier use on rounded surfaces.



TORPEDOLINE

Accuracy	0,5 mm/m
Length	25 cm
Dust and waterproofing	IP67
Magnetic	Yes
Number of vials	2, horizontal and vertical
Shock resistant	Yes
V-groove	Yes
UV-resistant vials	Yes
25 cm	845.025 € 31,43

DIGICORNER

Accuracy	0,1°
Length	26 cm
Magnetic	No
Available units	° (degrees)
Angle indication	digital
Number of memory slots	1
Bubble level	Yes
Bubble level color	yellow/green
992D T-Bevel-30 € 69,00	



HIGH ACCURACY
0,5mm/m



EXTRA STRONG PROFILE
2mm thick aluminium



UV-RESISTANT VIALS
Anti-discoloration



SHOCKPROOF
Shock-absorbing end caps



ESD PROTECTED (ANTI-STATIC)
Prevents inaccuracies caused by static charge



MAGNETIC (ONLY SPIRITLINE M)
Strong magnets on the underside



SPIRITLINE




SPIRITLINE M

		825.010	€ 19,00	6,5 cm
820.040	€ 23,50	825.040	€ 32,00	40 cm
820.060	€ 31,50	825.060	€ 39,00	60 cm
820.080	€ 37,00	825.080	€ 48,00	80 cm
820.100	€ 44,00	825.100	€ 58,50	100 cm
820.120	€ 51,50	825.120	€ 68,00	120 cm
820.150	€ 63,50	825.150	€ 80,00	150 cm
820.180	€ 74,00	825.180	€ 94,00	180 cm
820.200	€ 82,50	825.200	€ 106,00	200 cm

SPIRITLINE SPIRITLINE M

NEW

A solid and robust spirit level
that everyone wants to have.
Available in all sizes.

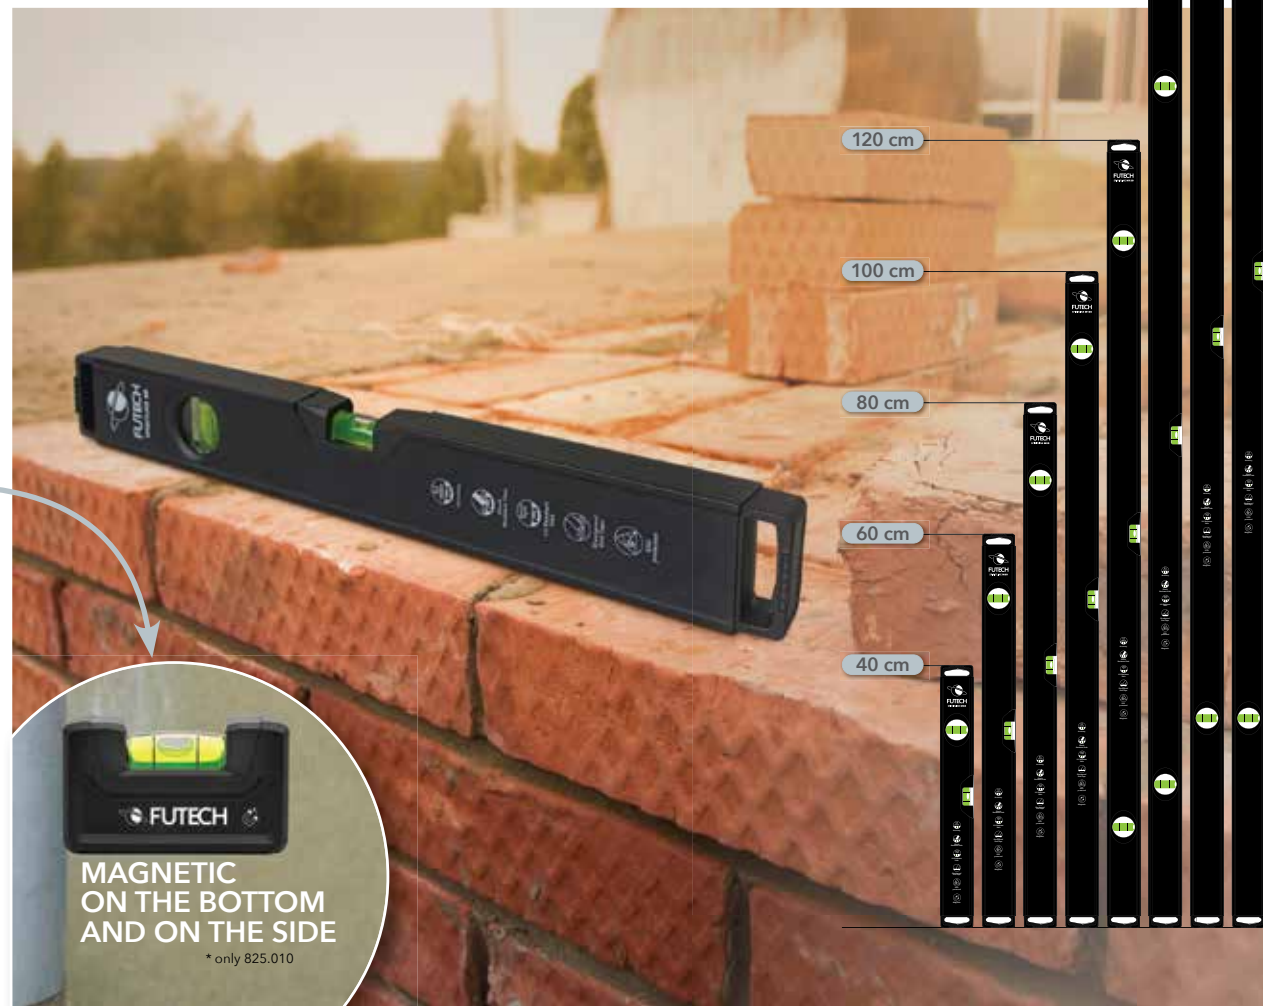

**MAGNETIC
ON THE BOTTOM
AND ON THE SIDE**

* only 825.010

DISTY

Distances, surfaces, angles,...
all no problem for these
laser distance meters

NEW
Q4/2025



DISTY 40R COMPACT



DISTY 40R



DISTY 60G



DISTY 80R

Range	40 m	40 m	60 m	80 m
Number of memory slots	-	99	99	99
Slope indication	Yes	Yes	Yes	Yes
Surface area	Yes	Yes	Yes	Yes
Volume	Yes	Yes	Yes	Yes
Accuracy	2 mm	2 mm	2 mm	2 mm
Measurements add / subtract	No	Yes	Yes	Yes
Continuous measurement (minimum and maximum size)	Yes	Yes	Yes	Yes
Number of Pythagoras functions	2	4	4	4
Simple surface calculation	No	Yes	Yes	Yes
Multiple surface calculation	No	Yes	Yes	Yes
Painter's function	No	Yes	Yes	Yes
Stake-out measurement	No	Yes	Yes	Yes
Azimuth	No	No	No	No
Available units	m - inch - ft	m - inch - ft	m - inch - ft	m - inch - ft
Camera	No	No	No	No
Zoom	-	-	-	-
Battery	2x AAA 1.5V	3x AAA or Li-ion (option)	Li-ion or 3x AAA	Li-ion or 3x AAA
Dust and waterproofing	IP54	IP54	IP54	IP54
	210.40R	202.40R	202.60G	202.80R
	€ 39,00	€ 69,00	€ 119,00	€ 89,00



DISTY 120RC

120 m
100
Yes
Yes
Yes
2 mm
Yes
Yes
5
Yes
Yes
Yes
Yes
No
m - inch - ft
Yes
4x
3x AAA or ni-mh (chargeable)
IP54
250.120RC
€ 299,00

NEW
Q4/2025



DISTY 150GC

150 m
100
Yes
Yes
Yes
2 mm
Yes
Yes
9
Yes
Yes
Yes
Yes
Yes
m - inch - ft
Yes
4x
3.7V Li-ion
IP68
255.150GC
€ 399,00

ROLLER 2



Range	2 m
Width of measuring blade	12 mm
Extra thick measuring blade	No
Nylon coated	No
Locking brake	Yes
Pressure brake	No
501.02	
€ 2,99	

MEASURING WHEEL 2.0

No distance
is too far.



Range	9999,9 m
Accuracy	100 mm
Available units	m
Brake	Yes
270.318A	
€ 119,00	

MULTIPOWER



MULTIPOWER 3.6
COMPACT



MULTIPOWER 4.6

Category	Cat. III - 600V
True RMS	Yes
Voltage DC/AC	max. 600V
Current DC/AC	max. 10A
Range setting	Automatic
Display	Digital, 4000 counts
Flashlight	LED
Resistance	max. 40 MΩ
Capacity	max. 4000µF
Temperature	-
400.36C	
€ 89,00	

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	Yes
Voltage DC/AC	max. 1000V
Current DC/AC	max. 10A
Range setting	Automatic
Display	Digital, 6000 counts
Flashlight	LED
Resistance	max. 60 MΩ
Capacity	max. 6000µF
Temperature	-20°C ~ +760°C
400.46	
€ 189,00	



VOLTTESTER



VOLTTESTER 4.6A

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	No
Voltage DC/AC	max. 1000V
Current DC/AC	-
Range setting	Automatic
Display	LED
Resolution	12, 24, 50, 120, 400, 690, 1000V
Flashlight	LED
Frequency	40Hz up to 400Hz
420.46A	
€ 99,00	



VOLTTESTER 4.6D

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	Yes
Voltage DC/AC	max. 1000V
Current DC/AC	-
Range setting	Automatic
Display	LCD (3 1/2 digit)
Resolution	1V
Flashlight	LED
Frequency	40Hz up to 400Hz
421.46D	
€ 119,00	



AMPCLAMP



AMPCLAMP 200



AMPCLAMP 1000

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	Yes
Voltage	max. 1000V (AC/DC)
Current	200A (AC)
Range setting	Automatic
Display	LCD, 6000 counts
Flashlight	LED
Resistance	max. 60 MΩ
Capacity	max. 4000μF
Diode test	0.35mA typical, Open circuit <3V DC
Continuity check	≤ 50Ω
Input impedance	10MΩ (VDC & VAC)
Temperature	No
Clamp jaw opening	16 mm
430.200	
€ 119,00	

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	Yes
Voltage	max. 1000V (AC/DC)
Current	600A (AC/DC)
Range setting	Automatic
Display	LCD, 6000 counts
Flashlight	LED
Resistance	max. 60 MΩ
Capacity	max. 100mF
Diode test	0.3mA typical, Open circuit 3.2V DC
Continuity check	≤ 50Ω
Input impedance	10MΩ (VDC & VAC)
Temperature	-20°C ~ 100°C
Clamp jaw opening	35 mm
431.000	
€ 129,00	

VOLTPEN 200-12



Category	Cat. IV - 1000V
True RMS	No
Voltage DC/AC	12V-1000V (AC) 200V-1000V (AC)
Current DC/AC	No
Range setting	Manually
Display	No
Flashlight	LED

410.212	
€ 19,50	

SIGNALTESTER RJ-F

Multifunctional cable tester with tone generator and cycle test for network cables and video cables.

Cable types	Coax, Cat 7, 7a, 6, 6a, 5, 5a, 4, 3
Shielded / Unshielded	Yes / Yes
Voice	RJ11 / RJ12 (4/6 wires)
Data	RJ45 (8 wires)
Video	Type-F (COAX)
Test	Pass / Fail / Reversed / Shorted / Crosss Over / Open / Shield / Split
Wiring tester	Included
Distance ID	5 Video / 5 Data
Signal probe	Included
Tone generator	Yes
Maximum length	300m
Maximum resistance	100Ω (DC)
Min. length for split pair	0,5m
Voltage warning	Yes
450.68C	
€ 109,00	



TUBECORDER



TUBECORDER 5.5 HD
DUAL



TUBECORDER 5.8 HD
FLEX

Screen	5"	5"
Screen resolution	1280 x 720	1280 x 720
Camera diameter	5 mm	8 mm
Camera resolution	2MP	2MP
Front camera	Yes	Yes
Front camera focus range	2 cm - 10 cm	2 cm - 10 cm
Viewing angle	78°	78°
Front object illumination	LED	LED
Side camera	Yes	Yes
Side camera focus range	2 cm - 5 cm	2 cm - 5 cm
Side object illumination	LED	LED
Rotatable camera head	No	350°
Length of flexible tube	5 m	5 m
Photo resolution	1920 x 1080	1920 x 1080
Photo format	.jpg	.jpg
Video resolution	1280 x 720	1280 x 720
Video format	.mp4	.mp4
TV-out	No	No
Data output	Micro SD-card	Micro SD-card
SD card included	Yes	Yes
	650.552	651.58F
	€ 299,00	€ 399,00





ACCESSORIES

GOOSENECK 5M X 5.5MM
DUAL



Suitable for:
650.552

690.552

€ 129,00

GOOSENECK 10M X 8MM
TRIPLE



Suitable for:
650.552

690.1083

€ 149,00

GOOSENECK 5M X 5.5MM
SINGLE **NEW**



Suitable for:
651.58F

691.551

€ 119,00

GOOSENECK 5M X 8MM
FLEX



Suitable for:
651.58F

691.582F

€ 169,00

GOOSENECK 10M X 8MM
FLEX



Suitable for:
651.58F

691.1082F

€ 199,00

TEMPPOINTER



TEMPPOINTER 9

Infrared temperature
Dew point temperature
Emissivity
D:S (distance to spot ratio)
Accuracy of infrared
Thermocouple temperature
Accuracy of thermocouple
Spectral response
Display
Display resolution
Response time
Operating temperature
Relative humidity
Laser
Battery

-50°C - 800°C
No
0,10 - 1,00
16:1
-50°C - 20°C: ± 3,5°C 20 - 300°C: ± 1% 300 - 800°C: ± 1,5%
-50°C - 1370°C
"-50°C - 0°C: ± 2°C 0 - 1370°C: ± 1,5°C"
8 ~ 14 µm
LCD
0,1°C < 1000; 1°C > 1000
150 ms
0 ~ 50°C
10% ~ 90%
Class 2, <1mW, 630-670nm
2x 1,5V AAA

300.09

€ 79,00



TEMPPOINTER 9 DEW

-50°C - 800°C
Yes
0,10 - 1,00
20:1
-50°C - 20°C: ± 3°C 20 - 300°C: ± 1°C 300 - 800°C: ± 2%
-
-
8 ~ 14 µm
LCD
0,1°C < 1000; 1°C > 1000
< 100 ms
-30°C - 100°C
0% ~ 100%
Class 2, <1mW, 630-670nm
9wwV

310.09D

€ 109,00

TEMPVIEWER

9200 **NEW**
FROM Q4/2025



Quickly, easily and in real time
detect cold or heat zones.

Infrared temperature
Infrared accuracy
Ambient temperature
IR resolution
SuperIR
Emissivity
Spectral response
Display
Display resolution
Camera resolution
Zoom
Laser pointer
Battery
Operating time
Thermal field of view (FOV)
Spatial resolution (IFOV)
Pixel size
Aperture
Frame rate
Thermal sensitivity (NETD)
Focal length
High/low temp. indication
Storage
Flashlight
Measuring points

TEMPVIEWER 9200

-20° ~ 550°
± 2°C
15°C ~ 25°C
96 x 96 (9216 pixels)
240 x 240 (57600 pixels)
0,1 - 1,0
7.5 to 14 µm
2,4" Color
240 x 320
640 x 480
No
Yes
Li-ion
up to 8h
50° x 50°
8.89 mrad
12 µm
F1.0
25Hz
< 50mK
1,35 mm
Yes
4 GB Intern
Yes
Center, Hot spot, Cold spot

324.009

€ 299,00

TEMPVIEWER 50K
COMPACT

-20° ~ 400°
± 2°C
15°C ~ 25°C
256 x 192 (49152 pixels)
No
0,1 - 1,0
8 to 14µm
3,5" Touchscreen
640 x 480
3264 x 2448 (8MP)
1.0x - 4.0x
No
Li-ion
up to 4h
50° x 37.2°
3.43 mrad
12 µm
F1.1
25Hz
< 40mK
3,5 mm
Yes
16 GB Intern
Yes
Center, Hot spot, Cold spot

335.049

€ 699,00

TEMPVIEWER 50K
PRO

-20° ~ 550°
± 2°C
15°C ~ 25°C
256 x 192 (49152 pixels)
512 x 384 (196608 pixels)
0,1 - 1,0
7.5 to 14 µm
3,5" Touchscreen
640 x 480
3264 x 2448 (8MP)
1.0x - 8.0x stepless
Yes
Li-ion
up to 6h
50° x 37.2°
3,33 mrad
12 µm
F1.0
25Hz
< 40mK
3,6mm
Yes
16 GB Micro SD
Yes
Center, Hot spot, Cold spot, Instelbaar (10 points, 1 line, 5 rectangles, 5 circles)

335.110

€ 1699,00

TEMPVIEWER 50K
COMPACT **NEW**

FROM Q4/2025

Powerful thermography camera in pocket size.

The ultra-slim sensor and detailed display provide highly accurate temperature analysis.

TEMPVIEWER 50K
PRO **NEW**

FROM Q4/2025

Handheld thermography camera for professional inspections of large objects requiring a wider field of view.

Add voice notes (up to 60 seconds) or text notes (max. 200 characters) to your recordings




MULTISCAN



MULTISCAN	
Detection depth for ferrous materials	80 mm
Detection depth for non-ferrous materials	60 mm
Detection depth for live wires	50 mm
Detection depth for wood	20 mm
Graphical indication of detection depth	Yes
196.20	
€ 79,00	

DRILL POINTER

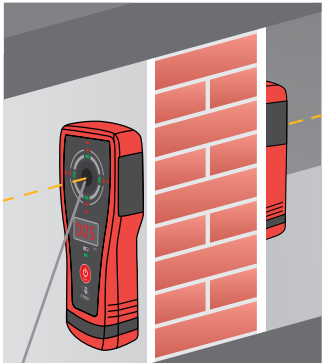

Know where your drill will end, even before you start drilling.



DRILL POINTER	
LED indicators (receiver)	13
LED display (receiver)	Yes
Audible signal (receiver)	Yes
Maximum wall thickness	2-150 cm
Wall thickness measurements	2-200 cm
Depth accuracy	± 5%
Wall thickness accuracy	± 3 mm (no reinforcement) ± 10 mm (with reinforcement)
LED indicators (transmitter)	1
LED display (transmitter)	No
Audible signal (transmitter)	No
571.150	
€ 349,00	

WETPRICKER & HYDRO



WETPRICKER



HYDRO

Measuring depth wood	± 2 mm	20 mm
Measuring depth building materials	± 1 mm	10 mm
Number of wood types	1	8
Number of building material types	1	6
Calibration function	Yes	Yes
Measurement accuracy wood	±2%	±1,5%
Measurement accuracy building materials	±0,1%	0,9 - 1,5%
Maximum moisture	0 - 85% RH	-
Sensor	No	Ultrasonic
Measuring pin	Yes, integrated, replaceable	No
Length of measuring pin	8 mm	-
Measurement range wood	6 - 44%	2 - 65%
Resolution wood	±1%	±0,1%
Measurement range building materials	0,2 - 2,1%	0,1 - 35%
Resolution building materials	±0,05%	±0,1%
	700.08	195.10
	€ 79,00	€ 199,00



your FUTECH dealer



*FIND
THE BEST LASER
FOR YOU!*



www.selectlaser.com



Prices are mentioned **WITHOUT TAXES** (VAT, ...) and valid until 30.04.2026.
Changes in price, shape, execution and potential misprints are reserved. Images used are not strict.
New and/or improved product versions can be launched during the year.

Warranty clauses

FUTECH measuring instruments are made with carefully selected components and manufactured with the utmost care, so that we can offer you products of superior quality. In the unlikely event of your product becoming defective as a result of material or manufacturing faults, you can benefit from a 2 YEAR manufacturer's warranty. During this period, your device will be repaired or replaced free of charge if all of the following conditions are met:

1. Your device was purchased less than 2 years beforehand from an authorised FUTECH distributor. As proof, you attach a copy of the purchase invoice stating the type and serial number of the device to the defective product.
2. You send the defective product to an authorised FUTECH distributor in its original protective packaging (fabric bag, plastic case, etc.).
3. The product does not display damage caused by inappropriate use (e.g. crack(s) due to a fall, internal sand/dirt/water damage, blown or replaced fuses, damage due to use of incorrect charger/adaptor, leaky batteries, attempt to remove or alter the serial number, damage after opening the product, etc.)
4. The product does not show signs of handling or (partial) repair by an unauthorised service centre (e.g. opening of the product, use of non-original parts, etc.).
5. The damage has not been caused by the use of non-original FUTECH accessories.

The manufacturer's warranty does NOT cover periodic maintenance work (e.g. annual fine tuning) or any batteries provided with the unit. The manufacturer's warranty is granted to the first owner of the device as stated on the invoice of the authorised FUTECH distributor. The warranty cannot be transferred to any other party. All repair costs (e.g. transport, parts, labour, etc.) for repairs not covered by the manufacturer's warranty shall be borne in full by the user.