



3D CROSS LINE LASER

3D BRAVE

NEW

Small and precise, with a fresh new look

» 3



3D CROSS LINE LASER

3D FLOOR

» 4

WATER LEVELS

DIGITAL LEVEL M

Perfectly straight, even upside down.

» 32



SMARTBASE

SMARTBASE

Easily position the vertical laser beam from a distance. Compatible with any laser.


» 29



MEASURE WITH PLEASURE

SYMBOLS

	Accuracy
	Levelling
	Range with receiver (red lasers)
	Range with receiver (green lasers)
	Dust and water resistance
	Number of 90° angles (floor/ceiling)
	Vertical mode
	Tilt protection
	Scan function
	Wind function
	Fine adjustment of vertical lines
	Tripod thread
	Remote control
	Manual slope
	Electronic slope
	Digital slope
	Battery

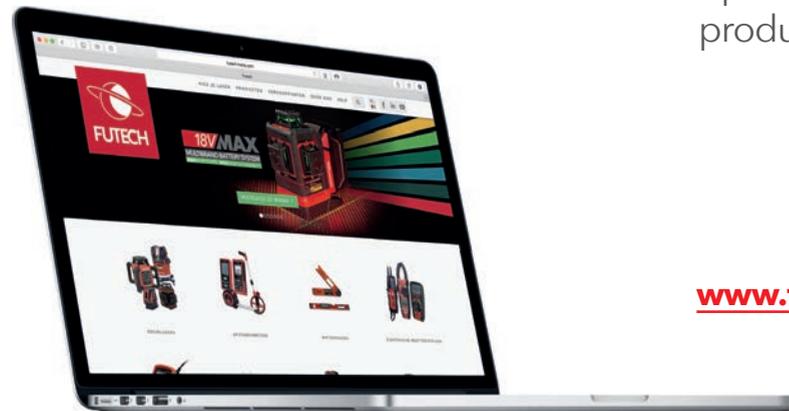

*VISIT US
ONLINE FOR*
more product information
product comparisons
product videos
user manuals
...

www.futech-tools.com



FOLLOW US ON

FOLLOW US ON

FOLLOW US ON

FOLLOW US ON




3D BRAVE **NEW**

Small device, great performance.

Also available in a set with a 160cm tripod and turntable.



Fine adjustment rotates precisely around the intersection of the vertical lines.

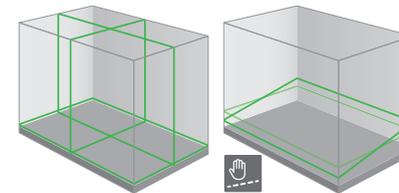

Also available in a set with a 160cm tripod and turntable.

INCLUDED




2mm/10m	Pendulum
• 2x 40m	IP54
4	1/4"
Li-Ion	Manual



3D FLOOR

The horizontal laser line only 16 mm above the ground.

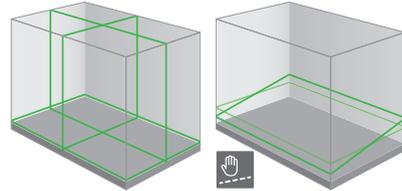

Also available as a set with a 160 cm tripod and a rotary table.

INCLUDED

 (026.3FG) ↑ H026.CAS ↓ H026.SET	 180.20	 180.40	 130.15	 H60033	 H60028	 H026.TUR (ONLY IN SET)	 092.160 (ONLY IN SET)
--	---	---	---	---	---	--	---




 2mm/10m	 Pendulum	 • 2x 40m	 IP54	 4	 1/4"	 Li-Ion	 Manual
--	---	---	---	--	---	---	---


MULTICROSS 4D ELECTRONIC

The most comprehensive and user-friendly 4D construction laser.



-  1mm/10m
-  Motor
-  2x 60m
-  IP54
-  4
-  Tilt
-  5°
-  1/4" e 5/8"
-  RF
-  Manual
-  Electronic
-  Li-Ion


Second horizontal line 20mm above the ground.



Precise motorized levelling with dual slope.



Remote control with display makes all functions very easy to use.

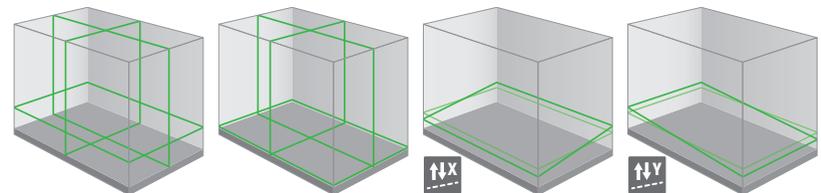

INCLUDED

-  H034.CAS
-  180.20
-  180.40
-  130.17
-  130.20
-  H60028
-  H60033
-  H7007

MULTICROSS 3D COMPACT

The family with the strongest laser diodes and all conceivable advantages.



Fine adjustment rotates precisely around the intersection of the vertical lines.

Extra visible laser diodes with an enormous range.

Includes 2 batteries with USB-C connection for charging outside the device.

2mm/10m	Pendulum
• 2x 150m	IP54
4	Tilt
5°	1/4" e 5/8"
Li-Ion	RF
Manual	



MULTICROSS 3D COMPACT




MULTICROSS 3D COMPACT

2mm/10m	Pendulum
• 2x 120m	IP54
4	Tilt
5°	1/4" e 5/8"
Li-Ion	RF
Manual	


MULTICROSS 4D COMPACT

The most extensive of the family with 4 powerful laser diodes.

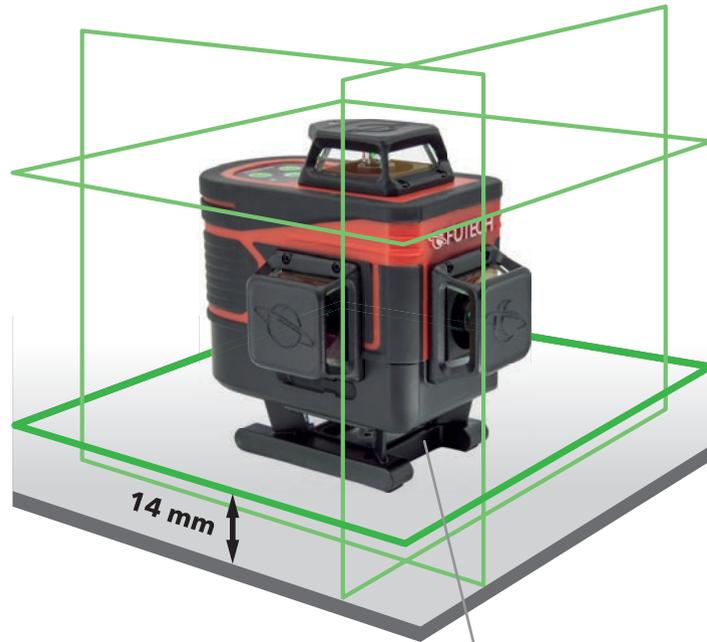


Second horizontal line 14mm above the ground.


3D



3D



4D



INCLUDED



2mm/10m	Pendulum
2x 150m	IP54
90° 4	Tilt
5°	1/4" e 5/8"
Li-Ion	RF
Manual	

MULTICROSS 4D COMPACT

MULTICROSS 3D

18V/MAX

The first construction laser that works with all your 18V batteries.



-  2mm/10m
-  Pendulum
-  2x 70m
-  IP54
-  90°
4
-  6°
-  1/4" e 5/8"
-  Manual
-  18V

18V/MAX

MULTIBRAND BATTERY SYSTEM

MAXIMUM POWER - MAXIMUM SUSTAINABILITY


Use the batteries of **11 well-known brands** with the brand-specific battery adapters.



Adapter for the 18V battery of 11 tool brands.

USB-C connector for use with mains power.

Fine adjustment rotates around the intersection of the vertical lines.



INCLUDED



Battery adapters sold separately



MULTICROSS 4D

18V MAX ELECTRONIC

18V battery power with even higher accuracy, slope function and tilt protection thanks to motorized leveling




18V MAX
ELECTRONIC
REMOTE CONTROL

Even faster positioning with
THE HANDY REMOTE CONTROL.

Motorized leveling on the X- and Y-axis for extra accuracy.

Second horizontal line 20 mm above the floor.

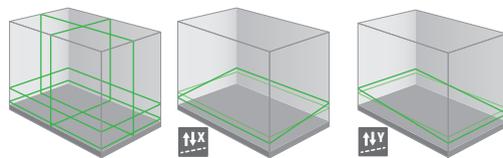

- 1mm/10m
- Motor
- 2x 70m
- IP54
- 4
- Tilt
- 3,5°
- 1/4" e 5/8"
- 18V
- RF
- Manual
- Electronic

INCLUDED



Battery adapters sold separately



3D/4D LASERS



3D BRAVE



3D FLOOR



MULTICROSS 3D COMPACT



MULTICROSS 3D COMPACT



MULTICROSS 4D COMPACT

Visibility					
Accuracy	2mm / 10m	2mm / 10m	2mm / 10m	2mm / 10m	2mm / 10m
Range (with receiver)	2x 40m	2x 40m	2x 120m	2x 150m	2x 150m
Dust and water resistance	IP54	IP54	IP54	IP54	IP54
Batteries	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion
Mains power connection	USB-C	USB-C	USB-C	USB-C	USB-C
Levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling
Plumb bob	Yes	Yes	Yes	Yes	Yes
Number of laser points /line	0	0	0	0	0
90° angles	4	4	4	4	4
Laser frequency	10 KHz	10 KHz	10 KHz	10 KHz	10 KHz
Tilt protection	No	No	No	No	No
Self-levelling range	±3°	±3°	±4°	±4°	±4°
Manual slope	Yes	Yes	Yes	Yes	Yes
Electronic slope	No	No	No	No	No
Digital slope	No	No	No	No	No
Max. electr. adjustable slope	-	-	-	-	-
Remote control	No	No	Radio frequency	Radio frequency	Radio frequency
Built-in screw for tripod	1/4"	1/4"	1/4" (& 5/8")	1/4" (& 5/8")	1/4" (& 5/8")
Laser class	Class 2 - 515nm - <1mW	Class 2 - 515nm - <1mW	Class 2 - 635nm - <1mW	Class 2 - 520nm - <1mW	Class 2 - 520nm - <1mW
	026.3DG	026.3FG	035.3DR	035.3DG	035.4DG
	€ 249,00	€ 249,00	€ 279,00	€ 379,00	€ 419,00
	026.3DG-S	026.3FG-S			
	SET with tripod 160cm and turning table	SET with tripod 160cm			
	€ 329,00	€ 329,00			



MULTICROSS 4D ELECTRONIC



1mm / 10m

2x 60m

IP54

Li-ion

USB-C

Pendulum levelling

Yes

0

4

10 KHz

Yes

±4°

Yes

Yes

No

± 8,75%

Radio frequency

1/4" (& 5/8")

Class 2 - 515nm - <1mW

034.4DE

€ 589,00



MULTICROSS 3D
18V MAX



2mm / 10m

2x 70m

IP54

18V Li-ion

USB-C

Pendulum levelling

Yes

0

4

10 KHz

No

±4°

Yes

No

No

-

No

1/4" & 5/8"

Class 2 - 505-525nm - <1mW

036.3DG

€ 319,00



MULTICROSS 4D
18V MAX ELECTRONIC
+ FREE REMOTE CONTROL



1mm / 10m

2x 70m

IP54

18V Li-ion

USB-C

Pendulum levelling

Yes

0

4

10 KHz

Yes

±3,5°

Yes

Yes

No

± 6,10%

Radio frequency

1/4" & 5/8"

Class 2 - 505-525nm - <1mW

036.4DE

€ 499,00

18V MAX

MULTIBRAND BATTERY SYSTEM
MAXIMUM POWER - MAXIMUM SUSTAINABILITY

AVAILABLE FOR SEPARATE PURCHASE WITH THE 18V MAX LASERS.

COMPATIBLE WITH AEG
H036.AEG € 9,00

COMPATIBLE WITH BOSCH
H036.BOS € 9,00

COMPATIBLE WITH DEWALT
H036.DEW € 9,00

COMPATIBLE WITH EINHELL
H036.EIN € 9,00

COMPATIBLE WITH FESTOOL
H036.FES € 9,00

COMPATIBLE WITH FLEX
H036.FLE € 9,00

COMPATIBLE WITH HIKOKI
H036.HIK € 9,00

COMPATIBLE WITH HILTI
H036.HIL € 9,00

COMPATIBLE WITH MAKITA
H036.MAK € 9,00

COMPATIBLE WITH METABO
H036.MET € 9,00

COMPATIBLE WITH MILWAUKEE
H036.MIL € 9,00

ACCESSORIES

RF REMOTE CONTROL MULTICROSS 4DE



Suitable for: 034.4DE

H7007

€ 99,00

RF REMOTE CONTROL **18V MAX** ELECTRONIC



Suitable for: 036.4DE

H036.RCO

€ 79,00

TURNING TABLE FOR 3D BRAVE AND 3D FLOOR



Suitable for: 026.3DG, 026.3FG

H026.TUR

€ 25,00

LI-ION BATTERY



Suitable for: 011.20R, 011.20G, 026.3DG, 026.3FG, 035.3DR, 035.3DG, 035.4DG, 034.4DE

H60028

€ 29,00

CHARGER / ADAPTER



Suitable for: 011.20R, 011.20G, 026.3DG, 026.3FG, 035.3DR, 035.3DG, 035.4DG, 034.4DE

H60033

€ 29,00

BATTERY HOLDER



Suitable for: H60028

H60027B (power socket)

H60027U (USB-C) **€ 16,50**

MINI TRIPOD WITH SHIFTING BASE



Suitable for: 035.3DR, 035.3DG, 035.4DG, 034.4DE

130.10

€ 69,00


JUPITER 2.0

Ideal for small jobs but with great power.



3mm/10m	Pendulum	40 m	IP54
1/4"	Li-Ion	Manual	

Integrated Li-ion battery

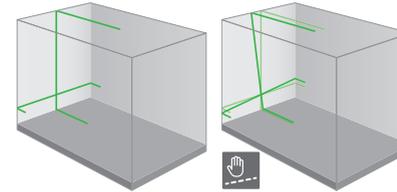

INCLUDED




SATURN 2.0

The mega visible laser lines and Li-ion battery make this laser very popular among professionals.



2mm/10m	Pendulum	50m	50m
IP54	1/4"	Li-Ion	Manual

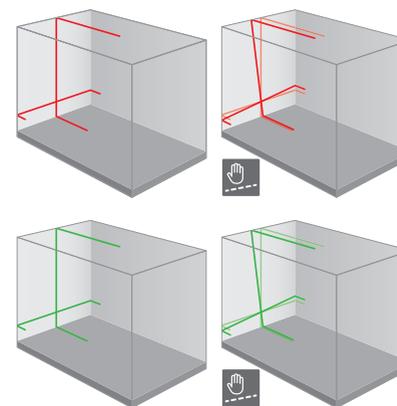

INCLUDED





MULTICROSS 5 SINGLE DOT

Accurately setting out angles is its speciality.

4 corners of 90°

Laser point at the center of each line enhances visibility at long distances, even outdoors.



 1,5mm/10m	 Pendulum
 2x 50m	 2x 50m
 IP54	 4
 360°	 5/8"
 Li-Ion	 4x AA



INCLUDED





MULTICROSS 8 HIGH PRECISION SINGLE DOT

The most accurate line laser with 8 laser points that you can also see far outdoors (without a receiver).



1mm/10m	Motor
2x 50m	2x 50m
IP54	90° 4
5/8"	360°
Manual	Electronic
Li-Ion	

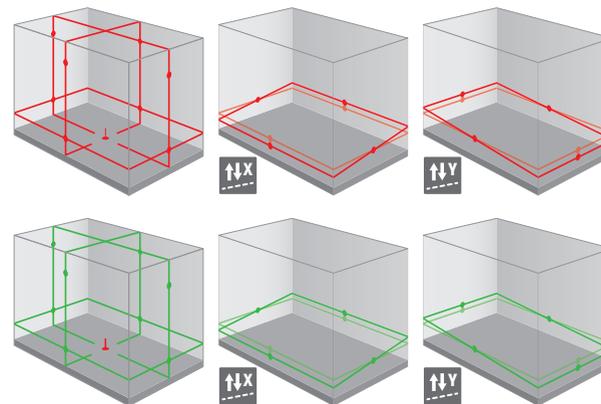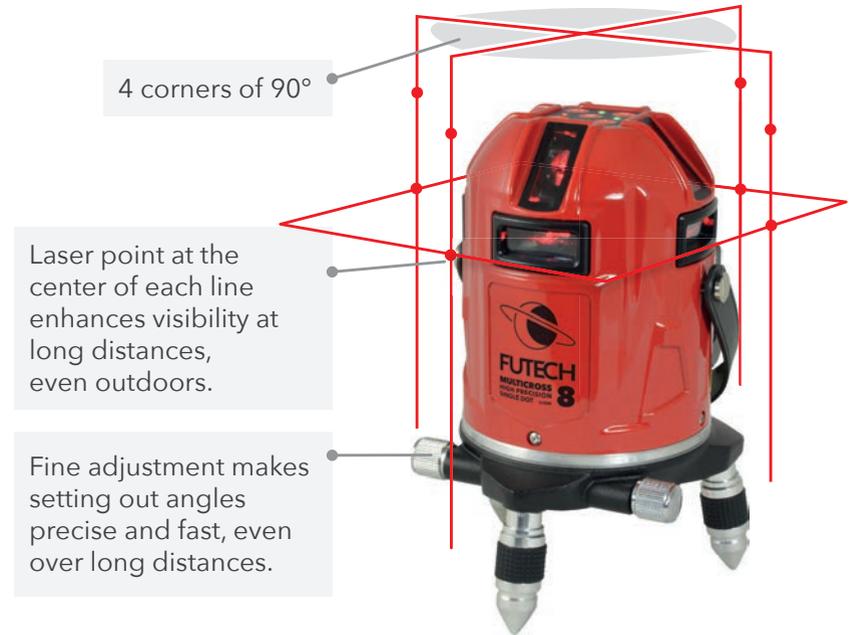

INCLUDED

HCASE.Y	• 180.30 • 180.20	• 180.10 • 180.40	H60019	H60023	130.07

PROCROSS 8.0 DS

Long distances, slopes in percentage, setting out angles...
Everything you need, with simplicity, both indoors and outdoors.


IP66 enclosure, resistant to water and dust.

Extremely powerful laser lines.

TILT-security

Remote control with interactive display makes manual, electronic, and digital slope adjustment easy.

Fine adjustment for quick and accurate positioning, even at long distances.

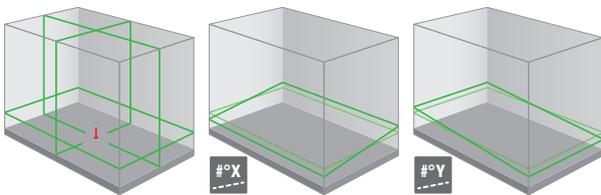

INCLUDED



1mm/10m	Motor
2x 200m	IP66
90° 4	Tilt
360°	5/8"
RF	Manual
Electronic	Digital
Li-Ion	

OVERVIEW (CROSS) LINE LASERS



JUPITER 2.0



SATURN 2.0



SATURN 2.0



MULTICROSS 5
SINGLE DOT

Visibility				
Accuracy	3mm / 10m	2mm / 10m	2mm / 10m	1,5mm / 10m
Range (with receiver)	40m	50m	50m	2x 50m
Dust and water resistance	IP54	IP54	IP54	IP54
Batteries	Li-ion	Li-ion	Li-ion	Li-ion of 4x AA
Mains power connection	USB-C	USB-C	USB-C	DC Connector
Levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling
Plumb bob	No	No	No	Yes
Number of laser points per line	0	0	0	1
Number of 90° angles on floor and ceiling	0	0	0	4
Laser frequency (in receiver mode)	10 KHz	10 KHz	10 KHz	10 KHz
Tilt protection	No	No	No	No
Self-levelling range	±4°	±3,5°	±3,5°	±2°
Manual slope	Yes	Yes	Yes	Yes
Electronic slope	No	No	No	No
Digital slope	No	No	No	No
Maximum electronically adjustable slope (X-axis / Y-axis)	-	-	-	-
Remote control	No	No	No	No
Built-in screw for tripod	1/4"	1/4"	1/4"	5/8"
Laser class	Class 2 - 520nm - <1mW	Class 2 - 520nm - <1mW	Class 2 - 635nm - <1mW	Class 2 - 635nm - <1mW
	009.20G	011.20R	011.20G	033.05R
	€ 89,00	€ 179,00	€ 199,00	€ 299,00



MULTICROSS 5
SINGLE DOT



1,5mm / 10m

2x 50m

IP54

Li-ion of 4x AA

DC Connector

Pendulum levelling

Yes

1

4

10 KHz

No

±2°

Yes

No

No

-

No

5/8"

Class 2 - 510-530nm - <1mW

033.05G

€ 339,00



MULTICROSS 8
HIGH PRECISION
SINGLE DOT



1mm / 10m

2x 50m

IP54

Li-ion

DC Connector

Pendulum levelling

Yes

1

4

10 KHz

No

±3,5°

Yes

Yes

No

±10%

No

5/8"

Class 3R - 660 nm - 1 mW-<5 mW

040.08

€ 549,00



MULTICROSS 8
HIGH PRECISION
SINGLE DOT



1mm / 10m

2x 50m

IP54

Li-ion

DC Connector

Pendulum levelling

Yes

1

4

10 KHz

No

±3,5°

Yes

Yes

No

±10%

No

5/8"

Class 3R - 520 nm - 1 mW-<5 mW

040.08G

€ 649,00



PROCROSS 8.0 DS



1mm / 10m

2x 200m

IP66

Li-ion

DC Connector

Pendulum levelling

Yes

0

4

10 KHz

Yes

±3,5°

Yes

Yes

Yes

±10%

Radio frequency

5/8"

Class 2 - 520nm - <1mW

044.80G

€ 1099,00

ACCESSORIES

LI-ION BATTERY



Suitable for:
033.05R, 033.05G

H60022

€ 29,00

LI-ION BATTERY



Suitable for:
011.20R, 011.20G,
026.3DG, 026.3FG,
035.3DR, 035.3DG,
035.4DG, 034.4DE

H60028

€ 29,00

LI-ION BATTERY



Suitable for:
040.08, 040.08G

H60023

€ 69,00

LI-ION BATTERY



Suitable for:
044.80G

H60031

€ 149,00

PROCROSS 8.0 DS REMOTE CONTROL



Suitable for:
044.80G

H7006

€ 199,00

CHARGER / ADAPTER



Suitable for:
033.05R, 033.05G

H60024
H60030

€ 29,00
€ 3,50

CHARGER / ADAPTER



Suitable for:
011.20R, 011.20G,
026.3DG, 026.3FG,
035.3DR, 035.3DG,
035.4DG, 034.4DE

H60033

€ 29,00

CHARGER / ADAPTER



Suitable for:
040.08, 040.08G

H60019

€ 25,00

CHARGER / ADAPTER



Suitable for:
044.80G

H60032

€ 39,00

BATTERY HOLDER



Suitable for:
H60028

H60027B (power socket)

H60027U (USB-C) € 16,50

PARA ONE

One button on the device for simplicity.
Remote control for all advanced functions.


1mm/10m	Motor
2x 300m	2x 300m
IP66	Z-axis
Tilt	Scan
Wind	5/8"
Manual	Electronic
Li-Ion	IR



The Para One, now also with Z-axis.



The Anti-reflection clip prevents unwanted reflections.
(included with all Para models.)

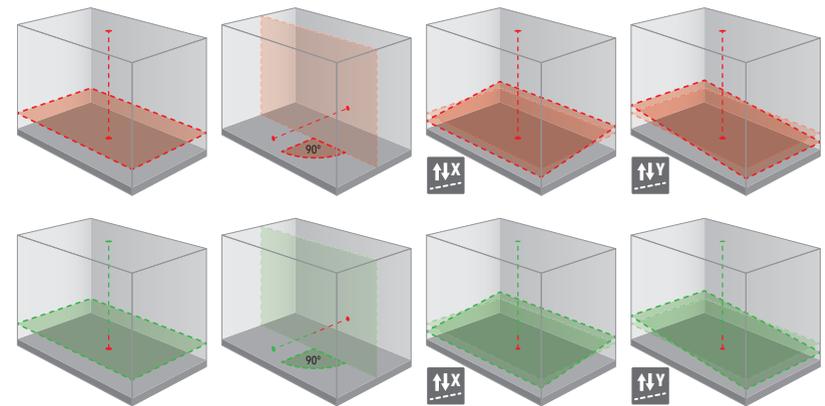

INCLUDED


H052.CAS	• 180.30 • 180.20	• 180.10 • 180.40	• H052.CHR • H062.CHR	H052.BAT	2X H052.CLI	H7008




PARA DS

Setting slopes in percentages is child's play for this comprehensive rotary laser.

Interactive display on both the remote control and the laser makes all functions easy.

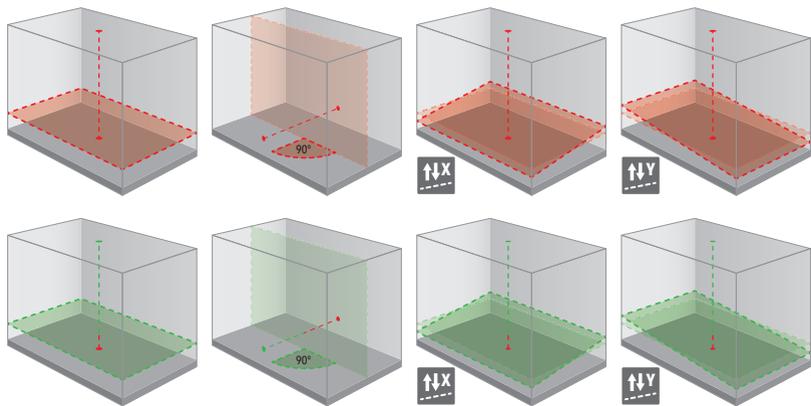

INCLUDED

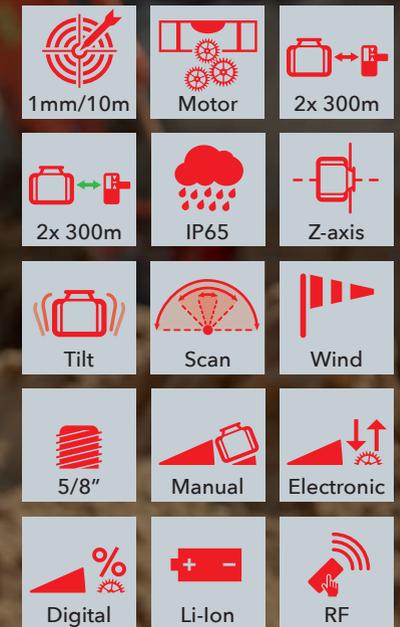

SPINNER


Powerhouse, mainstay, complete and reinvented.



Delivered in a convenient case, with tripod and measuring rod.



-  1,5mm/10 m
-  Motor
-  2x 250 m
-  2x 250 m
-  IP55
-  Z-axis
-  Tilt
-  Scan
-  5/8"
-  Manual
-  Electronic
-  Li-Ion
-  IR

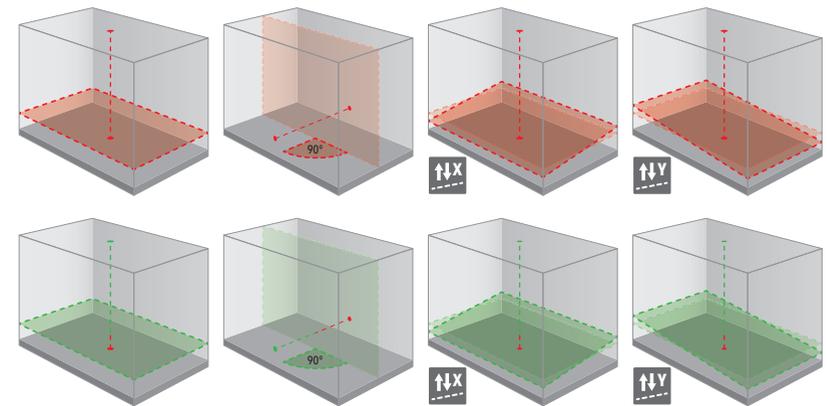

INCLUDED



BULL HEAVY ROOD

Use our red rotating lasers with your excavator for highly precise ground leveling, featuring 360° all-around laser beam detection.



BULL HEAVY WITH MAGNETS

Extra-strong magnets ensure secure attachment and flexibility for use on multiple machines.

158.36R.MAG

BULL HEAVY WITH MAGNETS

€ 999,00



BULL HEAVY WITH CLAMPS

The robust clamps ensure your receiver doesn't move a millimeter – even when the excavator arm makes rough movements.

158.36R.CLA

BULL HEAVY WITH CLAMPS

€ 999,00



BULL HEAVY CABINE DISPLAY

The cabin display ensures that the position of the laser line can also be read inside the cab, when the receiver on the machine arm is difficult to see.

158.36R.DIS

BULL HEAVY CABINE DISPLAY

€ 99,00

BULL HEAVY

Accuracy fine	±2mm - ±10mm
Accuracy coarse	52mm - ±23mm
Battery	7.2V NiMH / 2500 mAh
Operating time/ Charging time	40u / 15u



OVERVIEW ROTARY LASERS



SPINNER



SPINNER



PARA ONE



PARA ONE

Visibility				
Accuracy	1,5mm / 10m	1,5mm / 10m	1mm / 10m	1mm / 10m
Range (with receiver)	2x 250m	2x 250m	2x 300m	2x 300m
Dust and waterproofing	IP55	IP55	IP66	IP66
Batteries	Li-ion	Li-ion	Li-ion	Li-ion
AC power connection	USB-C	DC Connector	USB-C	USB-C
Levelling	Motorized levelling	Motorized levelling	Motorized levelling	Motorized levelling
Plumb bob (Z-axis)	Yes	Yes	Yes	Yes
Rotations per minute	0, 120, 300, 600 RPM	0, 120, 300, 600 RPM	0, 120, 300, 600, 800 RPM	0, 120, 300, 600, 800 RPM
Scanning function	0°, 10°, 45°, 90°, 180°	0°, 10°, 45°, 90°, 180°	0°, 10°, 45°, 90°, 180°	0°, 10°, 45°, 90°, 180°
Wind function	No	No	Yes	Yes
Tilt protection	Yes	Yes	Yes	Yes
Self-levelling range	±5°	±5°	±5°	±5°
Manual slope	Yes	Yes	Yes	Yes
Electronic slope	Yes	Yes	Yes	Yes
Digital slope	No	No	No	No
Maximum electronically adjustable slope (X-axis / Y-axis)	±10%	±10%	±10%	±10%
Remote control	Infrared	Infrared	Infrared	Infrared
Built-in screw for tripod	5/8"	5/8"	5/8"	5/8"
Laser class	Class 2 - 635nm - <1mW	Class 2 - 515nm - <1mW	Class 2 - 635nm - <1mW	Class 2 - 515nm - <1mW
	062.03R.1E.CS  CASE-SET with Gyro Receiver € 699,00	062.03G.1E.CS  CASE-SET with Gyro Receiver € 799,00	052.01R.50  with Para Receiver MM € 769,00	052.01G.50  with Para Receiver MM € 869,00
	062.03R.4M.CS  CASE-SET with Quattro MM € 879,00	062.03G.4M.CS  CASE-SET with Quattro MM € 979,00	052.01R.4M  with Quattro MM € 879,00	052.01G.4M  with Quattro MM € 979,00



PARA DS



PARA DS

ACCESSORIES

ANTI REFLECTION CLIP



Suitable for:
052.01R, 052.01G,
052.05R, 052.05G

H052.CLI € 9,00

CHARGER / ADAPTER (USB-C)



Suitable for:
052.01R, 052.01G,
052.05R, 052.05G,
062.03R

H052.CHR € 59,00

PARA ONE / PARA REMOTE CONTROL



Suitable for:
052.01R, 052.01G

H7008 € 35,00

PARA DS REMOTE CONTROL



Suitable for:
052.05R, 052.05G

H7009 € 99,00

CHARGER / ADAPTER (DC CONNECTOR)



Suitable for:
062.03G

H062.CHR € 59,00

LI-ION BATTERY



Suitable for:
052.01R, 052.01G,
052.05R, 052.05G

H052.BAT € 49,00



1mm / 10m

2x 300m

IP65

Li-ion

USB-C

Motorized levelling

Yes

0, 120, 300, 600, 800 RPM

0°, 10°, 45°, 90°, 180°

Yes

Yes

±5°

Yes

Yes

Yes

±10%

Radio frequency

5/8"

Class 2 - 635nm - <1mW

052.05R.50



with Para Receiver MM

€ 1319,00

052.05R.4M



with Quattro MM

€ 1429,00



1mm / 10m

2x 300m

IP65

Li-ion

USB-C

Motorized levelling

Yes

0, 120, 300, 600, 800 RPM

0°, 10°, 45°, 90°, 180°

Yes

Yes

±5°

Yes

Yes

Yes

±10%

Radio frequency

5/8"

Class 2 - 515nm - <1mW

052.05G.50



with Para Receiver MM

€ 1419,00

052.05G.4M



with Quattro MM

€ 1529,00



RECEIVERS



LINE TRACER R/G



GYRO RECEIVER



GYRO RECEIVER



PARA RECEIVER MM



PARA RECEIVER MM

Suitable for					
Accuracy	1 / 3 mm	1 / 2 / 3 mm	1 / 2 / 3 mm	1 / 5 / 10 mm	1 / 5 / 10 mm
Front display	LCD screen	LCD screen	LCD screen	LCD screen + LED	LCD screen + LED
Back display	LCD screen				
Distance to laser line (mm)	No	No	No	Yes	Yes
Dust and waterproofing	IP54	IP56	IP56	IP65	IP65
Suitable laser frequency	10 KHz	-	-	-	-
Height of reception field	96 mm	45 mm	45 mm	125 mm	125 mm
Included clamp	H152.CLA	H60009	H60009	H60016	H60016
	152.30.LT	150.10.GS	150.20.GS	152.50R	152.50G
	€ 99,00	€ 119,00	€ 119,00	€ 189,00	€ 189,00

MEASURING RODS



TELESCOPIC ROD
400 CM

120 - 400 cm

No

Yes

140.400

€ 45,00



TELESCOPIC ROD
500 CM


120 - 500 cm

No

Yes

140.500

€ 55,00



Range (min. and max. height)

Quick clamp for receiver

Bubble level



QUATTRO

QUATTRO MM

MAESTRO

1 / 2 / 3 mm
LCD screen + LED
LCD screen
No
IP67
7 - 12 KHz
60 mm
H60013
150.40.A
€ 199,00


0,5 / 1 / 2 / 5 / 10 mm
LCD screen + LED
LCD screen
Yes
IP67
7 - 12 KHz
60 mm
H60013
150.40.M
€ 299,00

0,5 / 1 / 2 / 5 / 10 mm
LCD screen + LED
LCD screen
Yes
IP67
7 - 12 KHz
90 mm
H60013
150.60.R
€ 349,00



AUTOLOCK ROD
240 CM

87 - 240 cm
Yes
Yes
140.240.SK
€ 79,00

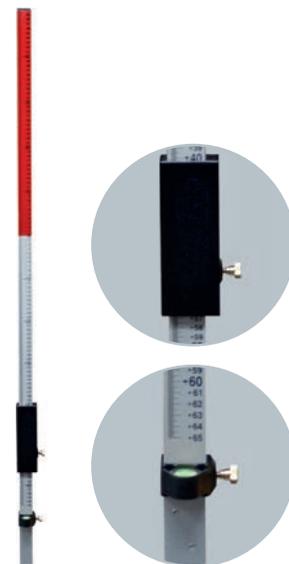

AUTOLOCK ROD WITH
SCREW 240 CM

87 - 240 cm
Yes
Yes
140.240.BD
€ 79,00



AUTOLOCK ROD
350 CM

191 - 350 cm
Yes
Yes
140.350.SK
€ 99,00

TRIPODS



LIGHT DUTY 160CM

Range (min. and max. height)
Thread
Head
Feet
Height adjustment

60 - 160 cm
1/4"
Tilting head
Rubber
Fold-out legs + Spindle
092.160
€ 39,00



LIGHT DUTY 180CM

60 - 180 cm
5/8"
Fixed
Rubber
Fold-out legs + Spindle
092.180
€ 49,00



LIGHT DUTY 240CM

74 - 240 cm
5/8"
Tilting head
Rubber
Fold-out legs + Spindle
092.240
€ 99,00



MEDIUM DUTY 300CM

75 - 300 cm
5/8"
Fixed
Rubber, Metal pin
Fold-out legs + Spindle
090.300
€ 139,00



ALUMINIUM 165CM

100 - 165 cm
5/8"
Fixed
Metal pin
Fold-out legs
100.165
€ 89,00



ALUMINIUM 3D 165CM

Range (min. and max. height)
Thread
Head
Feet
Height adjustment

100 - 165 cm
5/8"
Dome head
Metal pin
Fold-out legs
100.165.D
€ 89,00



ALUMINIUM 170CM

107 - 170 cm
5/8"
Fixed
Metal pin
Fold-out legs
100.170
€ 99,00



HEAVY DUTY 330CM

128 - 330 cm
5/8"
Fixed
Rubber, Metal pin
Fold-out legs + Spindle
110.330
€ 209,00



HEAVY DUTY 400CM

170 - 400 cm
5/8"
Fixed
Metal pin
Fold-out legs + Spindle
110.400
€ 279,00



SUPPORT POLES



Easy height adjustment with platform



SUPPORT POLE 330CM




Easy to use with your magnetic wall mount.



SUPPORT POLE 300CM

Range (min. and max. height)	170 - 400 cm
Thread	1/4" & 5/8"
Head	Fixed
Feet	Plastic foot
Height adjustment	Infinite height adjust. with clamp
	120.330
	€ 79,00

Range (min. and max. height)	160 - 300 cm
Thread	-
Head	Fixed
Feet	Rubber foot
Height adjustment	Autolock
	160.300
	€ 59,00



ACCESSORIES

WALL MOUNT BASE FOR TUBES AND POLES



Suitable for: 160.300

H160.SUP

€ 15,00

BUNDLE OFFER

COMPLETE YOUR ROTARY LASER WITH A TRIPOD + MEASURING ROD

TRIPOD 165 CM + ROD 200 CM



100.165-B

€ 148,00

TRIPOD 330 CM + ROD 240 CM



110.330-B

€ 288,00

ACCESSORIES

TRIPOD ADAPTER
1/4" M - 5/8" F



130.20 € 9,00

TRIPOD ADAPTER
5/8" M - 1/4" F



130.06 € 9,00

TRIPOD ADAPTER
5/8" M - 5/8" F



130.07 € 15,00

MINI TRIPOD ADAPTER
5/8" M - 1/4" F




130.16 € 5,00

TRIPOD ADAPTER
1/4" M - 5/8" F



130.01 € 20,00

TARGET STICKER YELLOW



180.50 € 6,00

WALL MOUNT WITH
CLAMP AND MAGNET 1/4"



130.08 € 45,00

WALL BRACKET WITH
HEIGHT ADJUSTMENT AND
UNFOLDING SUPPORT 1/4"



130.19 € 49,00

MAGNETIC TARGET PLATE



• 180.30 € 9,00
• 180.20 € 9,00

WALLCLAMP WITH
3D HEAD 1/4"



130.09 € 19,00

WALL MOUNT WITH
MICRO ADJUSTMENT,
CLAMP AND MAGNET
1/4"



130.17 € 59,00

LASER GLASSES



• 180.10 € 9,00
• 180.40 € 9,00



SLOPE ADAPTER 5/8"



Suitable for:
EVERY LASER WITH
MANUAL SLOPE

115.11 € 139,00

18V MAX MAGNETIC WALL MOUNT

18V BATTERY POWER
FOR ANY LASER

COMPATIBLE WITH
11 BATTERY BRANDS



FLEXIBLE MOUNTING
The wall mount can be used
ON FLAT OR CURVED SURFACES



STURDY CLAMP MOUNTING
Attach the wall mount
TO HORIZONTAL AND VERTICAL PROFILES (up to 14 cm thick)



130.21 € 85,00



* Suitable for:
033.05R, 033.05G, 040.08,
040.08G; 044.80G

080.758

€ 89,00

INCLUDED



SMART BASE

Position the vertical laser beam remotely.

No more endless walking back and forth to bring your laser into position.


Two speeds for extremely precise work.

Quickly move your laser line closer and position it to perfection.

For each cross line laser, centered on the device.*

The hollow central screw ensures the plumb point remains visible on the ground.

Also suitable for other brands.

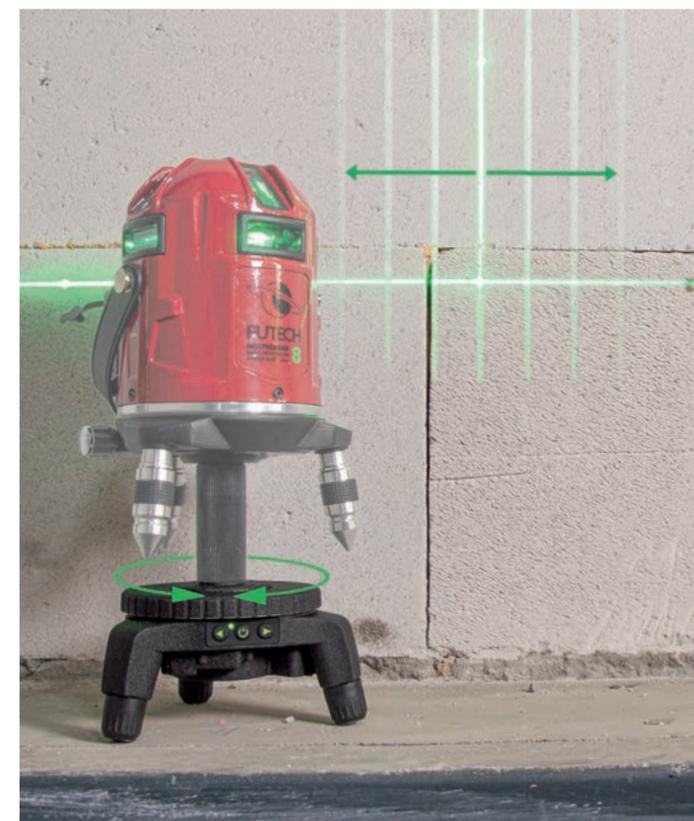


SPIRITLINE SPIRITLINE M

A solid and robust spirit level that everyone wants to have.
Available in all sizes.



HIGH ACCURACY
0,5mm/m



EXTRA STRONG PROFILE
2mm thick aluminium



UV-RESISTANT VIALS
Anti-discoloration



SHOCKPROOF
Shock-absorbing end caps



ESD PROTECTED (ANTI-STATIC)
Prevents inaccuracies caused by static charge



MAGNETIC (ONLY SPIRITLINE M)
Strong magnets on the underside




SPIRITLINE



SPIRITLINE M 

40 cm	820.040	€ 23,50	825.040	€ 32,00
60 cm	820.060	€ 31,50	825.060	€ 39,00
80 cm	820.080	€ 37,00	825.080	€ 48,00
100 cm	820.100	€ 44,00	825.100	€ 58,50
120 cm	820.120	€ 51,50	825.120	€ 68,00
150 cm	820.150	€ 63,50	825.150	€ 80,00
180 cm	820.180	€ 74,00	825.180	€ 94,00
200 cm	820.200	€ 82,50	825.200	€ 106,00

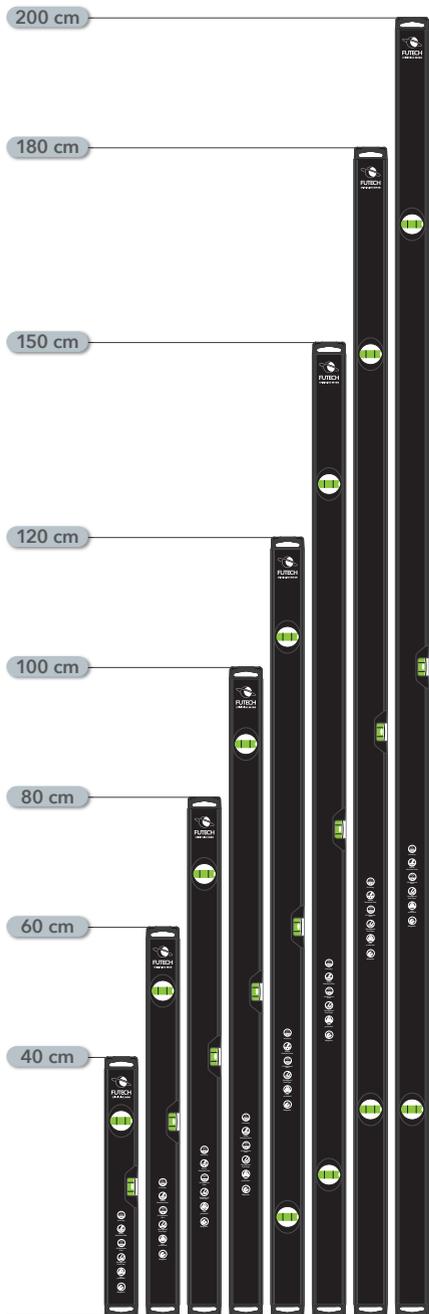

With a magnetic V-groove for accurate measurements on scaffolding and steel pipes, even in tight spaces.

TORPEDOLINE

Robust level with V-groove for easier use on rounded surfaces.



TORPEDOLINE

Accuracy	0,5 mm/m
Length	25 cm
Dust and waterproofing	IP67
Magnetic	Yes
Number of vials	2, horizontal and vertical
Shock resistant	Yes
V-groove	Yes
UV-resistant vials	Yes
845.025	€ 31,43



SPIRITLINE M10

Magnetic on the bottom and on the side.




SPIRITLINE M10

Length	6,5 cm
Magnetic	Yes, bottom and on the side
Number of vials	1
825.010	€ 19,00



DIGITAL LEVEL M

Digital level usable in any direction.
Supplied in a convenient carrying case.

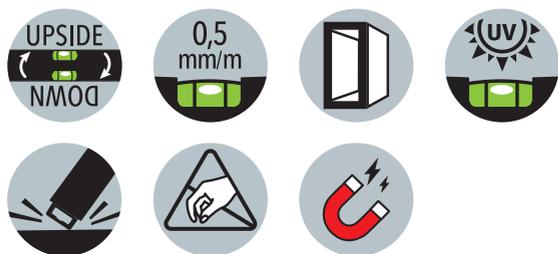

DIGITAL LEVEL M

Accuracy	0° and 90°: 0,1° / rest: 0,2°
Length	60 of 120 cm
Dust and waterproofing	IP65
Magnetic	Yes
Available units	° (degrees), mm/m, %, in/ft
Measuring range	4 x 90°
Shock resistant	Yes
Rotating display	Yes
NEW Q2 2026 25 cm	855.025 € 99,00
60 cm	855.060 € 149,00
120 cm	855.120 € 199,00



Use it upside down as well, thanks to the rotating display.



Measure your inclination angle in multiple units (degrees °, mm/m, %, in/ft).

DIGICORNER

Digital angle meter



DIGICORNER

Accuracy	0,1°
Length	26 cm
Magnetic	No
Available units	° (degrees)
Angle indication	digital
Number of memory slots	1
Bubble level	Yes
Bubble level color	yellow/green
992D T-BEVEL-30 € 69,00	

EAGLE 32

Optical surveying device



EAGLE 32

Accuracy	1,0 mm / 1000m
Lens aperture	36mm
Magnification	32x
Self-levelling range	±15'
Horizontal circle	360°
Dust and waterproofing	IP54
072.32	
€ 179,00	



DISTY

Distances, surfaces, angles,...
all no problem for these
laser distance meters



DISTY 40R COMPACT

DISTY 40R

DISTY 60G

DISTY 80R

Range	40 m	40 m	60 m	80 m
Number of memory slots	-	99	99	99
Slope indication	Yes	Yes	Yes	Yes
Surface area	Yes	Yes	Yes	Yes
Volume	Yes	Yes	Yes	Yes
Accuracy	2 mm	2 mm	2 mm	2 mm
Measurements add / subtract	No	Yes	Yes	Yes
Continuous measurement (minimum and maximum size)	Yes	Yes	Yes	Yes
Number of Pythagoras functions	2	4	4	4
Simple surface calculation	No	Yes	Yes	Yes
Multiple surface calculation	No	Yes	Yes	Yes
Painter's function	No	Yes	Yes	Yes
Stake-out measurement	No	Yes	Yes	Yes
Azimuth	No	No	No	No
Available units	m - inch - ft	m - inch - ft	m - inch - ft	m - inch - ft
Camera	No	No	No	No
Zoom	-	-	-	-
Battery	2x AAA 1.5V	3x AAA or Li-ion (option)	Li-ion or 3x AAA	Li-ion or 3x AAA
Dust and waterproofing	IP54	IP54	IP54	IP54
	210.40R	202.40R	202.60G	202.80R
	€ 39,00	€ 69,00	€ 119,00	€ 89,00



DISTY 120RC

120 m
100
Yes
Yes
Yes
2 mm
Yes
Yes
5
Yes
Yes
Yes
Yes
No
m - inch - ft
Yes
4x
3x AAA or ni-mh (chargeable)
IP54
250.120RC
€ 299,00



DISTY 150GC

150 m
100
Yes
Yes
Yes
2 mm
Yes
Yes
9
Yes
m - inch - ft
Yes
4x
3.7V Li-ion
IP68
255.150GC
€ 399,00

ROLLER 2



Range	2 m
Width of measuring blade	12 mm
Extra thick measuring blade	No
Nylon coated	No
Locking brake	Yes
Pressure brake	No
501.02	
	€ 2,99

MEASURING WHEEL 2.0

No distance is too far



Range	9999,9 m
Accuracy	100 mm
Available units	m
Brake	Yes
270.318A	
	€ 119,00

MULTIPOWER



MULTIPOWER 3.6
COMPACT



MULTIPOWER 4.6

Category	Cat. III - 600V
True RMS	Yes
Voltage DC/AC	max. 600V
Current DC/AC	max. 10A
Range setting	Automatic
Display	Digital, 4000 counts
Flashlight	LED
Resistance	max. 40 MΩ
Capacity	max. 4000μF
Temperature	-
400.36C	
€ 89,00	

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	Yes
Voltage DC/AC	max. 1000V
Current DC/AC	max. 10A
Range setting	Automatic
Display	Digital, 6000 counts
Flashlight	LED
Resistance	max. 60 MΩ
Capacity	max. 6000μF
Temperature	-20°C ~ +760°C
400.46	
€ 189,00	



VOLTTESTER



VOLTTESTER 4.6A



VOLTTESTER 4.6D

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	No
Voltage DC/AC	max. 1000V
Current DC/AC	-
Range setting	Automatic
Display	LED
Resolution	12, 24, 50, 120, 400, 690, 1000V
Flashlight	LED
Frequency	40Hz tot 400Hz
420.46A	
€ 99,00	

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	Yes
Voltage DC/AC	max. 1000V
Current DC/AC	-
Range setting	Automatic
Display	LCD (3 1/2 digit)
Resolution	1V
Flashlight	LED
Frequency	40Hz tot 400Hz
421.46D	
€ 119,00	



AMPCLAMP



AMPCLAMP 200



AMPCLAMP 1000

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	Yes
Voltage	max. 1000V (AC/DC)
Current	200A (AC)
Range setting	Automatic
Display	LCD, 6000 counts
Flashlight	LED
Resistance	max. 60 MΩ
Capacity	max. 4000μF
Diode test	0.35mA typical, Open circuit <3V DC
Continuity check	≤ 50Ω
Input impedance	10MΩ (VDC & VAC)
Temperature	No
Clamp jaw opening	16 mm
	430.200
	€119,00

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	Yes
Voltage	max. 1000V (AC/DC)
Current	600A (AC/DC)
Range setting	Automatic
Display	LCD, 6000 counts
Flashlight	LED
Resistance	max. 60 MΩ
Capacity	max. 100mF
Diode test	0.3mA typical, Open circuit 3.2V DC
Continuity check	≤ 50Ω
Input impedance	10MΩ (VDC & VAC)
Temperature	-20°C ~ 100°C
Clamp jaw opening	35 mm
	431.000
	€ 129,00

VOLTPEN 200-12



Category	Cat. IV - 1000V
True RMS	No
Voltage DC/AC	12V-1000V (AC) 200V-1000V (AC)
Current DC/AC	No
Range setting	Manually
Display	No
Flashlight	LED
	410.212
	€ 19,50

SIGNALTESTER RJ-F

Multifunctional cable tester with tone generator and cycle test for network cables and video cables.

Cable types	Coax, Cat 7, 7a, 6, 6a, 5, 5a, 4, 3
Shielded / Unshielded	Yes / Yes
Voice	RJ11 / RJ12 (4/6 wires)
Data	RJ45 (8 wires)
Video	Type-F (COAX)
Test	Pass / Fail / Reversed / Shorted / Cross Over / Open / Shield / Split
Wiring tester	Included
Distance ID	5 Video / 5 Data
Signal probe	Included
Tone generator	Yes
Maximum length	300m
Maximum resistance	100Ω (DC)
Min. length for split pair	0,5m
Voltage warning	Yes
	450.68C
	€ 109,00




TUBECORDER 5.5 HD DUAL



TUBECORDER 5.5 HD DUAL

Screen	5"
Screen resolution	1280 x 720
Camera diameter	5 mm
Camera resolution	2MP
Front camera	Yes
Front camera focus range	2 cm - 10 cm
Viewing angle	78°
Front object illumination	LED
Side camera	Yes
Side camera focus range	2 cm - 5 cm
Side object illumination	LED
Rotatable camera head	No
Length of flexible tube	5 m
Photo resolution	1920 x 1080
Photo format	.jpg
Video resolution	1280 x 720
Video format	.mp4
TV-out	No
Data output	Micro SD-card
SD card included	Yes
650.552	
€ 299,00	



ACCESSORIES

GOOSENECK 5M X 5.5MM DUAL



Suitable for:
650.552

690.552 € 139,00

GOOSENECK 10M X 8MM TRIPLE




Suitable for:
650.552

690.1083 € 149,00




TUBECORDER 5.8 HD FLEX



TUBECORDER 5.8 HD
FLEX

Screen	5"
Screen resolution	1280 x 720
Camera diameter	8 mm
Camera resolution	2MP
Front camera	Yes
Front camera focus range	2 cm - 10 cm
Viewing angle	78°
Front object illumination	LED
Side camera	Yes
Side camera focus range	2 cm - 5 cm
Side object illumination	LED
Rotatable camera head	350°
Length of flexible tube	5 m
Photo resolution	1920 x 1080
Photo format	.jpg
Video resolution	1280 x 720
Video format	.mp4
TV-out	No
Data output	Micro SD-card
SD card included	Yes
	651.58F
	€ 399,00

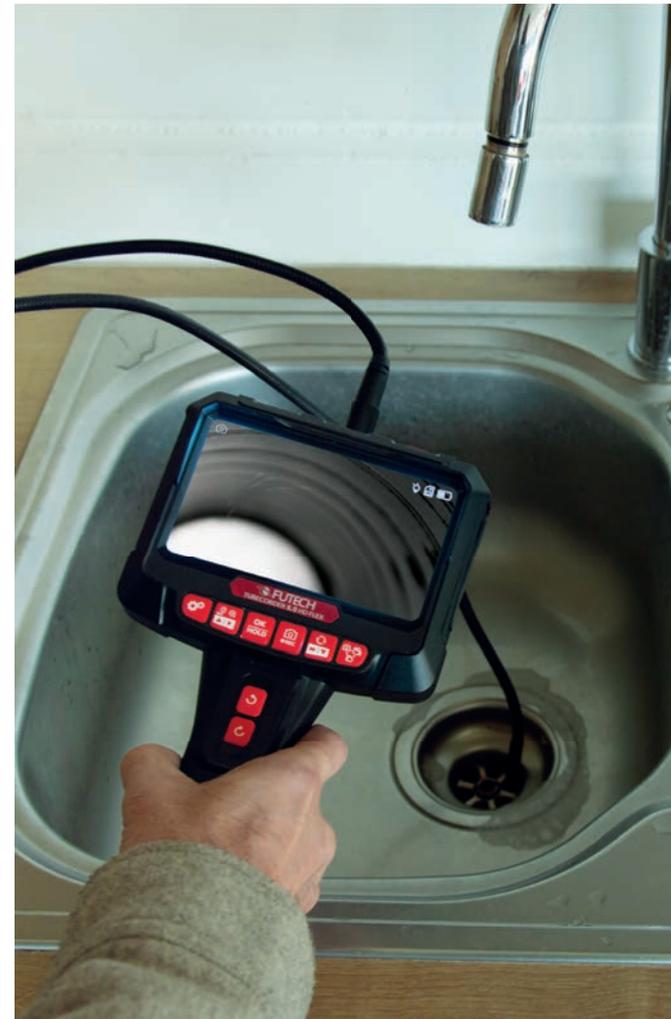

ACCESSORIES

GOOSENECK 5M X 5.5MM
SINGLE (WITHOUT SWIVEL HEAD)



Suitable for:
651.58F

691.551

€ 119,00

GOOSENECK 10M X 8MM
FLEX (WITH SWIVEL HEAD)



Suitable for:
651.58F

691.1082F

€ 199,00

GOOSENECK 5M X 8MM
FLEX (WITH SWIVEL HEAD)



Suitable for:
651.58F

691.582F

€ 169,00

TEMPPOINTER



TEMPPOINTER 9



TEMPPOINTER 9 DEW

Infrared temperature	-50°C - 800°C
Dew point temperature	No
Emissivity	0,10 - 1,00
D:S (distance to spot ratio)	16:1
Accuracy of infrared	-50°C - 20°C: ± 3,5°C 20 - 300°C: ± 1% 300 - 800°C: ± 1,5%
Thermocouple temperature	-50°C - 1370°C
Accuracy of thermocouple	"-50°C - 0°C: ± 2°C 0 - 1370°C: ± 1,5°C"
Spectral response	8 ~ 14 µm
Display	LCD
Display resolution	0,1°C < 1000; 1°C > 1000
Response time	150 ms
Operating temperature	0 ~ 50°C
Relative humidity	10% ~ 90%
Laser	Class 2, <1mW, 630-670nm
Battery	2x 1,5V AAA
	300.09
	€ 79,00

Infrared temperature	-50°C - 800°C
Dew point temperature	Yes
Emissivity	0,10 - 1,00
D:S (distance to spot ratio)	20:1
Accuracy of infrared	-50°C - 20°C: ± 3°C 20 - 300°C: ± 1°C 300 - 800°C: ± 2%
Thermocouple temperature	-
Accuracy of thermocouple	-
Spectral response	8 ~ 14 µm
Display	LCD
Display resolution	0,1°C < 1000; 1°C > 1000
Response time	< 100 ms
Operating temperature	-30°C - 100°C
Relative humidity	0% ~ 100%
Laser	Class 2, <1mW, 630-670nm
Battery	9wwV
	310.09D
	€ 109,00

TEMPVIEWER 9200



Quickly, easily and in real time detect cold or heat zones.



Infrared temperature
Infrared accuracy
Ambient temperature
IR resolution
SuperIR
Emissivity
Spectral response
Display
Display resolution
Camera resolution
Zoom
Laser pointer
Battery
Operating time
Thermal field of view (FOV)
Spatial resolution (IFOV)
Pixel size
Aperture
Frame rate
Thermal sensitivity (NETD)
Focal length
High/low temp. indication
Storage
Flashlight
Measuring points

TEMPVIEWER 9200

-20° ~ 550°
± 2°C
15°C ~ 25°C
96 x 96 (9216 pixels)
240 x 240 (57600 pixels)
0,1 - 1,0
7.5 tot 14 µm
2,4" Color
240 x 320
640 x 480
No
Yes
Li-ion
tot 8u.
50° x 50°
8.89 mrad
12 µm
F1.0
25Hz
< 50mK
1,35 mm
Yes
4 GB Intern
Yes
Center, Hot spot, Cold spot

324.009

€ 299,00

TEMPVIEWER 50K COMPACT

-20° ~ 400°
± 2°C
15°C ~ 25°C
256 x 192 (49152 pixels)
No
0,1 - 1,0
8 tot 14µm
3,5" Touchscreen
640 x 480
3264 x 2448 (8MP)
1.0x - 4.0x
No
Li-ion
tot 4u.
50° x 37.2°
3.43 mrad
12 µm
F1.1
25Hz
< 40mK
3,5 mm
Yes
16 GB Intern
Yes
Center, Hot spot, Cold spot

335.049

€ 699,00

TEMPVIEWER 50K PRO

-20° ~ 550°
± 2°C
15°C ~ 25°C
256 x 192 (49152 pixels)
512 x 384 (196608 pixels)
0,1 - 1,0
7.5 tot 14 µm
3,5" Touchscreen
640 x 480
3264 x 2448 (8MP)
1.0x - 8.0x traploos
Yes
Li-ion
tot 6u.
50° x 37.2°
3,33 mrad
12 µm
F1.0
25Hz
< 40mK
3,6mm
Yes
16 GB Micro SD
Yes
Center, Hot spot, Cold spot, Instelbaar (10 points, 1 line, 5 rectangles, 5 circles)

335.110

€ 1699,00

TEMPVIEWER 50K COMPACT

Powerful thermography camera in pocket size.


The ultra-slim sensor and detailed display provide highly accurate temperature analysis.



TEMPVIEWER 50K PRO

Handheld thermography camera for professional inspections of large objects requiring a wider field of view.

Add voice notes (up to 60 seconds) or text notes (max. 200 characters) to your recordings.

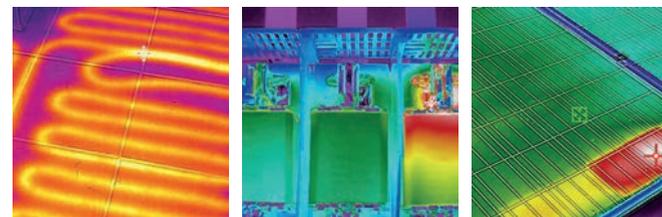

WETPRICKER & HYDRO



WETPRICKER



HYDRO

Measuring depth wood	± 2 mm	20 mm
Measuring depth building materials	± 1 mm	10 mm
Number of wood types	1	8
Number of building material types	1	6
Calibration function	Yes	Yes
Measurement accuracy wood	±2%	±1,5%
Measurement accuracy building materials	±0,1%	0,9 - 1,5%
Maximum moisture	0 - 85% RH	-
Sensor	No	Ultrasonic
Measuring pin	Yes, integrated, replaceable	No
Length of measuring pin	8 mm	-
Measurement range wood	6 - 44%	2 - 65%
Resolution wood	±1%	±0,1%
Measurement range building materials	0,2 - 2,1%	0,1 - 35%
Resolution building materials	±0,05%	±0,1%
	700.08	195.10
	€ 79,00	€ 199,00



