



#TOOLTIPS

09.2026

EN

LASER DISTANCE METER

DISTY 80RW

NEW

Every measurement, wireless on your smartphone.

WLink connect wireless



DISTY DUAL 100G

NEW

Measure in two directions. Position only once.



» 34



MEASURE WITH PLEASURE

SYMBOLS

	Accuracy
	Levelling
	Range with receiver (red lasers)
	Range with receiver (green lasers)
	Dust and water resistance
	Number of 90° angles (floor/ceiling)
	Vertical mode
	Tilt protection
	Scan function
	Wind function
	Fine adjustment of vertical lines
	Tripod thread
	Remote control
	Manual slope
	Electronic slope
	Digital slope
	Battery

VISIT US ONLINE FOR

more product information
product comparisons
product videos
user manuals

...



www.futech-tools.com



*FIND
THE BEST LASER
FOR YOU!*

www.selectlaser.com

FOLLOW US ON SOCIAL MEDIA

FOLLOW US ON

FOLLOW US ON

FOLLOW US ON


FOLLOW US ON




3D BRAVE

Small device, great performance.

Also available in a set with a 160cm tripod and turntable.

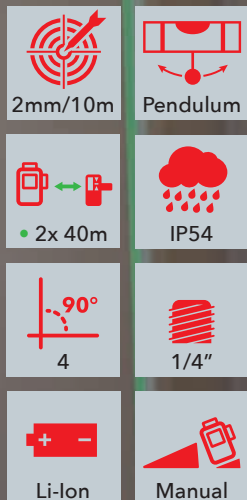

Fine adjustment rotates precisely around the intersection of the vertical lines.

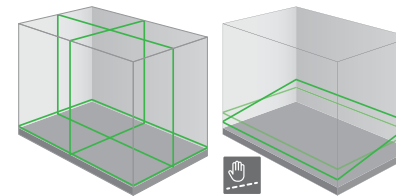


Also available in a set with a 160cm tripod and turntable.



INCLUDED



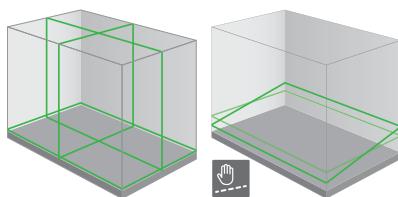






Also available as a set with a 160 cm tripod and a rotary table.

INCLUDED

 (026.3FG)							
↑ H026.CAS ↓ H026.SET	180.20	180.40	130.15	H60033	H60028	H026.TUR (ONLY IN SET)	092.160 (ONLY IN SET)

3D FLOOR

The horizontal laser line only 16 mm above the ground.



MULTICROSS 4D ELECTRONIC

The most comprehensive and user-friendly 4D construction laser.




Second horizontal line 20mm above the ground.



Precise motorized levelling with dual slope.



Remote control with display makes all functions very easy to use.

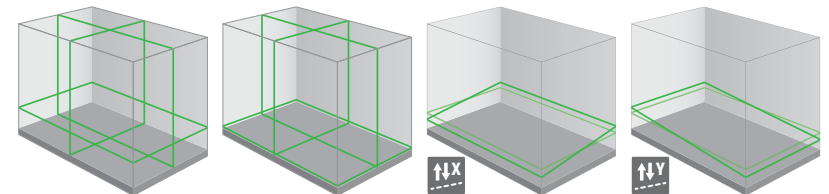

INCLUDED



H034.CAS 180.20 180.40 130.17 130.20 H60028 H60033 H7007

MULTICROSS 3D COMPACT

The family with the strongest laser diodes and all conceivable advantages.



Fine adjustment rotates precisely around the intersection of the vertical lines.



Extra visible laser diodes with an enormous range.



Includes 2 batteries with USB-C connection for charging outside the device.



MULTICROSS 3D COMPACT




MULTICROSS 3D COMPACT






MULTICROSS 4D COMPACT


The most extensive of the family with 4 powerful laser diodes.

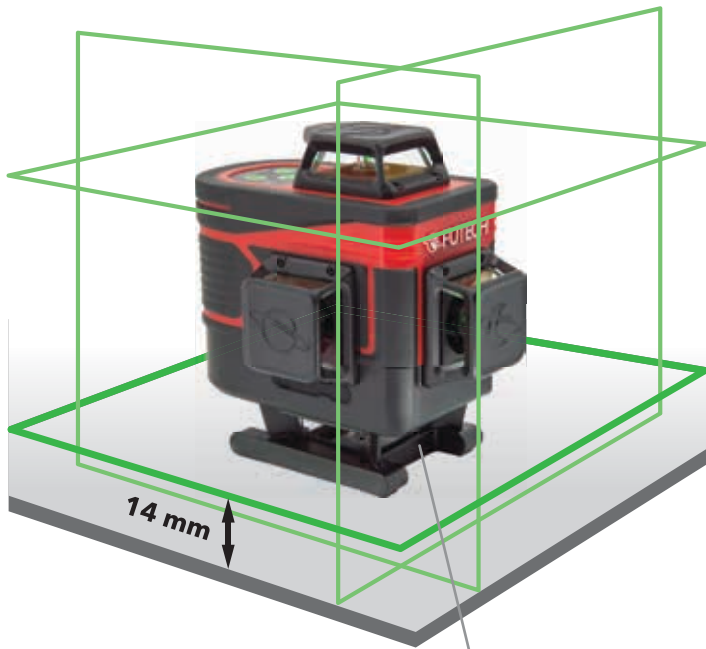

Second horizontal line 14mm above the ground.



INCLUDED

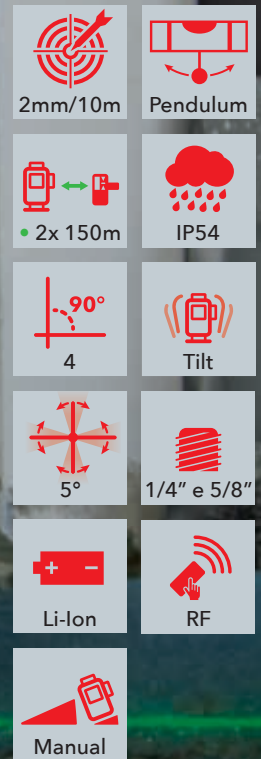

MULTICROSS 4D COMPACT

MULTICROSS 3D

18V/MAX

The first construction laser that works with all your 18V batteries.




18V/MAX

MULTIBRAND BATTERY SYSTEM

MAXIMUM POWER · MAXIMUM SUSTAINABILITY


Use the batteries of **11 well-known brands** with the brand-specific battery adapters.

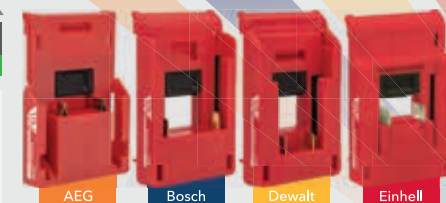

Adapter for the 18V battery of 11 tool brands.

USB-C connector for use with mains power.


Fine adjustment rotates around the intersection of the vertical lines.



INCLUDED



Battery adapters sold separately

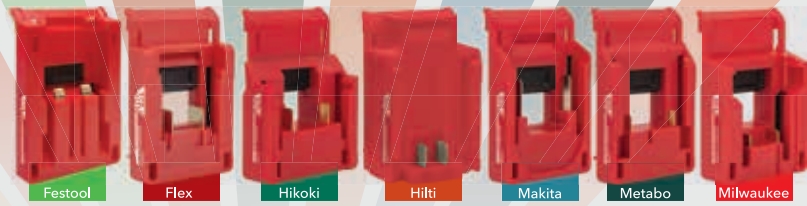

MULTICROSS 4D

18V/MAX

ELECTRONIC

18V battery power with even higher accuracy, slope function and tilt protection thanks to motorized leveling




18V/MAX
ELECTRONIC
REMOTE CONTROL


Even faster positioning with
THE HANDY REMOTE CONTROL.

Motorized leveling on the X- and Y-axis for extra accuracy.


Second horizontal line 20 mm above the floor.

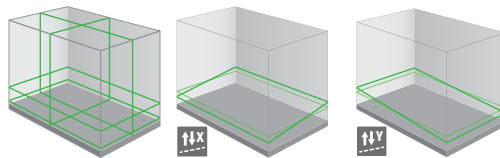

INCLUDED

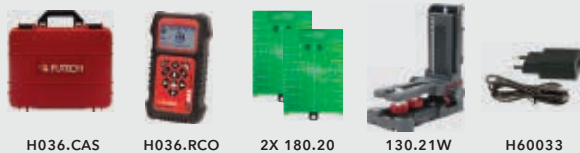

Battery adapters sold separately

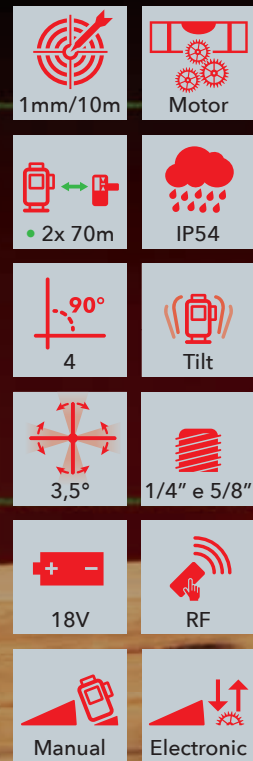

3D/4D LASERS



3D
BRAVE



3D
FLOOR



MULTICROSS 3D
COMPACT



MULTICROSS 3D
COMPACT



MULTICROSS 4D
COMPACT

Visibility					
Accuracy	2mm / 10m	2mm / 10m	2mm / 10m	2mm / 10m	2mm / 10m
Range (with receiver)	2x 40m	2x 40m	2x 120m	2x 150m	2x 150m
Dust and water resistance	IP54	IP54	IP54	IP54	IP54
Batteries	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion
Mains power connection	USB-C	USB-C	USB-C	USB-C	USB-C
Levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling
Plumb bob	Yes	Yes	Yes	Yes	Yes
Number of laser points /line	0	0	0	0	0
90° angles	4	4	4	4	4
Laser frequency	10 KHz	10 KHz	10 KHz	10 KHz	10 KHz
Tilt protection	-	-	-	-	-
Self-levelling range	±3°	±3°	±4°	±4°	±4°
Manual slope	Yes	Yes	Yes	Yes	Yes
Electronic slope	-	-	-	-	-
Digital slope	-	-	-	-	-
Max. electr. adjustable slope	-	-	-	-	-
Remote control	-	-	Radio frequency	Radio frequency	Radio frequency
Built-in screw for tripod	1/4"	1/4"	1/4" (& 5/8")	1/4" (& 5/8")	1/4" (& 5/8")
Laser class	Class 2 - 515nm - <1mW	Class 2 - 515nm - <1mW	Class 2 - 635nm - <1mW	Class 2 - 520nm - <1mW	Class 2 - 520nm - <1mW
	026.3DG	026.3FG	035.3DR	035.3DG	035.4DG
	€ 249,00	€ 249,00	€ 279,00	€ 379,00	€ 419,00
	026.3DG-S	026.3FG-S			
	SET with tripod 160cm and turning table	SET with tripod 160cm and turning table			
	€ 329,00	€ 329,00			



MULTICROSS 4D
ELECTRONIC



1mm / 10m

2x 60m

IP54

Li-ion

USB-C

Motorized levelling

Yes

0

4

10 KHz

Yes

±4°

Yes

Yes

-

± 8,75%

Radio frequency

1/4" (& 5/8")

Class 2 - 515nm - <1mW

034.4DE

€ 589,00



MULTICROSS 3D
18V MAX



2mm / 10m

2x 70m

IP54

18V Li-ion

USB-C

Pendulum levelling

Yes

0

4

10 KHz

-

±4°

Yes

-

-

-

1/4" & 5/8"

Class 2 - 505-525nm - <1mW

036.3DG

€ 329,00



MULTICROSS 4D
18V MAX ELECTRONIC



1mm / 10m

2x 70m

IP54

18V Li-ion

USB-C

Motorized levelling

Yes

0

4

10 KHz

Yes

±3,5°

Yes

Yes

-

± 6,10%

Radio frequency

1/4" & 5/8"

Class 2 - 505-525nm - <1mW

036.4DE

€ 579,00

18V MAX

MULTIBRAND BATTERY SYSTEM

MAXIMUM POWER - MAXIMUM SUSTAINABILITY

AVAILABLE FOR SEPARATE
PURCHASE WITH THE
18V MAX LASERS.



COMPATIBLE WITH
AEG

H036.AEG € 9,00



COMPATIBLE WITH
BOSCH

H036.BOS € 9,00



COMPATIBLE WITH
DEWALT

H036.DEW € 9,00



COMPATIBLE WITH
EINHELL

H036.EIN € 9,00



COMPATIBLE WITH
FESTOOL

H036.FES € 9,00



COMPATIBLE WITH
FLEX

H036.FLE € 9,00



COMPATIBLE WITH
HIKOKI

H036.HIK € 9,00



COMPATIBLE WITH
HILTI

H036.HIL € 9,00



COMPATIBLE WITH
MAKITA

H036.MAK € 9,00



COMPATIBLE WITH
METABO

H036.MET € 9,00



COMPATIBLE WITH
MILWAUKEE

H036.MIL € 9,00

ACCESSORIES

RF REMOTE CONTROL
MULTICROSS 4DE



Suitable for:
034.4DE

H7007

€ 99,00

RF REMOTE CONTROL
18V MAX ELECTRONIC



Suitable for:
036.4DE

H036.RCO

€ 79,00

TURNING TABLE FOR
3D BRAVE AND 3D FLOOR



Suitable for:
026.3DG, 026.3FG

H026.TUR

€ 25,00

TURNING TABLE FOR 3D
/4D COMPACT **NEW**



Suitable for:
035.3DR, 035.3DG,
035.4DG

H035.TUR

€ 15,00

CHARGER / ADAPTER



Suitable for:
011.20R, 011.20G,
026.3DG, 026.3FG,
035.3DR, 035.3DG,
035.4DG, 034.4DE

H60033

€ 29,00

LI-ION BATTERY



Suitable for:
011.20R, 011.20G,
026.3DG, 026.3FG,
035.3DR, 035.3DG,
035.4DG, 034.4DE

H60028

€ 29,00

MINI TRIPOD WITH
SHIFTING BASE



Suitable for:
035.3DR, 035.3DG,
035.4DG, 034.4DE

130.10

€ 69,00

BATTERY HOLDER



Suitable for:
H60028

H60027B (power socket)

H60027U (USB-C) **€ 16,50**

JUPITER 2.0

Ideal for small jobs but with great power.

3mm/10m

Pendulum

40 m

IP54


1/4"

Li-Ion

Manual



Integrated Li-ion battery

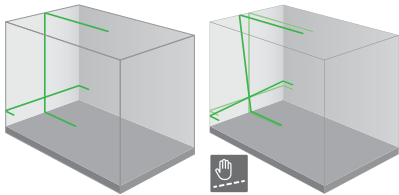

INCLUDED

H009.POU

130.22

SATURN 2.0

The mega visible laser lines and Li-ion battery make this laser very popular among professionals.



2mm/10m

Pendulum


50m

IP54

1/4"

Li-Ion

Manual

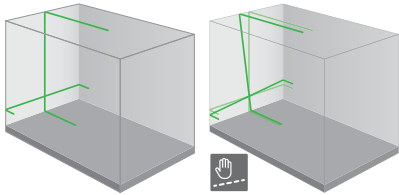

INCLUDED

H011.CAS

180.20


130.15

H60028

H60033

4 corners of 90°

Laser point at the center of each line enhances visibility at long distances, even outdoors.



INCLUDED



HCASE

• 180.20

• 180.40

H60024

H60022

H60030

130.07

MULTICROSS 5 SINGLE DOT

Accurately setting out angles is its speciality.

 1,5mm/10m	 Pendulum
 2x 50m	 IP54
 4	 360°
 5/8"	 Li-Ion
 4x AA	



MULTICROSS 8 HIGH PRECISION SINGLE DOT

The most accurate line laser with 8 laser points that you can also see far outdoors (without a receiver).




- 1mm/10m
- Motor
- 2x 50m
- 2x 50m
- IP54
- 4
- 5/8"
- 360°
- Manual
- Electronic
- Li-Ion

4 corners of 90°

Laser point at the center of each line enhances visibility at long distances, even outdoors.

Fine adjustment makes setting out angles precise and fast, even over long distances.

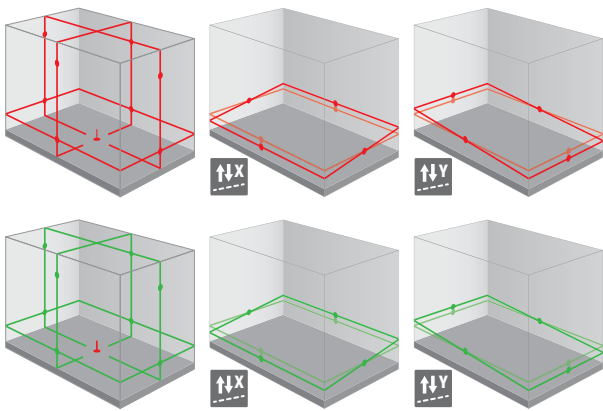

INCLUDED




IP66 enclosure, resistant to water and dust.

Extremely powerful laser lines.

TILT-security

Remote control with interactive display makes manual, electronic, and digital slope adjustment easy.

Fine adjustment for quick and accurate positioning, even at long distances.

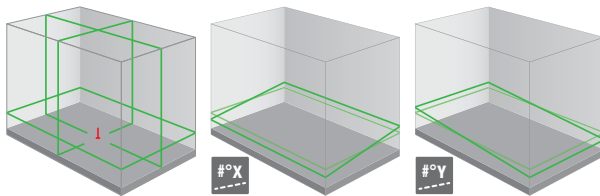




INCLUDED



PROCROSS 8.0 DS

Long distances, slopes in percentage, setting out angles...
Everything you need, with simplicity, both indoors and outdoors.



 1mm/10m	 Motor
 2x 200m	 IP66
 4	 Tilt
 360°	 5/8"
 RF	 Manual
 Electronic	 Digital
 Li-Ion	

OVERVIEW (CROSS) LINE LASERS



JUPITER 2.0



SATURN 2.0



SATURN 2.0

MULTICROSS 5
SINGLE DOT

Visibility				
Accuracy	3mm / 10m	2mm / 10m	2mm / 10m	1,5mm / 10m
Range (with receiver)	40m	50m	50m	2x 50m
Dust and water resistance	IP54	IP54	IP54	IP54
Batteries	Li-ion	Li-ion	Li-ion	Li-ion or 4x AA
Mains power connection	USB-C	USB-C	USB-C	DC Connector
Levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling
Plumb bob	-	-	-	Yes
Number of laser points per line	0	0	0	1
Number of 90° angles on floor and ceiling	0	0	0	4
Laser frequency (in receiver mode)	10 KHz	10 KHz	10 KHz	10 KHz
Tilt protection	-	-	-	-
Self-levelling range	±4°	±3,5°	±3,5°	±2°
Manual slope	Yes	Yes	Yes	Yes
Electronic slope	-	-	-	-
Digital slope	-	-	-	-
Maximum electronically adjustable slope (X-axis / Y-axis)	-	-	-	-
Remote control	-	-	-	-
Built-in screw for tripod	1/4"	1/4"	1/4"	5/8"
Laser class	Class 2 - 520nm - <1mW	Class 2 - 520nm - <1mW	Class 2 - 635nm - <1mW	Class 2 - 510-530nm - <1mW
	009.20G	011.20R	011.20G	033.05G
	€ 89,00	€ 179,00	€ 199,00	€ 339,00



MULTICROSS 8
HIGH PRECISION
SINGLE DOT



1mm / 10m

2x 50m

IP54

Li-ion

DC Connector

Motorized levelling

Yes

1

4

10 KHz

-

±3,5°

Yes

Yes

-

±10%

-

5/8"

Class 3R - 660 nm - 1 mW-<5 mW

040.08

€ 549,00



MULTICROSS 8
HIGH PRECISION
SINGLE DOT



1mm / 10m

2x 50m

IP54

Li-ion

DC Connector

Motorized levelling

Yes

1

4

10 KHz

-

±3,5°

Yes

Yes

-

±10%

-

5/8"

Class 3R - 520 nm - 1 mW-<5 mW

040.08G

€ 649,00



PROCROSS 8.0 DS



1mm / 10m

2x 200m

IP66

Li-ion

DC Connector

Motorized levelling

Yes

0

4

10 KHz

Yes

±3,5°

Yes

Yes

Yes

±10%

Radio frequency

5/8"

Class 2 - 520nm - <1mW

044.80G

€ 1099,00

ACCESSORIES

LI-ION BATTERY



Suitable for:
033.05R, 033.05G

H60022

€ 29,00

LI-ION BATTERY



Suitable for:
011.20R, 011.20G,
026.3DG, 026.3FG,
035.3DR, 035.3DG,
035.4DG, 034.4DE

H60028

€ 29,00

LI-ION BATTERY



Suitable for:
040.08, 040.08G

H60023

€ 69,00

LI-ION BATTERY



Suitable for:
044.80G

H60031

€ 159,00

PROCROSS 8.0 DS REMOTE CONTROL



Suitable for:
044.80G

H7006

€ 199,00

CHARGER / ADAPTER



Suitable for:
033.05R, 033.05G

H60024
H60030

€ 29,00
€ 3,50

CHARGER / ADAPTER



Suitable for:
011.20R, 011.20G,
026.3DG, 026.3FG,
035.3DR, 035.3DG,
035.4DG, 034.4DE

H60033

€ 29,00

CHARGER / ADAPTER



Suitable for:
040.08, 040.08G

H60019

€ 25,00

CHARGER / ADAPTER



Suitable for:
044.80G

H60032

€ 39,00

BATTERY HOLDER



Suitable for:
H60028

H60027B (power socket)

H60027U (USB-C) **€ 16,50**

PARA ONE

One button on the device for simplicity.
Remote control for all advanced functions.

1mm/10m

Motor

2x 300m

IP66

Tilt

Wind

Manual

Li-Ion

Z-axis

Scan


5/8"

Electronic


IR



The Para One, now also with Z-axis.

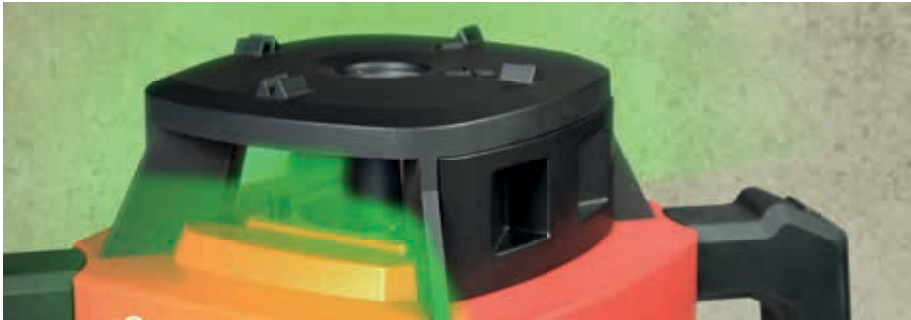

The Anti-reflection clip prevents unwanted reflections.
(included with all Para models.)

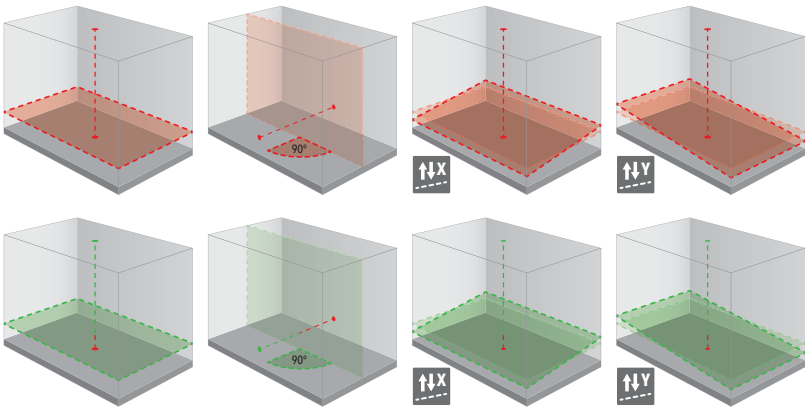

INCLUDED

H052.CAS

• 180.30
• 180.20

• 180.10
• 180.40

• H052.CHR
• H062.CHR


H052.BAT

2X H052.CLI

H7008



Interactive display on both the remote control and the laser makes all functions easy.

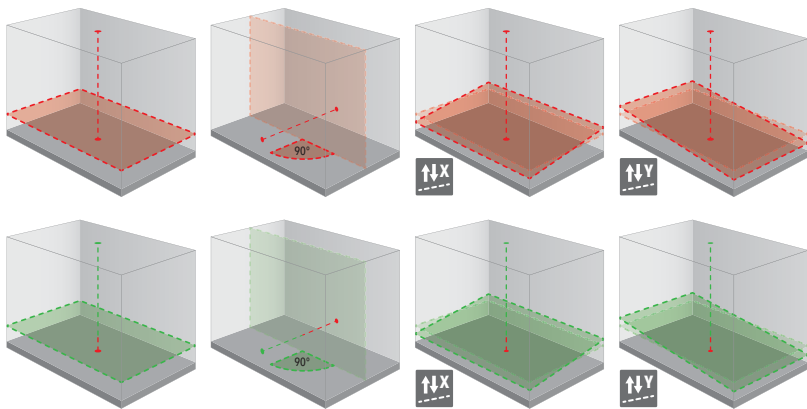


INCLUDED



PARA DS

Setting slopes in percentages is child's play for this comprehensive rotary laser.

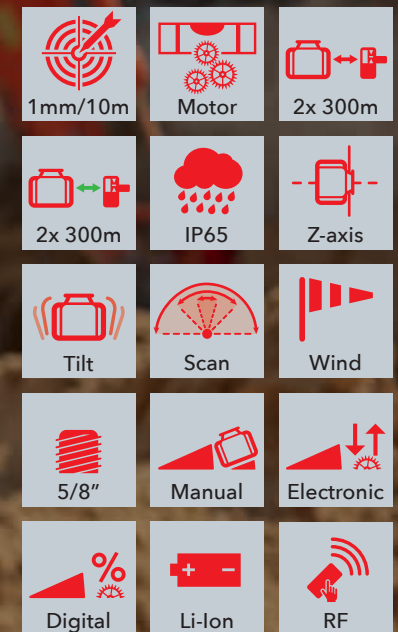

SPINNER


Powerhouse, mainstay, complete and reinvented.



Delivered in a convenient case, with tripod and measuring rod.



- | | |
|----------------|--------------|
|
1,5mm/10 m |
Motor |
|
2x 250 m |
2x 250 m |
|
IP55 |
Z-axis |
|
Tilt |
Scan |
|
5/8" |
Manual |
|
Electronic |
Li-Ion |
|
IR | |

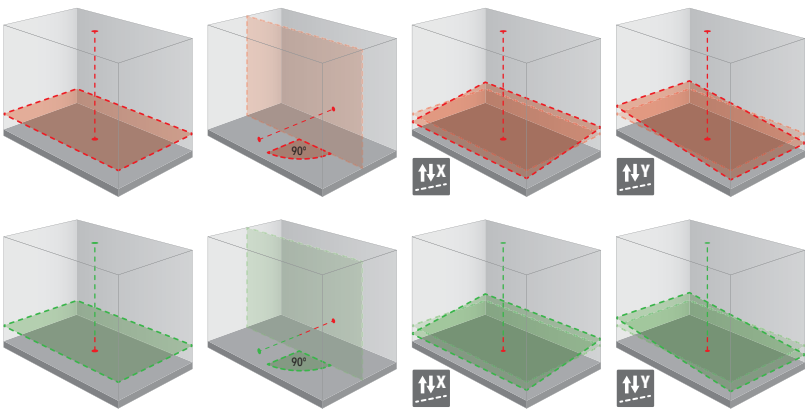

INCLUDED						
H062.CAS	• 180.30 • 180.20	• 180.10 • 180.40	H052.CHR	H7002	100.136	140.200

BULL HEAVY RED

Use our red rotating lasers with your excavator for highly precise ground leveling, featuring 360° all-around laser beam detection.



BULL HEAVY WITH MAGNETS

Extra-strong magnets ensure secure attachment and flexibility for use on multiple machines.

158.36R.MAG

BULL HEAVY WITH MAGNETS

€ 999,00



BULL HEAVY WITH CLAMPS

The robust clamps ensure your receiver doesn't move a millimeter – even when the excavator arm makes rough movements.

158.36R.CLA

BULL HEAVY WITH CLAMPS

€ 999,00



BULL HEAVY CABINE DISPLAY

The cabin display ensures that the position of the laser line can also be read inside the cab, when the receiver on the machine arm is difficult to see.

158.36R.DIS

BULL HEAVY CABINE DISPLAY

€ 99,00



BULL HEAVY

Accuracy fine	±2mm - ±10mm
Accuracy coarse	52mm - ±23mm
Battery	7.2V NiMh / 2500 mAh
Operating time/ Charging time	40h / 15h

OVERVIEW ROTARY LASERS



SPINNER



SPINNER



PARA ONE



PARA ONE

	SPINNER	SPINNER	PARA ONE	PARA ONE
Visibility				
Accuracy	1,5mm / 10m	1,5mm / 10m	1mm / 10m	1mm / 10m
Range (with receiver)	2x 250m	2x 250m	2x 300m	2x 300m
Dust and waterproofing	IP55	IP55	IP66	IP66
Batteries	Li-ion	Li-ion	Li-ion	Li-ion
AC power connection	USB-C	DC Connector	USB-C	USB-C
Levelling	Motorized levelling	Motorized levelling	Motorized levelling	Motorized levelling
Plumb bob (Z-axis)	Yes	Yes	Yes	Yes
Rotations per minute	0, 120, 300, 600 RPM	0, 120, 300, 600 RPM	0, 120, 300, 600, 800 RPM	0, 120, 300, 600, 800 RPM
Scanning function	0°, 10°, 45°, 90°, 180°	0°, 10°, 45°, 90°, 180°	0°, 10°, 45°, 90°, 180°	0°, 10°, 45°, 90°, 180°
Wind function	-	-	Yes	Yes
Tilt protection	Yes	Yes	Yes	Yes
Self-levelling range	±5°	±5°	±5°	±5°
Manual slope	Yes	Yes	Yes	Yes
Electronic slope	Yes	Yes	Yes	Yes
Digital slope	-	-	-	-
Maximum electronically adjustable slope (X-axis / Y-axis)	±10%	±10%	±10%	±10%
Remote control	Infrared	Infrared	Infrared	Infrared
Built-in screw for tripod	5/8"	5/8"	5/8"	5/8"
Laser class	Class 2 - 635nm - <1mW	Class 2 - 515nm - <1mW	Class 2 - 635nm - <1mW	Class 2 - 515nm - <1mW
	062.03R.1E.CS CASE-SET with Gyro Receiver € 699,00	062.03G.1E.CS CASE-SET with Gyro Receiver € 799,00	052.01R.50 with Para Receiver MM € 769,00	052.01G.50 with Para Receiver MM € 869,00
	062.03R.4M.CS CASE-SET with Quattro MM € 879,00	062.03G.4M.CS CASE-SET with Quattro MM € 979,00	052.01R.4M with Quattro MM € 879,00	052.01G.4M with Quattro MM € 979,00


PARA DS


1mm / 10m

2x 300m

IP65

Li-ion

USB-C

Motorized levelling

Yes

0, 120, 300, 600, 800 RPM

0°, 10°, 45°, 90°, 180°

Yes

Yes

±5°

Yes

Yes

Yes

±10%

Radio frequency

5/8"

Class 2 - 635nm - <1mW

052.05R.50


with Para Receiver MM

€ 1319,00
052.05R.4M


with Quattro MM

€ 1429,00

PARA DS


1mm / 10m

2x 300m

IP65

Li-ion

USB-C

Motorized levelling

Yes

0, 120, 300, 600, 800 RPM

0°, 10°, 45°, 90°, 180°

Yes

Yes

±5°

Yes

Yes

Yes

±10%

Radio frequency

5/8"

Class 2 - 515nm - <1mW

052.05G.50


with Para Receiver MM

€ 1419,00
052.05G.4M


with Quattro MM

€ 1529,00

ACCESSORIES

ANTI REFLECTION CLIP


Suitable for:
052.01R, 052.01G,
052.05R, 052.05G

H052.CLI
€ 9,00

CHARGER / ADAPTER (USB-C)


Suitable for:
052.01R, 052.01G,
052.05R, 052.05G,
062.03R

H052.CHR
€ 59,00

PARA ONE / PARA REMOTE CONTROL


Suitable for:
052.01R, 052.01G

H7008
€ 35,00

PARA DS REMOTE CONTROL


Suitable for:
052.05R, 052.05G

H7009
€ 99,00

CHARGER / ADAPTER (DC CONNECTOR)


Suitable for:
062.03G

H062.CHR
€ 59,00

LI-ION BATTERY


Suitable for:
052.01R, 052.01G,
052.05R, 052.05G

H052.BAT
€ 49,00


RECEIVERS



LINE TRACER R/G



GYRO RECEIVER



GYRO RECEIVER



PARA RECEIVER MM



PARA RECEIVER MM


Suitable for					
Accuracy	1 / 3 mm	1 / 2 / 3 mm	1 / 2 / 3 mm	1 / 5 / 10 mm	1 / 5 / 10 mm
Front display	LCD screen	LCD screen	LCD screen	LCD screen + LED	LCD screen + LED
Back display	LCD screen	LCD screen	LCD screen	LCD screen	LCD screen
Distance to laser line (mm)	-	-	-	Yes	Yes
Dust and waterproofing	IP54	IP56	IP56	IP65	IP65
Suitable laser frequency	10 KHz	-	-	-	-
Height of reception field	96 mm	45 mm	45 mm	125 mm	125 mm
Included clamp	H152.CLA	H60009	H60009	H60016	H60016
	152.30.LT	150.10.GS	150.20.GS	152.50R	152.50G
	€ 99,00	€ 119,00	€ 119,00	€ 189,00	€ 189,00

MEASURING
RODS



TELESCOPIC ROD
400 CM

Range (min. and max. height)	120 - 400 cm
Quick clamp for receiver	-
Bubble level	Yes
	140.400
	€ 49,00



TELESCOPIC ROD
500 CM

Range (min. and max. height)	120 - 500 cm
Quick clamp for receiver	-
Bubble level	Yes
	140.500
	€ 59,00



QUATTRO



1 / 2 / 3 mm

LCD screen + LED

LCD screen

-

IP67

7 - 12 KHz

60 mm

H60013

150.40.A
€ 199,00


QUATTRO MM



0,5 / 1 / 2 / 5 / 10 mm

LCD screen + LED

LCD screen

Yes

IP67

7 - 12 KHz

60 mm

H60013

150.40.M
€ 299,00


MAESTRO



0,5 / 1 / 2 / 5 / 10 mm

LCD screen + LED

LCD screen

Yes

IP67

7 - 12 KHz

90 mm

H60013


150.60.R
€ 349,00

AUTOLOCK ROD
240 CM

87 - 240 cm

Yes

Yes

140.240.SK
€ 79,00

AUTOLOCK ROD WITH
SCREW 240 CM

87 - 240 cm

Yes

Yes

140.240.BD
€ 79,00

AUTOLOCK ROD
350 CM

191 - 350 cm

Yes

Yes


140.350.SK
€ 99,00

TRIPODS



LIGHT DUTY 160CM

Range (min. and max. height)	60 - 160 cm
Thread	1/4"
Head	Tilting head
Feet	Rubber
Height adjustment	Fold-out legs + Spindle
	092.160
	€ 39,00



LIGHT DUTY 180CM

Range (min. and max. height)	60 - 180 cm
Thread	1/4" - 5/8"
Head	Fixed
Feet	Rubber
Height adjustment	Fold-out legs + Spindle
	092.180
	€ 49,00



LIGHT DUTY 240CM

Range (min. and max. height)	74 - 240 cm
Thread	1/4" - 5/8"
Head	Tilting head
Feet	Rubber
Height adjustment	Fold-out legs + Spindle
	092.240
	€ 99,00



MEDIUM DUTY 300CM

Range (min. and max. height)	75 - 300 cm
Thread	5/8"
Head	Fixed
Feet	Rubber, Metal pin
Height adjustment	Fold-out legs + Spindle
	090.300
	€ 139,00



ALUMINIUM 165CM

Range (min. and max. height)	100 - 165 cm
Thread	5/8"
Head	Fixed
Feet	Metal pin
Height adjustment	Fold-out legs
	100.165
	€ 89,00



ALUMINIUM 3D 165CM

Range (min. and max. height)	100 - 165 cm
Thread	5/8"
Head	Dome head
Feet	Metal pin
Height adjustment	Fold-out legs
	100.165.D
	€ 99,00



ALUMINIUM 170CM

Range (min. and max. height)	107 - 170 cm
Thread	5/8"
Head	Fixed
Feet	Metal pin
Height adjustment	Fold-out legs
	100.170
	€ 99,00



HEAVY DUTY 330CM

Range (min. and max. height)	128 - 330 cm
Thread	5/8"
Head	Fixed
Feet	Rubber, Metal pin
Height adjustment	Fold-out legs + Spindle
	110.330
	€ 209,00



HEAVY DUTY 400CM

Range (min. and max. height)	170 - 400 cm
Thread	5/8"
Head	Fixed
Feet	Metal pin
Height adjustment	Fold-out legs + Spindle
	110.400
	€ 279,00



SUPPORT
POLES

Easy height
adjustment with
platform



SUPPORT POLE 330CM



Easy to use with
your magnetic wall
mount.



SUPPORT POLE 300CM

Range (min. and max. height)

170 - 400 cm

Thread

1/4" & 5/8"

Head

Fixed

Feet

Plastic foot

Height adjustment

Infinite height adjust. with clamp

120.330**€ 79,00**

160 - 300 cm

-

Fixed

Rubber foot

Autolock

160.300**€ 59,00****BUNDLE OFFER** COMPLETE YOUR ROTARY LASER
WITH A TRIPOD + MEASURING RODTRIPOD 165 CM
+ ROD 200 CM**100.165-B****€ 148,00**TRIPOD 330 CM
+ ROD 240 CM**110.330-B****€ 288,00**

ACCESSORIES

WALL MOUNT BASE
FOR TUBES AND POLESSuitable for:
160.300**H160.SUP****€ 15,00**3-STAR TRIPOD MOUNT
NEWSuitable for:
100.165, 100.165.D,
100.170, 110.330,
110.400**115.55****€ 39,00**

ACCESSORIES

TRIPOD ADAPTER
1/4" M - 5/8" F



130.20 € 9,00

TRIPOD ADAPTER
5/8" M - 1/4" F



130.06 € 9,00

TRIPOD ADAPTER
5/8" M - 5/8" F



130.07 € 15,00

MINI TRIPOD ADAPTER
5/8" M - 1/4" F



130.16 € 5,00

TRIPOD ADAPTER
1/4" M - 5/8" F



130.01 € 20,00

TARGET STICKER YELLOW



180.50 € 6,00

WALL MOUNT WITH
CLAMP AND MAGNET 1/4"




130.08 € 45,00

WALL BRACKET WITH
HEIGHT ADJUSTMENT
AND UNFOLDING SUP-
PORT 1/4"



130.19 € 49,00

MAGNETIC TARGET PLATE



• 180.30 € 9,00
• 180.20 € 9,00

WALLCLAMP WITH
3D HEAD 1/4"



130.09 € 19,00

WALL MOUNT WITH
MICRO ADJUSTMENT,
CLAMP AND MAGNET
1/4"



130.17 € 59,00

LASER GLASSES



• 180.10 € 9,00
• 180.40 € 9,00

SLOPE ADAPTER 5/8"



Suitable for:
EVERY LASER WITH MANUAL SLOPE

115.11 € 139,00

LASER SUPPORT 5/8"
FOR JOIST **NEW**



115.35 € 69,00

18V MAX MAGNETIC WALL MOUNT

18V BATTERY POWER
FOR ANY LASER
COMPATIBLE WITH
11 BATTERY BRANDS




130.21 € 85,00

FLEXIBLE MOUNTING
The wall mount can be used
ON FLAT OR CURVED SURFACES



STURDY CLAMP MOUNTING
Attach the wall mount
TO HORIZONTAL AND VERTICAL PROFILES (up to 14 cm thick)





* Suitable for:
033.05R, 033.05G, 040.08,
040.08G; 044.80G

080.758

€ 89,00

INCLUDED



SMARTBASE

Position the vertical laser beam remotely.

No more endless walking back and forth to bring your laser into position.

Two speeds for extremely precise work.

Quickly move your laser line closer and position it to perfection.

For each cross line laser, centered on the device.*

The hollow central screw ensures the plumb point remains visible on the ground.

Also suitable for other brands.



SPIRITLINE SPIRITLINE M

A solid and robust spirit level that everyone wants to have.
Available in all sizes.



**HIGH
ACCURACY**
0,5mm/m



**EXTRA STRONG
PROFILE**
2mm thick aluminium



**UV-RESISTANT
VIALS**
Anti-discoloration



SHOCKPROOF
Shock-absorbing
end caps



**ESD PROTECTED
(ANTI-STATIC)**
Prevents inaccuracies
caused by static charge



**MAGNETIC
(ONLY SPIRITLINE M)**
Strong magnets on
the underside




SPIRITLINE

SPIRITLINE M 

40 cm	820.040	€ 24,70
60 cm	820.060	€ 33,10
80 cm	820.080	€ 38,90
100 cm	820.100	€ 46,20
120 cm	820.120	€ 54,10
150 cm	820.150	€ 66,70
180 cm	820.180	€ 77,70
200 cm	820.200	€ 86,70

40 cm	825.040	€ 33,60
60 cm	825.060	€ 41,00
80 cm	825.080	€ 50,40
100 cm	825.100	€ 61,50
120 cm	825.120	€ 71,40
150 cm	825.150	€ 84,00
180 cm	825.180	€ 98,70
200 cm	825.200	€ 111,30

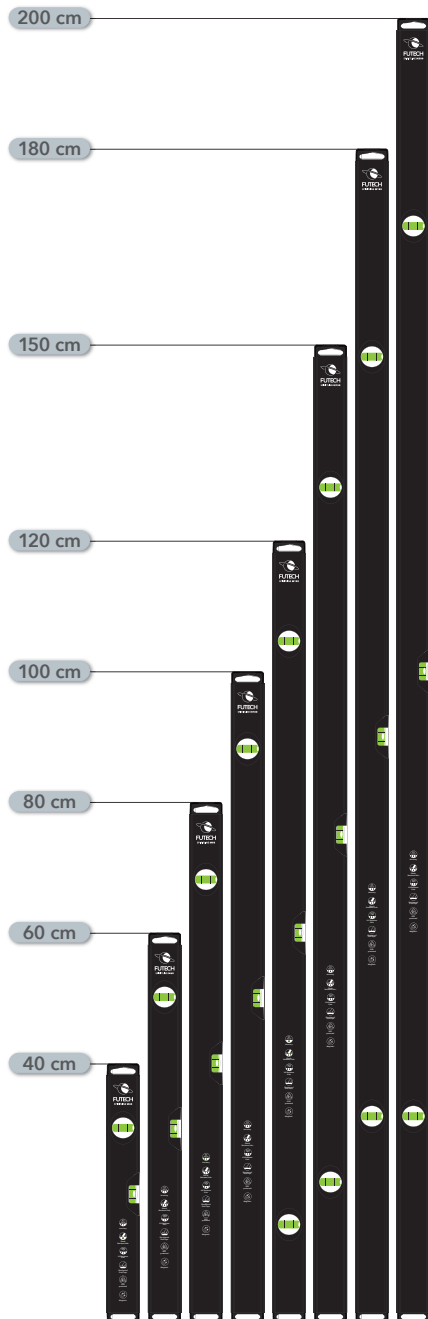

With a magnetic V-groove for accurate measurements on scaffolding and steel pipes, even in tight spaces.

TORPEDOLINE

Robust level with V-groove for easier use on rounded surfaces.



TORPEDOLINE

Accuracy	0,5 mm/m
Length	25 cm
Dust and waterproofing	IP67
Magnetic	Yes
Number of vials	2, horizontal and vertical
Shock resistant	Yes
V-groove	Yes
UV-resistant vials	Yes
845.025	€ 33,00



SPIRITLINE M10

Magnetic on the bottom and on the side.




SPIRITLINE M10

Length	6,5 cm
Magnetic	Yes, bottom and on the side
Number of vials	1
825.010	€ 20,00



DIGITAL LEVEL M

Digital level usable in any direction.
Supplied in a convenient carrying case.

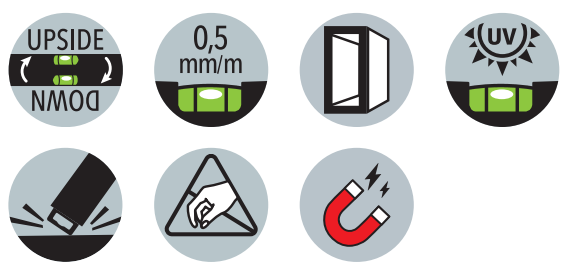

DIGITAL LEVEL M

Accuracy	0° and 90°: 0,1° / rest: 0,2°	
Length	60 or 120 cm	
Dust and waterproofing	IP65	
Magnetic	Yes	
Available units	° (degrees), mm/m, %, in/ft	
Measuring range	4 x 90°	
Shock resistant	Yes	
Rotating display	Yes	
25 cm	855.025	€ 104,00
60 cm	855.060	€ 156,50
120 cm	855.120	€ 209,00



Use it upside down as well, thanks to the rotating display.



Measure your inclination angle in multiple units (degrees °, mm/m, %, in/ft).

DIGICORNER

Digital angle meter



DIGICORNER

Accuracy	0,1°
Length	26 cm
Magnetic	-
Available units	° (degrees)
Angle indication	digital
Number of memory slots	1
Bubble level	Yes
Bubble level color	yellow/green
992D T-BEVEL-30 € 69,00	

EAGLE 32

Optical surveying device



EAGLE 32

Accuracy	1,0 mm / 1000m
Lens aperture	36mm
Magnification	32x
Self-levelling range	±15'
Horizontal circle	360°
Dust and waterproofing	IP54
072.32	
€ 179,00	



DISTY

Distances, surfaces, angles,...
all no problem for these
laser distance meters



	DISTY 40R COMPACT	DISTY 40R	DISTY 60G	DISTY 80RW
Range	40 m	40 m	60 m	80 m
Number of memory slots	-	99	99	99
Slope indication	Yes	Yes	Yes	Yes
Surface area	Yes	Yes	Yes	Yes
Volume	Yes	Yes	Yes	Yes
Accuracy	2 mm	2 mm	2 mm	2 mm
Measurements add / subtract	-	Yes	Yes	Yes
Continuous measurement (minimum and maximum size)	Yes	Yes	Yes	Yes
Number of Pythagoras functions	2	4	4	4
Simple surface calculation	-	Yes	Yes	Yes
Multiple surface calculation	-	Yes	Yes	Yes
Painter's function	-	Yes	Yes	Yes
Stake-out measurement	-	Yes	Yes	Yes
Azimuth	-	-	-	-
Available units	m - inch - ft	m - inch - ft	m - inch - ft	m - inch - ft
Camera	-	-	-	-
Zoom	-	-	-	-
 Wireless connection	-	-	-	Yes, Joyplan
Magnetic	-	-	-	-
Battery	2x AAA 1.5V	3x AAA or Li-ion (option)	Li-ion or 3x AAA	Li-ion or 3x AAA 1.5V
Dust and waterproofing	IP54	IP54	IP54	IP54
	210.40R	202.40R	202.60G	202.80RW
	€ 39,00	€ 69,00	€ 119,00	€ 119,00



DISTY DUAL 100G

2x 100 m
100
Yes
Yes
Yes
2 mm
Yes
Yes
5
Yes
Yes
Yes
Yes
-
m - inch - ft
Yes
4x
-
Yes
3.7V Li-ion
IP54
220.100GD
€ 189,00



DISTY 120RC

120 m
100
Yes
Yes
Yes
2 mm
Yes
Yes
5
Yes
Yes
Yes
Yes
-
m - inch - ft
Yes
4x
-
-
3x AAA or ni-mh (rechargeable)
IP54
250.120RC
€ 299,00



DISTY 150GC

150 m
100
Yes
Yes
Yes
2 mm
Yes
Yes
9
Yes
Yes
Yes
Yes
Yes
m - inch - ft
Yes
4x
-
-
3.7V Li-ion
IP68
255.150GC
€ 399,00

ROLLER 2



Range	2 m
Width of measuring blade	12 mm
Extra thick measuring blade	-
Nylon coated	-
Locking brake	Yes
Pressure brake	-
501.02	
€ 2,99	

MEASURING WHEEL 2.0

No distance is too far



Range	9999,9 m
Accuracy	100 mm
Available units	m
Brake	Yes
270.318A	
€ 129,00	

MULTIPOWER



MULTIPOWER 3.6
COMPACT



MULTIPOWER 4.6

Category	Cat. III - 600V
True RMS	Yes
Voltage DC/AC	max. 600V
Current DC/AC	max. 10A
Range setting	Automatic
Display	Digitaal, 4000 counts
Flashlight	LED
Resistance	max. 40 MΩ
Capacity	max. 4000µF
Temperature	-
400.36C	
€ 89,00	

Cat. IV - 600V / Cat. III - 1000V
Yes
max. 1000V
max. 10A
Automatic
Digitaal, 6000 counts
LED
max. 60 MΩ
max. 6000μF
-20°C ~ +760°C
400.46
€ 189,00



VOLTTESTER



VOLTTESTER 4.6A

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	-
Voltage DC/AC	max. 1000V
Current DC/AC	-
Range setting	Automatic
Display	LED
Resolution	12, 24, 50, 120, 400, 690, 1000V
Flashlight	LED
Frequency	40Hz to 400Hz
420.46A	
€ 99,00	



VOLTTESTER 4.6D

Cat. IV - 600V / Cat. III - 1000V
Yes
max. 1000V
-
Automatic
LCD (3 1/2 digit)
1V
LED
40Hz to 400Hz
421.46D
€ 119,00



AMPCLAMP



AMPCLAMP 200



AMPCLAMP 1000

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	Yes
Voltage	max. 1000V (AC/DC)
Current	200A (AC)
Range setting	Automatic
Display	LCD, 6000 counts
Flashlight	LED
Resistance	max. 60 MΩ
Capacity	max. 4000μF
Diode test	0.35mA typical, Open circuit <3V DC
Continuity check	≤ 50Ω
Input impedance	10MΩ (VDC & VAC)
Temperature	-
Clamp jaw opening	16 mm
430.200	
€ 129,00	

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	Yes
Voltage	max. 1000V (AC/DC)
Current	600A (AC/DC)
Range setting	Automatic
Display	LCD, 6000 counts
Flashlight	LED
Resistance	max. 60 MΩ
Capacity	max. 100mF
Diode test	0.3mA typical, Open circuit 3.2V DC
Continuity check	≤ 50Ω
Input impedance	10MΩ (VDC & VAC)
Temperature	-20°C ~ 100°C
Clamp jaw opening	35 mm
431.000	
€ 139,00	

VOLTPEN 200-12



Category	Cat. IV - 1000V
True RMS	-
Voltage DC/AC	12V-1000V (AC) 200V-1000V (AC)
Current DC/AC	-
Range setting	Manually
Display	-
Flashlight	LED

Category	Cat. IV - 1000V
True RMS	-
Voltage DC/AC	12V-1000V (AC) 200V-1000V (AC)
Current DC/AC	-
Range setting	Manually
Display	-
Flashlight	LED
410.212	
€ 19,50	

SIGNALTESTER RJ-F

Multifunctional cable tester with tone generator and cycle test for network cables and video cables.

Cable types	Coax, Cat 7, 7a, 6, 6a, 5, 5a, 4, 3
Shielded / Unshielded	Yes / Yes
Voice	RJ11 / RJ12 (4/6 wires)
Data	RJ45 (8 wires)
Video	Type-F (COAX)
Test	Pass / Fail / Reversed / Shorted / Crosss Over / Open / Shield / Split
Wiring tester	Included
Distance ID	5 Video / 5 Data
Signal probe	Included
Tone generator	Yes
Maximum length	300m
Maximum resistance	100Ω (DC)
Min. length for split pair	0,5m
Voltage warning	Yes
450.68C	
€ 109,00	



TUBECORDER 5.5 HD DUAL



TUBECORDER 5.5 HD DUAL

Screen	5"
Screen resolution	1280 x 720
Camera diameter	5 mm
Camera resolution	2MP
Front camera	Yes
Front camera focus range	2 cm - 10 cm
Viewing angle	78°
Front object illumination	LED
Side camera	Yes
Side camera focus range	2 cm - 5 cm
Side object illumination	LED
Rotatable camera head	-
Length of flexible tube	5 m
Photo resolution	1920 x 1080
Photo format	.jpg
Video resolution	1280 x 720
Video format	.mp4
TV-out	-
Data output	Micro SD-card
SD card included	Yes
650.552	
€ 319,00	



ACCESSORIES

GOOSENECK 5M X 5.5MM DUAL



Suitable for:
650.552

690.552 € 139,00

GOOSENECK 10M X 8MM TRIPLE



Suitable for:
650.552

690.1083 € 149,00




TUBECORDER 5.8 HD FLEX



TUBECORDER 5.8 HD
FLEX

Screen	5"
Screen resolution	1280 x 720
Camera diameter	8 mm
Camera resolution	2MP
Front camera	Yes
Front camera focus range	2 cm - 10 cm
Viewing angle	78°
Front object illumination	LED
Side camera	Yes
Side camera focus range	2 cm - 5 cm
Side object illumination	LED
Rotatable camera head	350°
Length of flexible tube	5 m
Photo resolution	1920 x 1080
Photo format	.jpg
Video resolution	1280 x 720
Video format	.mp4
TV-out	-
Data output	Micro SD-card
SD card included	Yes
	651.58F
	€ 399,00



ACCESSORIES

GOOSENECK 5M X 5.5MM
SINGLE (WITHOUT SWIVEL
HEAD)



Suitable for:
651.58F

691.551

€ 119,00

GOOSENECK 10M X 8MM
FLEX (WITH SWIVEL HEAD)



Suitable for:
651.58F

691.1082F

€ 199,00

GOOSENECK 5M X 8MM
FLEX (WITH SWIVEL HEAD)



Suitable for:
651.58F

691.582F

€ 169,00



TEMPPOINTER



TEMPPOINTER 9



TEMPPOINTER 9 DEW

Infrared temperature	-50°C - 800°C
Dew point temperature	-
Emissivity	0,10 - 1,00
D:S (distance to spot ratio)	16:1
Accuracy of infrared	-50°C - 20°C: ± 3,5°C 20 - 300°C: ± 1% 300 - 800°C: ± 1,5%
Thermocouple temperature	-50°C - 1370°C
Accuracy of thermocouple	"-50°C - 0°C: ± 2°C 0 - 1370°C: ± 1,5°C"
Spectral response	8 ~ 14 µm
Display	LCD
Display resolution	0,1°C < 1000; 1°C > 1000
Response time	150 ms
Operating temperature	0 ~ 50°C
Relative humidity	10% ~ 90%
Laser	Class 2, <1mW, 630-670nm
Battery	2x 1,5V AAA
300.09	
€ 89,00	

Infrared temperature	-50°C - 800°C
Dew point temperature	Yes
Emissivity	0,10 - 1,00
D:S (distance to spot ratio)	20:1
Accuracy of infrared	-50°C - 20°C: ± 3°C 20 - 300°C: ± 1°C 300 - 800°C: ± 2%
Thermocouple temperature	-
Accuracy of thermocouple	-
Spectral response	8 ~ 14 µm
Display	LCD
Display resolution	0,1°C < 1000; 1°C > 1000
Response time	< 100 ms
Operating temperature	-30°C - 100°C
Relative humidity	0% ~ 100%
Laser	Class 2, <1mW, 630-670nm
Battery	9wwV
310.09D	
€ 119,00	

TEMPVIEWER 9200



Quickly, easily and in real time detect cold or heat zones.



Infrared temperature
Infrared accuracy
Ambient temperature
IR resolution
SuperIR
Emissivity
Spectral response
Display
Display resolution
Camera resolution
Zoom
Laser pointer
Battery
Operating time
Thermal field of view (FOV)
Spatial resolution (IFOV)
Pixel size
Aperture
Frame rate
Thermal sensitivity (NETD)
Focal length
High/low temp. indication
Storage
Flashlight
Measuring points

TEMPVIEWER 9200

-20° ~ 550°
± 2°C
15°C ~ 25°C
96 x 96 (9216 pixels)
240 x 240 (57600 pixels)
0,1 - 1,0
7.5 to 14 µm
2,4" Color
240 x 320
640 x 480
-
Yes
Li-ion
up to 8h
50° x 50°
8.89 mrad
12 µm
F1.0
25Hz
< 50mK
1,35 mm
Yes
4 GB Intern
Yes
Center, Hot spot, Cold spot

324.009

€ 299,00

TEMPVIEWER 50K
COMPACT

-20° ~ 400°
± 2°C
15°C ~ 25°C
256 x 192 (49152 pixels)
-
0,1 - 1,0
8 to 14µm
3,5" Touchscreen
640 x 480
3264 x 2448 (8MP)
1.0x - 4.0x
-
Li-ion
up to 4h.
50° x 37.2°
3.43 mrad
12 µm
F1.1
25Hz
< 40mK
3,5 mm
Yes
16 GB Intern
Yes
Center, Hot spot, Cold spot

335.049

€ 699,00

TEMPVIEWER 50K
PRO

-20° ~ 550°
± 2°C
15°C ~ 25°C
256 x 192 (49152 pixels)
512 x 384 (196608 pixels)
0,1 - 1,0
7.5 to 14 µm
3,5" Touchscreen
640 x 480
3264 x 2448 (8MP)
1.0x - 8.0x stepless
Yes
Li-ion
up to 6h
50° x 37.2°
3,33 mrad
12 µm
F1.0
25Hz
< 40mK
3,6mm
Yes
16 GB Micro SD
Yes
Center, Hot spot, Cold spot, Instelbaar (10 points, 1 line, 5 rectangles, 5 circles)


335.110

€ 1699,00

TEMPVIEWER 50K
COMPACT




Powerful thermography camera in pocket size.

The ultra-slim sensor and detailed display provide highly accurate temperature analysis.

TEMPVIEWER 50K
PRO

Handheld thermography camera for professional inspections of large objects requiring a wider field of view.

Add voice notes (up to 60 seconds) or text notes (max. 200 characters) to your recordings.



MULTISCAN DUO

NEW


Detects wood, metal and live wires hidden in walls, ceilings and floors.



Detection depth for ferrous materials
Detection depth for non-ferrous materials
Detection depth for live wires
Detection depth for wood
Detection depth for copper
Graphical indication of detection depth

MULTISCAN DUO
120 mm
110 mm
50 mm
20 - 38 mm
40 mm
Yes
520.12L
€ 79,00

DRILL POINTER

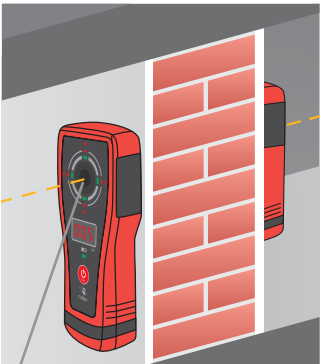

Know where your drill will end, even before you start drilling.



LED indicators (receiver)
LED display (receiver)
Audible signal (receiver)
Maximum wall thickness
Wall thickness measurements
Depth accuracy
Wall thickness accuracy
LED indicators (transmitter)
LED display (transmitter)
Audible signal (transmitter)

DRILL POINTER
13
Yes
Yes
2-150 cm
2-200 cm
± 5%
± 3 mm (no reinforcement) ± 10 mm (with reinforcement)
1
-
-
571.150
€ 349,00

WETPRICKER & HYDRO




WETPRICKER



HYDRO

Measuring depth wood	± 2 mm	20 mm
Measuring depth building materials	± 1 mm	10 mm
Number of wood types	1	8
Number of building material types	1	6
Calibration function	Yes	Yes
Measurement accuracy wood	±2%	±1,5%
Measurement accuracy building materials	±0,1%	0,9 - 1,5%
Maximum moisture	0 - 85% RH	-
Sensor	-	Ultrasonic
Measuring pin	Yes, integrated, replaceable	-
Length of measuring pin	8 mm	-
Measurement range wood	6 - 44%	2 - 65%
Resolution wood	±1%	±0,1%
Measurement range building materials	0,2 - 2,1%	0,1 - 35%
Resolution building materials	±0,05%	±0,1%
	700.08	195.10
	€ 79,00	€ 199,00





your FUTECH dealer

Warranty provisions

FUTECH measuring instruments are made with carefully selected components and manufactured with the utmost care, so that we can offer you products of superior quality. In the unlikely event of your product becoming defective because of material or manufacturing faults, you can benefit from a manufacturer's warranty of 5 years on all products (see below for some exceptions). During this period, your device will be repaired or replaced free of charge if all the following conditions are met:

1. Your device was purchased from an authorised FUTECH distributor and returned to an authorised FUTECH distributor within the warranty period. As proof, you attach a copy of the purchase invoice stating the type and serial number of the device to the defective product.
2. You send the defective product to an authorised FUTECH distributor in its original protective packaging (fabric bag, plastic case, etc.) to avoid additional damage during transport to the FUTECH service centre.
3. The product does not show signs of damage caused by inappropriate use (e.g. crack(s) due to a fall, internal sand/dirt/water damage, blown or replaced fuses, damage due to use of incorrect charger/adaptor, leaky batteries, attempt to remove or alter the serial number, damage after opening the product, etc.)
4. The product does not show signs of handling or (partial) repair by an unauthorised service centre (e.g. opening of the product, use of non-original parts, etc.).
5. The damage has not been caused by using non-original FUTECH accessories.

Exceptions:

- The manufacturer's warranty does NOT cover periodic maintenance work. Preventive or periodic calibration is not covered by the warranty against material or manufacturing faults as this is a logical consequence of normal use of the device.
- The manufacturer's warranty on all batteries is limited to 1 year.
- FUTECH offers a warranty of 6 months on all repairs or replacements provided by an authorised FUTECH service centre.

The manufacturer's warranty is granted to the first owner of the device as stated on the invoice of the authorised FUTECH distributor. The warranty cannot be transferred to any other party.

All repair costs (e.g. transport, parts, labour, etc.) for repairs not covered by the manufacturer's warranty shall be borne in full by the user.



Changes in price, shape, design and possible printing errors are reserved.
Images used are not binding. Prices exclude taxes (VAT, BEBAT, RECUPEL, etc.) and are valid until 28-02-2027 or while stocks last.