

MULTICROSS 3D 18V MAX

WORKS WITH BATTERIES OF 7 WELL-KNOWN BRANDS!



WALL SCANNER

DRILL POINTER



Know where your drill will exit, even before you start drilling.

» 34

ELECTRICITY

AMPCLAMP 200



Measure voltage contactless thanks to the open clamp meter.

» 29



MULTIBRAND BATTERY SYSTEM
MAXIMUM POWER · MAXIMUM SUSTAINABILITY

» 7

-  Bosch*
-  Dewalt*
-  Festool*
-  Hikoki*
-  Makita*
-  Metabo*
-  Milwaukee*

SYMBOLS



1mm/10m



Pendulum



Motor



2x 120m



2x 200m



2x 300m



2x 120m



2x 200m



2x 300m



IP66



4



Z-axis



Tilt



Tilt



Tilt



Scan



Wind



6°



1/4" e 5/8"



RF



IR



Manual



Manual



Manual



Electronic



Digital



Li-Ion

Accuracy

Levelling

Range with receiver (red lasers)

Range with receiver (green lasers)

Dust and water resistance

Number of 90° angles (floor/ceiling)

Vertical mode

Tilt protection

Scan function

Wind function

Fine adjustment of vertical lines

Tripod thread

Remote control

Manual slope

Electronic slope


Digital slope

Battery

MULTICROSS 3D BRAVE

Small device, great performance.

Also available in a set with a 160cm tripod and turntable.

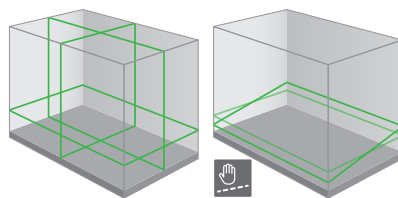

INCLUDED



2mm/10m



Pendulum



• 2x 40m



IP54



4



1/4"



Li-Ion




Manual

MULTICROSS 3D FLOOR

13mm above the floor.











Also available in a set with a 160cm tripod.

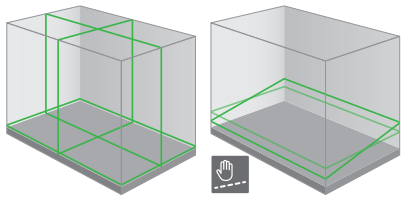

INCLUDED

							
↑ H028.POU ↓ H028.POU	180.20	180.40	130.12	H60022	H60024	H60030	092.160 (ONLY IN SET)

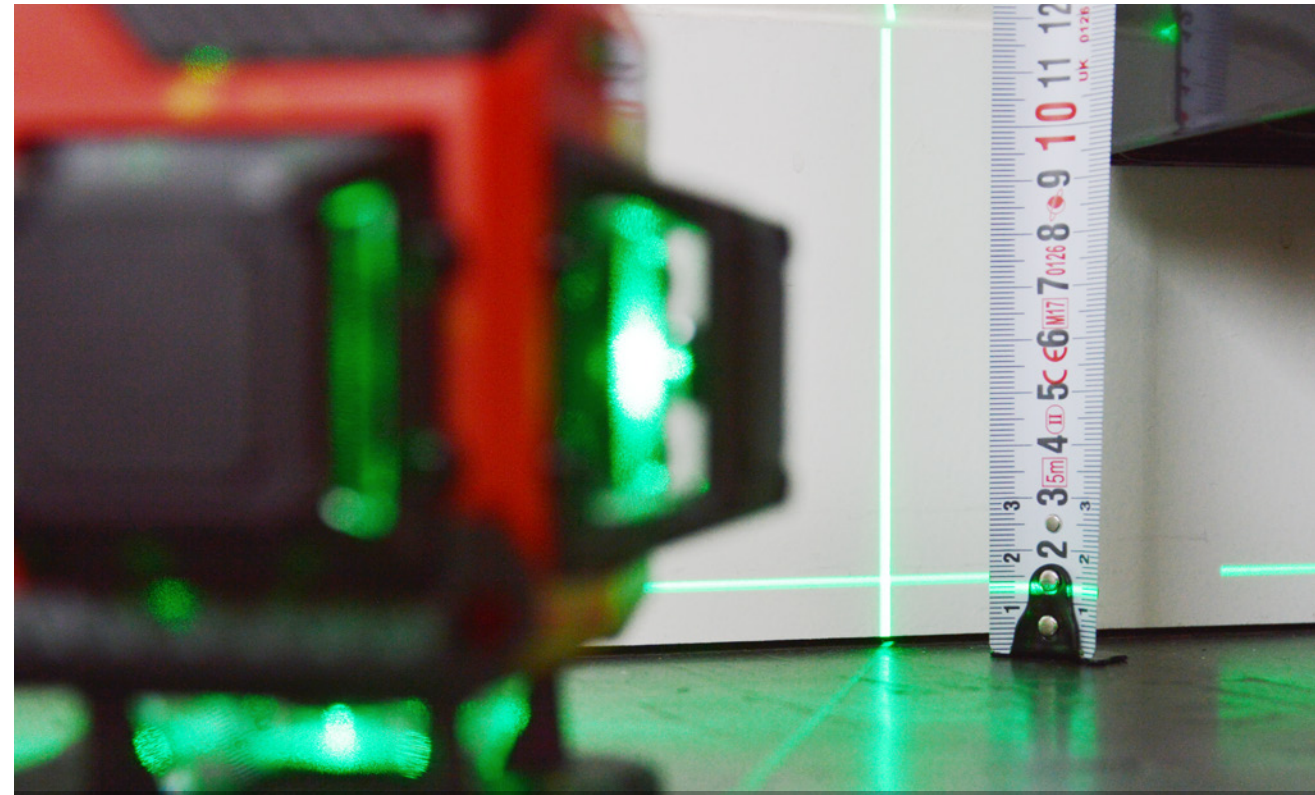

MULTICROSS 3D COMPACT



The family with the strongest laser diodes and all conceivable advantages.






Fine adjustment rotates precisely around the intersection of the vertical lines.

Extra visible laser diodes with an enormous range.

Second battery for longer autonomy.




MULTICROSS 3D COMPACT






MULTICROSS 3D COMPACT

MULTICROSS 4D COMPACT


The most extensive of the family with 4 powerful laser diodes.

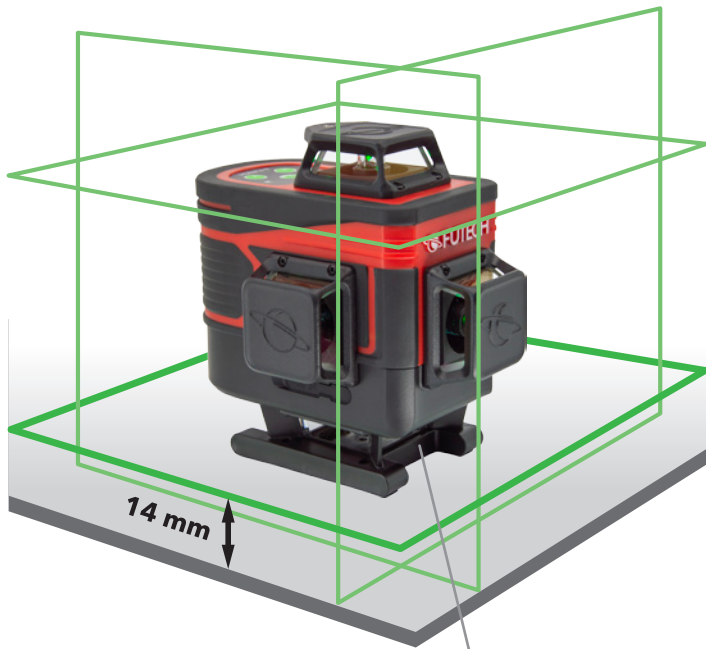

Second horizontal line 14mm above the ground.



INCLUDED

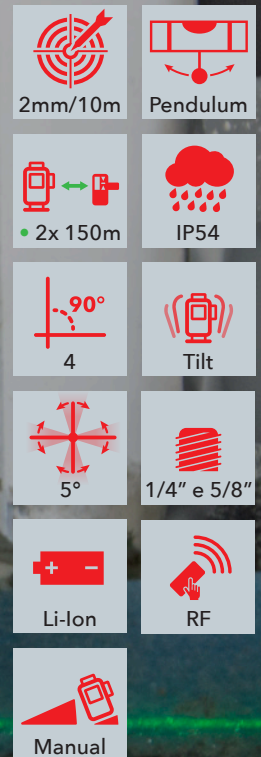

MULTICROSS 4D COMPACT

MULTICROSS 4D ELECTRONIC

The most comprehensive and user-friendly 4D construction laser.




Second horizontal line 20mm above the ground.



Precise motorized levelling with dual slope.



Interactive Radio Frequency remote control.

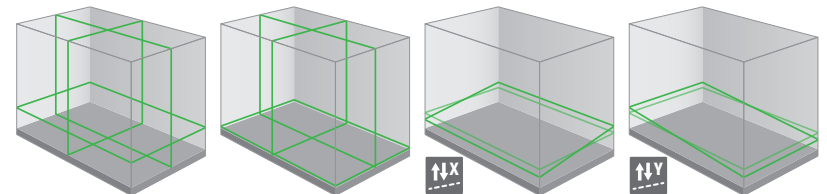

INCLUDED






Adapter for the 18V battery
of 7 tool brands.

USB-C connector for use
with mains power.

Fine adjustment rotates
around the intersection
of the vertical lines.



BOSCH
H036.BOS

DEWALT
H036.DEW

FESTOOL
H036.FES


HIKOKI
H036.HIK

MAKITA
H036.MAK

METABO
H036.MET

MILWAUKEE
H036.MIL

INCLUDED

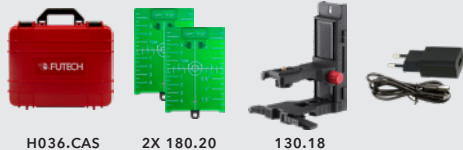



Battery adapters
sold separately

MULTICROSS 3D 18V/MAX

MULTIBRAND BATTERY SYSTEM

MAXIMUM POWER · MAXIMUM SUSTAINABILITY

The first construction laser that works
with all your 18V batteries.

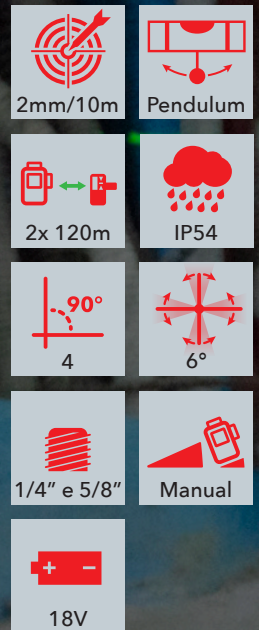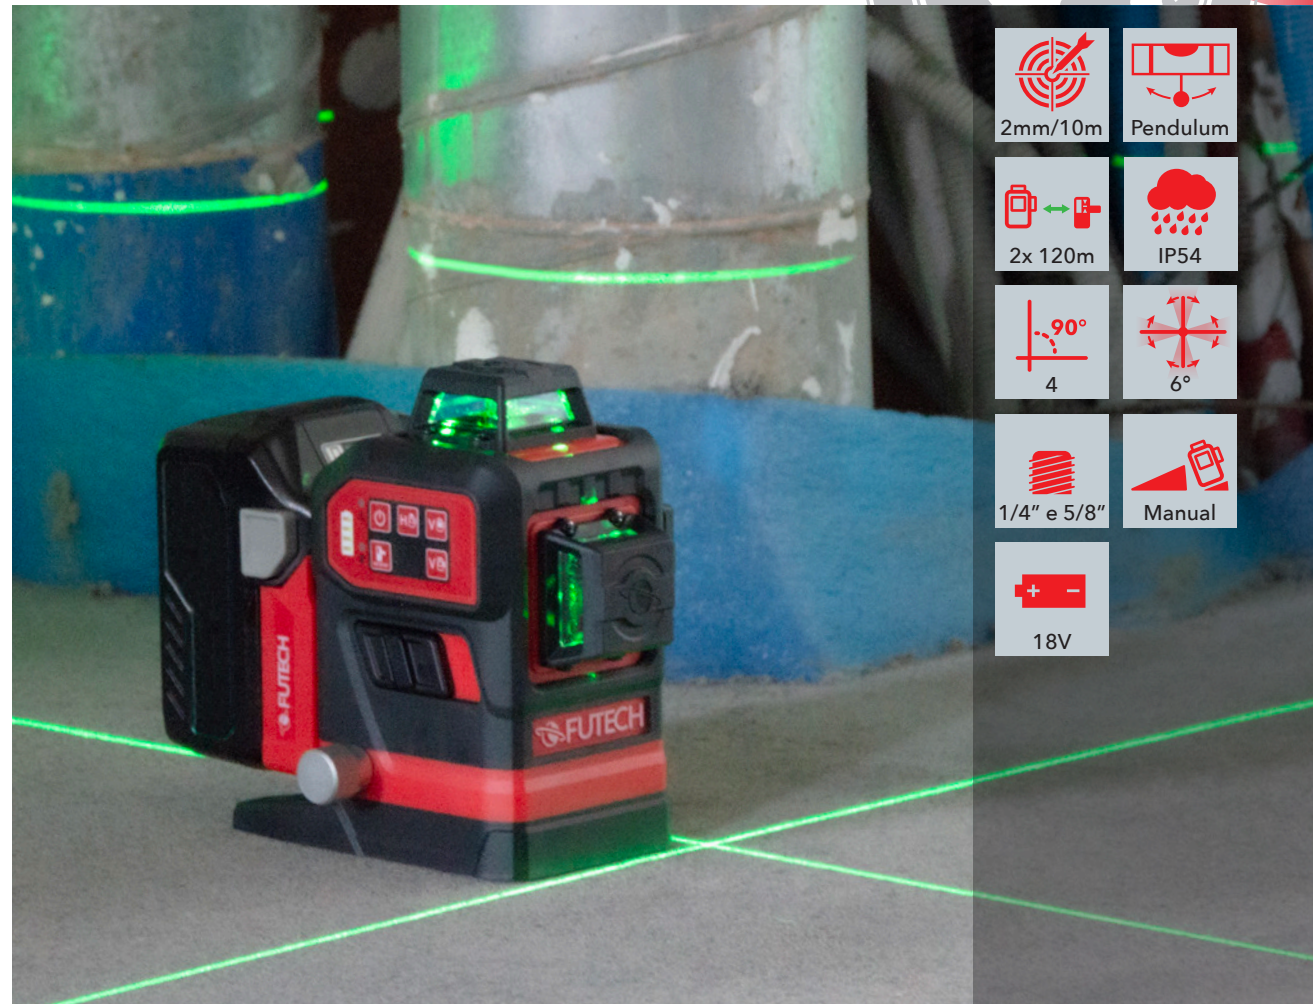

OVERVIEW 3D/4D LASERS



MULTICROSS 3D
BRAVE



MULTICROSS 3D
FLOOR



MULTICROSS 3D
COMPACT



MULTICROSS 3D
COMPACT

Visibility				
Accuracy	2mm / 10m	2mm / 10m	2mm / 10m	2mm / 10m
Range (with receiver)	2x 40m	2x 40m	2x 120m	2x 150m
Dust and water resistance	IP54	IP54	IP54	IP54
Batteries	Li-ion	Li-ion or 4x AA	Li-ion	Li-ion
Mains power connection	USB-C	DC Connector	USB-C	USB-C
Levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling
Plumb bob	Yes	Yes	Yes	Yes
Number of laser points per line	0	0	0	0
Number of 90° angles on floor and ceiling	4	4	4	4
Laser frequency (in receiver mode)	10 KHz	10 KHz	10 KHz	10 KHz
Tilt protection	No	No	No	No
Self-levelling range	±3°	±3°	±4°	±4°
Manual slope	Yes	Yes	Yes	Yes
Electronic slope	No	No	No	No
Digital slope	No	No	No	No
Maximum electronically adjustable slope (X-axis / Y-axis)	-	-	-	-
Remote control	No	No	Radio frequency	Radio frequency
Built-in screw for tripod	1/4"	1/4"	1/4" (& 5/8")	1/4" (& 5/8")
Laser class	Class 2 - 515nm - <1mW	Class 2 - 515nm - <1mW	Class 2 - 635nm - <1mW	Class 2 - 520nm - <1mW
	027.3DG	028.3FG	035.3DR	035.3DG
	€ 249,00	€ 249,00	€ 279,00 € 259,00	€ 379,00 € 349,00
	027.3DG-S	028.3FG-S	035.3DR-P	035.3DG-P
	SET with tripod 160cm and turning table	SET with tripod 160cm	PROMO with tripod 180cm	PROMO with tripod 180cm
	€ 329,00 € 299,00	€ 329,00 € 289,00	€ 328,00 € 299,00	€ 428,00 € 389,00



MULTICROSS 4D
COMPACT



2mm / 10m

2x 150m

IP54

Li-ion

USB-C

Pendulum levelling

Yes

0

4

10 KHz

No

±4°

Yes

No

No

-

Radio frequency

1/4" (& 5/8")

Class 2 - 520nm - <1mW

035.4DG

~~€ 419,00~~

€ 389,00

035.4DG-P

PROMO
with tripod 180cm

~~€ 468,00~~

€ 429,00



MULTICROSS 4D
ELECTRONIC



1mm / 10m

2x 60m

IP54

Li-ion

USB-C

Motorized levelling

Yes

0

4

10 KHz

Yes

±4°

Yes

Yes

No

8,75%

Radio frequency

1/4" (& 5/8")

Class 2 - 515nm - <1mW

034.4DE

~~€ 589,00~~

€ 519,00

034.4DE-P

PROMO
with tripod 180cm

~~€ 638,00~~

€ 559,00



MULTICROSS 3D
18VMAX



2mm / 10m

2x 120m

IP54

18V Li-ion

USB-C

Pendulum levelling

Yes

0

4

10 KHz

No

±4°

Yes

No

No

-

No

1/4" & 5/8"

Class 2 - 505-525nm - <1mW

036.3DG

€ 319,00

036.3DG-P

PROMO
with tripod 180cm

~~€ 368,00~~

€ 359,00



18V/MAX

MULTIBRAND BATTERY SYSTEM

MAXIMUM POWER · MAXIMUM SUSTAINABILITY

AVAILABLE FOR SEPARATE
PURCHASE WITH THE
MULTICROSS 3D 18VMAX.



COMPATIBLE WITH
BOSCH

H036.BOS

€ 9,00



COMPATIBLE WITH
DEWALT

H036.DEW

€ 9,00



COMPATIBLE WITH
FESTOOL

H036.FES

€ 9,00



COMPATIBLE WITH
HIKOKI

H036.HIK

€ 9,00



COMPATIBLE WITH
MAKITA

H036.MAK

€ 9,00



COMPATIBLE WITH
METABO

H036.MET

€ 9,00



COMPATIBLE WITH
MILWAUKEE

H036.MIL

€ 9,00

ACCESSORIES

LI-ION BATTERY



Suitable for:
028.3FG, 033.05R,
033.05G

H60022

€ 29,00



CHARGER / ADAPTER + CONNECTION CABLE

Suitable for:
028.3FG, 033.05R,
033.05G

**H60024
H60030**

**€ 29,00
€ 3,50**

LI-ION BATTERY



Suitable for:
011.20R, 011.20G,
027.3DG, 035.3DR,
035.3DG, 035.4DG,
034.4DE

H60028

€ 29,00



Suitable for:
011.20R, 011.20G,
027.3DG, 035.3DR,
035.3DG, 035.4DG,
034.4DE

H60033

€ 29,00

TURNING TABLE FOR MULTICROSS 3D BRAVE



Suitable for:
027.3DG

H027.TUR

€ 29,00



MINI TRIPOD WITH SHIFTING BASE

Suitable for:
027.3DG, 028.3FG,
035.3DR, 035.3DG,
035.4DG, 034.4DE

130.10

€ 69,00

RF REMOTE CONTROL MULTICROSS 4D




Suitable for:
034.4DE

H7007

€ 99,00

JUPITER 2.0

The ideal laser for small jobs

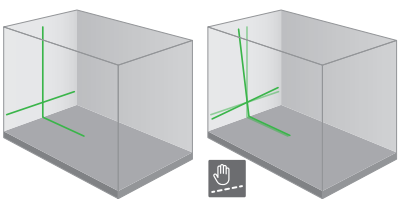


INCLUDED



H009.POU 130.11

SATURN 2.0

The mega visible laser lines and Li-ion battery make this laser very popular among professionals.

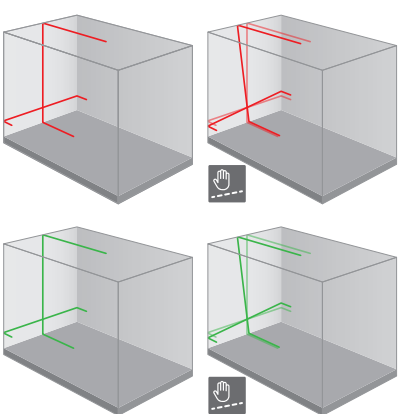



INCLUDED



H011.POA 180.30 180.20 130.15 H60028 H60033

4 corners of 90°

Laser point at the center of each line enhances visibility at long distances, even outdoors.



INCLUDED



HCASE



• 180.30
• 180.20



• 180.10
• 180.40



H60024



H30022



H60030



130.07

MULTICROSS 5 SINGLE DOT

Accurately setting out angles is its speciality.


 1,5mm/10m	 Pendulum
 2x 50m	 2x 50m
 IP54	 4
 360°	 5/8"
 Li-Ion	 4x AA




MULTICROSS 8 HIGH PRECISION SINGLE DOT

The most accurate line laser with 8 laser points that you can also see far outdoors (without a receiver).



 1mm/10m	 Motor
 2x 50m	 2x 50m
 IP54	 4
 5/8"	 360°
 Manual	 Electronic
 Li-Ion	

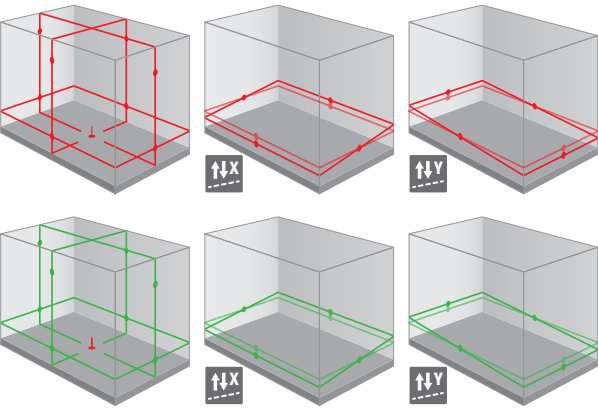

INCLUDED					
					
HCASE.Y	• 180.30 • 180.20	• 180.10 • 180.40	H60019	H60023	130.07

IP66 enclosure, resistant to water and dust.


Extremely powerful laser lines.



TILT-security

Remote control with interactive display makes manual, electronic, and digital slope adjustment easy.

Fine adjustment for quick and accurate positioning, even at long distances.

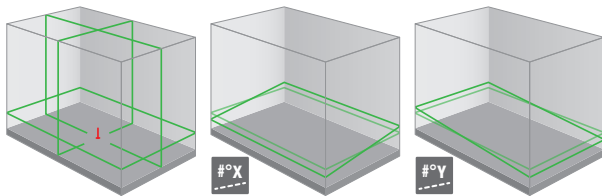

INCLUDED



HCASE.P



180.20



180.40



H60032



H60031




H7006



130.07

PROCROSS 8.0 DS

Long distances, slopes in percentage, setting out angles...
Everything you need, with simplicity, both indoors and outdoors.

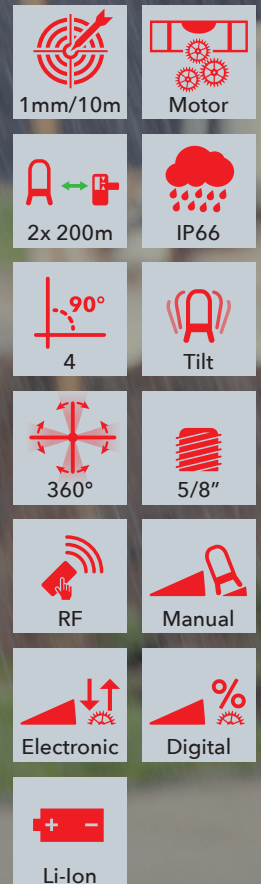

OVERVIEW CROSS LINE LASERS



JUPITER 2.0



SATURN 2.0



SATURN 2.0

MULTICROSS 5
SINGLE DOT

	JUPITER 2.0	SATURN 2.0	SATURN 2.0	MULTICROSS 5 SINGLE DOT
Visibility				
Accuracy	3mm / 10m	2mm / 10m	2mm / 10m	1,5mm / 10m
Range (with receiver)	40m	50m	50m	2x 50m
Dust and water resistance	IP54	IP54	IP54	IP54
Batteries	Li-ion	Li-ion	Li-ion	Li-ion or 4x AA
Mains power connection	USB-C	USB-C	USB-C	DC Connector
Levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling	Pendulum levelling
Plumb bob	No	No	No	Yes
Number of laser points per line	0	0	0	1
Number of 90° angles on floor and ceiling	0	0	0	4
Laser frequency (in receiver mode)	10 KHz	10 KHz	10 KHz	10 KHz
Tilt protection	No	No	No	No
Self-levelling range	±4°	±3,5°	±3,5°	±2°
Manual slope	Yes	Yes	Yes	Yes
Electronic slope	No	No	No	No
Digital slope	No	No	No	No
Maximum electronically adjustable slope (X-axis / Y-axis)	-	-	-	-
Remote control	No	No	No	No
Built-in screw for tripod	1/4"	1/4"	1/4"	5/8"
Laser class	Class 2 - 520nm - <1mW	Class 2 - 520nm - <1mW	Class 2 - 635nm - <1mW	Class 2 - 635nm - <1mW
	009.20G	011.20R	011.20G	033.05R
	€ 89,00	€ 179,00 € 159,00	€ 199,00	€ 249,00 € 219,00
	009.20G-P	011.20R-P	011.20G-P	033.05R-P
	PROMO with tripod 160cm	PROMO with tripod 160cm	PROMO with tripod 160cm	PROMO with tripod 180cm
	€ 128,00 € 119,00	€ 218,00 € 189,00	€ 238,00 € 229,00	€ 298,00 € 259,00



MULTICROSS 5
SINGLE DOT



1,5mm / 10m

2x 50m

IP54

Li-ion or 4x AA

DC Connector

Pendulum levelling

Yes

1

4

10 KHz

No

±2°

Yes

No

No

-

No

5/8"

Class 2 - 510-530nm - <1mW

033.05G

~~€ 329,00~~

€ 279,00

033.05G-P



PROMO
with tripod 180cm

~~€ 378,00~~

€ 319,00



MULTICROSS 8
HIGH PRECISION
SINGLE DOT



1mm / 10m

2x 50m

IP54

Li-ion

DC Connector

Motorized levelling

Yes

1

4

10 KHz

No

±3,5°

Yes

Yes

No

±10%

No

5/8"

Class 3R - 660 nm - 1 mW-<5 mW

040.08

~~€ 549,00~~

€ 499,00

040.08-P



PROMO
with tripod 300cm

~~€ 688,00~~

€ 599,00



MULTICROSS 8
HIGH PRECISION
SINGLE DOT



1mm / 10m

2x 50m

IP54

Li-ion

DC Connector

Motorized levelling

Yes

1

4

10 KHz

No

±3,5°

Yes

Yes

No

±10%

No

5/8"

Class 3R - 520 nm - 1 mW-<5 mW

040.08G

~~€ 649,00~~

€ 599,00

040.08G-P



PROMO
with tripod 300cm

~~€ 788,00~~

€ 699,00



PROCROSS 8.0 DS



1mm / 10m

2x 200m

IP66

Li-ion

DC Connector

Motorized levelling

Yes

0

4

10 KHz

Yes

±3,5°

Yes

Yes

Yes

±10%

Radio frequency

5/8"

Class 2 - 520nm - <1mW

044.80G

~~€ 1099,00~~

€ 999,00

044.80G.4M-P



PROMO
with tripod 300cm
+ Quattro MM

~~€ 1537,00~~

€ 1299,00

ACCESSORIES

LI-ION BATTERY



Suitable for:
028.3FG, 033.05R,
033.05G

H60022

€ 29,00

LI-ION BATTERY



Suitable for:
011.20R, 011.20G,
027.3DG, 035.3DR,
035.3DG, 035.4DG,
034.4DE

H60028

€ 29,00

LI-ION BATTERY



Suitable for:
040.08, 040.08G

H60023

€ 69,00

LI-ION BATTERY



Suitable for:
044.80G

H60031

€ 149,00

PROCROSS 8.0 DS REMOTE CONTROL



Suitable for:
044.80G

H7006

€ 199,00

CHARGER / ADAPTER



Suitable for:
028.3FG, 033.05R,
033.05G

**H60024
H60030**

**€ 29,00
€ 3,50**

CHARGER / ADAPTER



Suitable for:
011.20R, 011.20G,
027.3DG, 035.3DR,
035.3DG, 035.4DG,
034.4DE

H60033

€ 29,00

CHARGER / ADAPTER



Suitable for:
040.08, 040.08G

H60019

€ 25,00

CHARGER / ADAPTER



Suitable for:
044.80G

H60032


€ 39,00

SPINNER

Powerhouse, mainstay, complete and reinvented.



Delivered in a convenient case, with tripod and measuring rod.

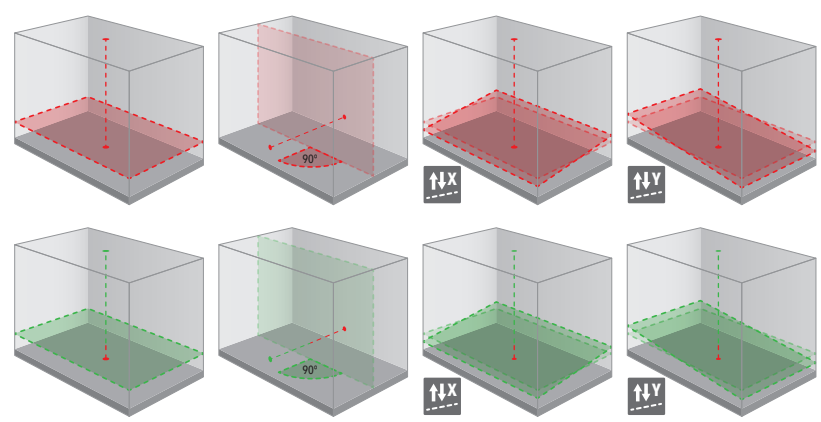


INCLUDED					
H052.CAS	• 180.30 • 180.20	• 180.10 • 180.40	H062.CHR	H7002	100.136 140.200




PARA ONE

One button on the device for simplicity.
Remote control for all advanced functions.

The Para One, now also with Z-axis.

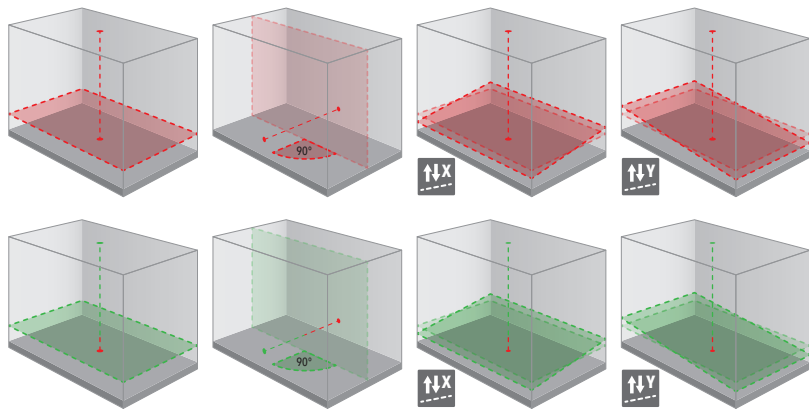

INCLUDED

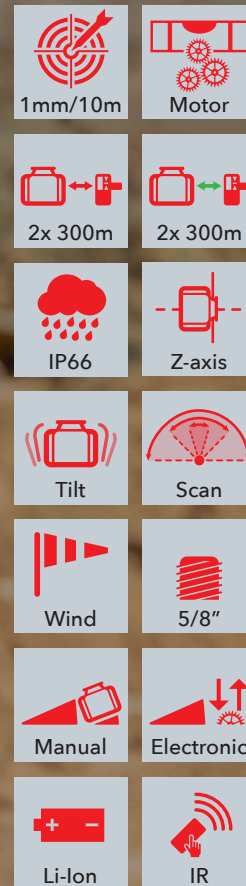


PARA

Everything you can expect from a rotary laser.

 1mm/10m	 Motor
 2x 300m	 2x 300m
 IP66	 Z-axis
 Tilt	 Scan
 Wind	 5/8"
 Manual	 Electronic
 Li-Ion	 IR



The Anti-reflection clip prevents unwanted reflections.
(included with all Para models.)

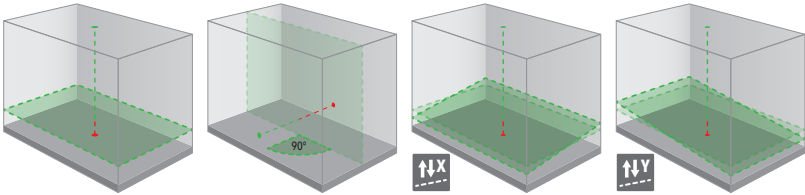

INCLUDED


H052.CAS	180.20	180.40	H052.CHR	H052.BAT	2X H052.CLI	H7008




PARA DS

Setting slopes in percentages is child's play for this comprehensive rotary laser.

Interactive display on both the remote control and the laser makes all functions easy.

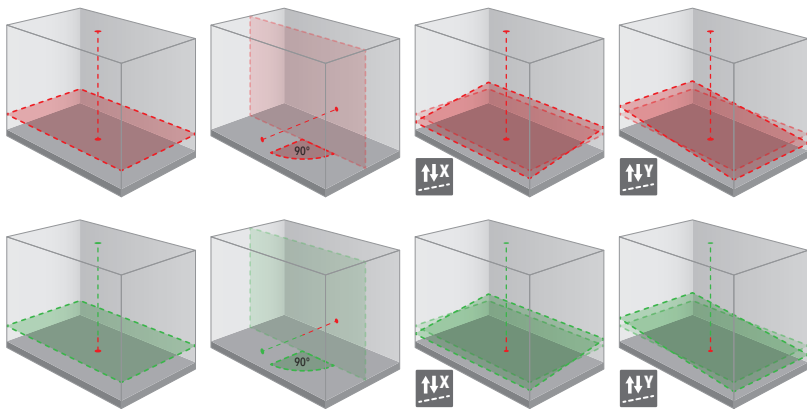

INCLUDED

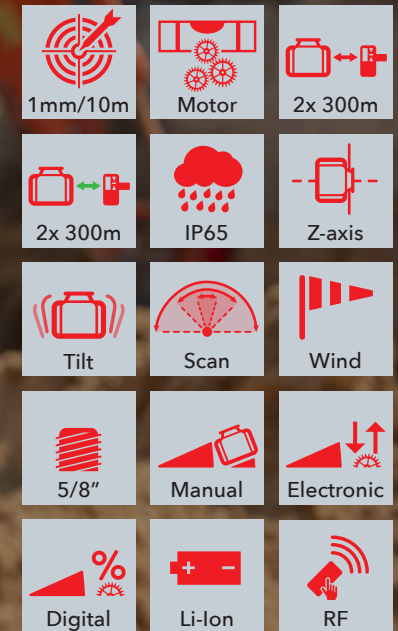

OVERVIEW ROTARY LASERS



SPINNER



SPINNER



PARA ONE



PARA ONE


Visibility				
Accuracy	1,5mm / 10m	1,5mm / 10m	1mm / 10m	1mm / 10m
Range (with receiver)	2x 250m	2x 250m	2x 300m	2x 300m
Dust and waterproofing	IP55	IP55	IP66	IP66
Batteries	Li-ion	Li-ion	Li-ion	Li-ion
AC power connection	DC Connector	DC Connector	USB-C	USB-C
Levelling	Motorized levelling	Motorized levelling	Motorized levelling	Motorized levelling
Plumb bob (Z-axis)	Yes	Yes	Yes	Yes
Rotations per minute	0, 120, 300, 600 RPM	0, 120, 300, 600 RPM	0, 120, 300, 600, 800 RPM	0, 120, 300, 600, 800 RPM
Scanning function	0°, 10°, 45°, 90°, 180°	0°, 10°, 45°, 90°, 180°	0°, 10°, 45°, 90°, 180°	0°, 10°, 45°, 90°, 180°
Wind function	No	No	Yes	Yes
Tilt protection	Yes	Yes	Yes	Yes
Self-levelling range	±5°	±5°	±5°	±5°
Manual slope	Yes	Yes	Yes	Yes
Electronic slope	Yes	Yes	Yes	Yes
Digital slope	No	No	No	No
Maximum electronically adjustable slope (X-axis / Y-axis)	±10%	±10%	±10%	±10%
Remote control	Infrared	Infrared	Infrared	Infrared
Built-in screw for tripod	5/8"	5/8"	5/8"	5/8"
Laser class	Class 2 - 635nm - <1mW	Class 2 - 515nm - <1mW	Class 2 - 635nm - <1mW	Class 2 - 515nm - <1mW
062.03R.1E.CS				
CASE-SET with Gyro Receiver				
 € 699,00 € 599,00				
062.03R.4M.CS				
CASE-SET with Quattro MM				
 € 879,00 € 779,00				
062.03G.1E.CS				
CASE-SET with Gyro Receiver				
 € 799,00 € 699,00				
062.03G.4M.CS				
CASE-SET with Quattro MM				
 € 979,00 € 879,00				
052.01R.50				
with Para Receiver MM				
 € 769,00 € 699,00				
052.01R.4M				
with Quattro MM				
 € 879,00 € 799,00				
052.01G.50				
with Para Receiver MM				
 € 869,00 € 799,00				
052.01G.4M				
with Quattro MM				
 € 979,00 € 899,00				



PARA


1mm / 10m
2x 300m
IP66
Li-ion
USB-C
Motorized levelling
Yes
0, 120, 300, 600, 800 RPM
0°, 10°, 45°, 90°, 180°
Yes
Yes
±5°
Yes
Yes
No
±10%
Infrared
5/8"
Class 2 - 515nm - <1mW

052.02G.50



with Para Receiver MM
~~€ 988,00~~
€ 799,00

052.02G.4M




with Quattro MM
~~€ 1098,00~~
€ 899,00



PARA DS


1mm / 10m
2x 300m
IP65
Li-ion
USB-C
Motorized levelling
Yes
0, 120, 300, 600, 800 RPM
0°, 10°, 45°, 90°, 180°
Yes
Yes
±5°
Yes
Yes
Yes
±10%
Radio frequency
5/8"
Class 2 - 635nm - <1mW

052.05R.50



with Para Receiver MM
~~€ 1319,00~~
€ 1199,00

052.05R.4M




with Quattro MM
~~€ 1429,00~~
€ 1299,00



PARA DS


1mm / 10m
2x 300m
IP65
Li-ion
USB-C
Motorized levelling
Yes
0, 120, 300, 600, 800 RPM
0°, 10°, 45°, 90°, 180°
Yes
Yes
±5°
Yes
Yes
Yes
±10%
Radio frequency
5/8"
Class 2 - 515nm - <1mW

052.05G.50



with Para Receiver MM
~~€ 1419,00~~
€ 1299,00

052.05G.4M



with Quattro MM
~~€ 1529,00~~
€ 1399,00

ACCESSORIES

ANTI REFLECTION CLIP



Suitable for:
052.01R, 052.01G,
052.02R, 052.02G,
052.05R, 052.05G

H052.CLI

€ 9,00

CHARGER / ADAPTER



Suitable for:
062.03R, 062.03G

H062.CHR

€ 59,00

PARA ONE / PARA REMOTE CONTROL



Suitable for:
052.01R, 052.01G,
052.02R, 052.02G

H7008

€ 35,00

LI-ION BATTERY



Suitable for:
052.01R, 052.01G,
052.02R, 052.02G,
052.05R, 052.05G

H052.BAT

€ 49,00

CHARGER / ADAPTER



Suitable for:
052.01R, 052.01G,
052.02R, 052.02G,
052.05R, 052.05G

H052.CHR

€ 59,00

PARA DS RF REMOTE CONTROL



Suitable for:
052.05R, 052.05G

H7009

€ 99,00

BUNDLE OFFER

COMPLETE YOUR ROTARY LASER WITH A TRIPOD + MEASURING ROD

TRIPOD 165 CM
+ ROD 200 CM



100.165-B

~~€ 129,00~~
€ 109,00

TRIPOD 330 CM
+ ROD 240 CM



110.330-B

~~€ 258,00~~
€ 219,00

RECEIVERS



LINE TRACER R/G



GYRO RECEIVER



GYRO RECEIVER



PARA RECEIVER MM



PARA RECEIVER MM

Suitable for					
Accuracy	2 mm	1 / 2 / 3 mm	1 / 2 / 3 mm	1 / 5 / 10 mm	1 / 5 / 10 mm
Front display	LED	LCD screen	LCD screen	LCD screen + LED	LCD screen + LED
Back display	LED	LCD screen	LCD screen	LCD screen	LCD screen
Distance to laser line (mm)	No	No	No	Yes	Yes
Dust and waterproofing	IP54	IP56	IP56	IP65	IP65
Suitable laser frequency	10 KHz	-	-	-	-
Height of reception field	22 mm	45 mm	45 mm	125 mm	125 mm
Included clamp	H60029	H60009	H60009	H60016	H60016
	150.12.LT	150.10.GS	150.20.GS	152.50R	152.50G
	€ 99,00	€ 119,00	€ 119,00	€ 189,00	€ 189,00

TRIPODS



LIGHT DUTY 160CM



LIGHT DUTY 180CM



LIGHT DUTY 240CM



MEDIUM DUTY 300CM



ALUMINIUM 165CM

Range (min. and max. height)	60 - 160 cm	60 - 180 cm	74 - 240 cm	75 - 300 cm	100 - 165 cm
Thread	1/4"	5/8"	5/8"	5/8"	5/8"
Head	Tilting head	Fixed	Tilting head	Fixed	Fixed
Feet	Rubber	Rubber	Rubber	Rubber, Metal pin	Metal pin
Height adjustment	Fold-out legs + Spindle	Fold-out legs + Spindle	Fold-out legs + Spindle	Fold-out legs + Spindle	Fold-out legs
	092.160	092.180	092.240	090.300	100.165
	€ 39,00	€ 49,00	€ 99,00	€ 139,00	€ 85,00



QUATTRO



1 / 2 / 3 mm

LCD screen + LED

LCD screen

No

IP67

7 - 12 KHz

60 mm

H60013

150.40.A
€ 199,00


QUATTRO MM



0,5 / 1 / 2 / 5 / 10 mm

LCD screen + LED

LCD screen

Yes

IP67

7 - 12 KHz

60 mm

H60013

150.40.M
€ 299,00


MAESTRO



0,5 / 1 / 2 / 5 / 10 mm

LCD screen + LED

LCD screen

Yes

IP67

7 - 12 KHz

90 mm

H60013

150.60.R
€ 349,00

MEASURING RODS


TELESCOPIC
ROD
400 CM

120 - 400 cm

No

Yes

140.400
€ 45,00

TELESCOPIC
ROD
500 CM

120 - 500 cm

No

Yes

140.500
€ 55,00

AUTOLOCK
ROD
240 CM

87 - 240 cm

Yes

Yes

140.240.SK
~~€ 69,00~~
€ 59,00

AUTOLOCK
ROD
350 CM

191 - 350 cm

Yes

Yes

140.350.SK
~~€ 89,00~~
€ 79,00


ALUMINIUM 3D 165CM

100 - 165 cm

5/8"

Ball head

Metal pin

Fold-out legs

100.165.D
€ 89,00


HEAVY DUTY 330CM

128 - 330 cm

5/8"

Fixed

Rubber, Metal pin

Fold-out legs + Spindle

110.330
~~€ 209,00~~
€ 199,00


HEAVY DUTY 400CM

170 - 400 cm

5/8"

Fixed

Metal pin

Fold-out legs + Spindle

110.400
€ 279,00


SUPPORT POLE 330CM

170 - 400 cm

1/4" & 5/8"

Fixed

Plastic feet

Infinite height adjust. with clamp

120.330
€ 79,00

ACCESSORIES

WALL MOUNT WITH CLAMP AND MAGNET 1/4"



130.08 € 45,00

WALLCLAMP WITH 3D HEAD 1/4"



130.09 € 19,00

WALL BRACKET WITH HEIGHT ADJUSTMENT AND UNFOLDING SUPPORT 1/4"



130.16 € 45,00

TRIPOD ADAPTER 1/4"M - 5/8"F



130.01 € 20,00

WALL MOUNT WITH MICRO ADJUSTMENT, CLAMP AND MAGNET 1/4"



130.17 € 59,00

TRIPOD ADAPTER 5/8"M - 1/4"F



130.06 € 9,00

WALL BRACKET WITH HEIGHT ADJUSTMENT AND H/V CLAMP 1/4"



130.19 € 49,00

TRIPOD ADAPTER 5/8"M - 5/8"F



130.07 € 15,00

SLOPE ADAPTER 5/8"



Suitable for:
EVERY LASER WITH
MANUAL SLOPE

115.11 € 129,00
**PROMOTION:
WITH PURCHASE OF
A NEW LASER**
115.11-P ~~€ 129,00~~
€ 95,00

MINI TRIPOD ADAPTER 5/8" M - 1/4" F



130.18 € 5,00

MAGNETIC TARGET PLATE



• 180.30 € 9,00
• 180.20 € 9,00

TRIPOD ADAPTER 1/4" M - 5/8" F




130.20 € 9,00

LASER GLASSES



• 180.10 € 9,00
• 180.40 € 9,00

TARGET STICKER YELLOW



180.50 € 6,00



WETPRICKER & HYDRO



WETPRICKER



HYDRO

Measuring depth wood	± 2 mm	20 mm
Measuring depth building materials	± 1 mm	10 mm
Number of wood types	1	8
Number of building material types	1	6
Calibration function	Yes	Yes
Measurement accuracy wood	±2%	±1,5%
Measurement accuracy building materials	±0,1%	0,9 - 1,5%
Maximum moisture	0 - 85% RH	-
Sensor	No	Ultrasonic
Measuring pin	Yes, integrated, replaceable	No
Length of measuring pin	8 mm	-
Measurement range wood	6 - 44%	2 - 65%
Resolution wood	±1%	±0,1%
Measurement range building materials	0,2 - 2,1%	0,1 - 35%
Resolution building materials	±0,05%	±0,1%
	700.08	195.10
	€ 79,00 € 69,00	€ 199,00 € 169,00



DISTY

Distances, surfaces, angles,...
all no problem for these
laser distance meters



DISTY 40R



DISTY 60G



DISTY 80R



DISTY 120RC

Range	40 m	60 m	80 m	120 m
Number of memory slots	99	99	99	100
Slope indication	Yes	Yes	Yes	Yes
Surface area	Yes	Yes	Yes	Yes
Volume	Yes	Yes	Yes	Yes
Accuracy	2 mm	2 mm	2 mm	2 mm
Measurements add / subtract	Yes	Yes	Yes	Yes
Continuous measurement (minimum and maximum size)	Yes	Yes	Yes	Yes
Number of Pythagoras functions	4	4	4	5
Simple surface calculation	Yes	Yes	Yes	Yes
Multiple surface calculation	Yes	Yes	Yes	Yes
Painter's function	Yes	Yes	Yes	Yes
Available units	m - inch - ft	m - inch - ft	m - inch - ft	m - inch - ft
Camera	No	No	No	Yes
Zoom	-	-	-	4x
Battery	3x AAA or Li-ion (option)	Li-ion or 3x AAA	Li-ion or 3x AAA	3x AAA or ni-mh (chargeable)
Dust and waterproofing	IP54	IP54	IP54	IP54
	202.40R	202.60G	202.80R	250.120RC
	€ 69,00 € 59,00	€ 119,00 € 99,00	€ 89,00 € 79,00	€ 299,00 € 259,00



ROLLER 2



Range	2 m
Width of measuring blade	12 mm
Extra thick measuring blade	No
Nylon coated	No
Locking brake	Yes
Pressure brake	No
501.02	
€ 2,99	



MEASURING WHEEL 2.0

No distance is too far.

Range	9999,9 m
Accuracy	100 mm
Available units	m
Brake	Yes
270.318A	
€ 119,00 € 99,00	



MULTIPOWER



MULTIPOWER 3.6
COMPACT



MULTIPOWER 4.6

Category	Cat. III - 600V
True RMS	Yes
Voltage DC/AC	max. 600V
Current DC/AC	max. 10A
Range setting	Automatic
Display	Digital, 4000 counts
Flashlight	LED
Resistance	max. 40 MΩ
Capacity	max. 4000µF
Temperature	-
400.36C	
€ 89,00 € 79,00	

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	Yes
Voltage DC/AC	max. 1000V
Current DC/AC	max. 10A
Range setting	Automatic
Display	Digital, 6000 counts
Flashlight	LED
Resistance	max. 60 MΩ
Capacity	max. 6000µF
Temperature	-20°C ~ +760°C
400.46	
€ 189,00 € 159,00	



VOLTTESTER



VOLTTESTER 4.6A

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	No
Voltage DC/AC	max. 1000V
Current DC/AC	-
Range setting	Automatic
Display	LED
Resolution	12, 24, 50, 120, 400, 690, 1000V
Flashlight	LED
Frequency	40Hz up to 400Hz
420.46A	
€ 99,00 € 79,00	



VOLTTESTER 4.6D

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	Yes
Voltage DC/AC	max. 1000V
Current DC/AC	-
Range setting	Automatic
Display	LCD (3 1/2 digit)
Resolution	1V
Flashlight	LED
Frequency	40Hz up to 400Hz
421.46D	
€ 119,00 € 99,00	



AMPCLAMP



AMPCLAMP 200



AMPCLAMP 1000

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	Yes
Voltage	max. 1000V (AC/DC)
Current	200A (AC)
Range setting	Automatic
Display	LCD, 6000 counts
Flashlight	LED
Resistance	max. 60 MΩ
Capacity	max. 4000μF
Diode test	0.35mA typical, Open circuit <3V DC
Continuity check	≤ 50Ω
Input impedance	10MΩ (VDC & VAC)
Temperature	No
Clamp jaw opening	16 mm
430.200 € 119,00 € 99,00	

Category	Cat. IV - 600V / Cat. III - 1000V
True RMS	Yes
Voltage	max. 1000V (AC/DC)
Current	600A (AC/DC)
Range setting	Automatic
Display	LCD, 6000 counts
Flashlight	LED
Resistance	max. 60 MΩ
Capacity	max. 100mF
Diode test	0.3mA typical, Open circuit 3.2V DC
Continuity check	≤ 50Ω
Input impedance	10MΩ (VDC & VAC)
Temperature	-20°C ~ 100°C
Clamp jaw opening	35 mm
431.000 € 129,00	

VOLTPEN 200-12



Category	Cat. IV - 1000V
True RMS	No
Voltage DC/AC	12V-1000V (AC) 200V-1000V (AC)
Current DC/AC	No
Range setting	Manually
Display	No
Flashlight	LED
410.212	
€ 19,50	

SIGNALTESTER RJ-F

Multifunctional cable tester with tone generator and cycle test for network cables and video cables.

Cable types	Coax, Cat 7, 7a, 6, 6a, 5, 5a, 4, 3
Shielded / Unshielded	Yes / Yes
Voice	RJ11 / RJ12 (4/6 wires)
Data	RJ45 (8 wires)
Video	Type-F (COAX)
Test	Pass / Fail / Reversed / Shorted / Cross Over / Open / Shield / Split
Wiring tester	Included
Distance ID	5 Video / 5 Data
Signal probe	Included
Tone generator	Yes
Maximum length	300m
Maximum resistance	100Ω (DC)
Minimum length for split pair	0,5m
Voltage warning	Yes
450.68C € 109,00 € 99,00	



TUBECORDER



TUBECORDER 5.5 HD
DUAL



TUBECORDER 5.8 HD
FLEX

Screen	5"	5"
Screen resolution	1280 x 720	1280 x 720
Camera diameter	5 mm	8 mm
Camera resolution	2MP	2MP
Front camera	Yes	Yes
Front camera focus range	2 cm - 10 cm	2 cm - 10 cm
Viewing angle	78°	78°
Front object illumination	LED	LED
Side camera	Yes	Yes
Side camera focus range	2 cm - 5 cm	2 cm - 5 cm
Side object illumination	LED	LED
Rotatable camera head	No	350°
Length of flexible tube	5 m	5 m
Photo resolution	1920 x 1080	1920 x 1080
Photo format	.jpg	.jpg
Video resolution	1280 x 720	1280 x 720
Video format	.mp4	.mp4
TV-out	No	No
Data output	Micro SD-card	Micro SD-card
SD card included	Yes	Yes
	650.552	651.58F
	€ 299,00	€ 399,00





ACCESSORIES

GOOSENECK 5M X 5.5MM
DUAL



Suitable for:
650.552

690.552

€ 129,00

GOOSENECK 10M X 8MM
TRIPLE



Suitable for:
650.552

690.1083

€ 149,00

GOOSENECK 5M X 5.5MM
SINGLE **NEW**



Suitable for:
651.58F

691.551

€ 119,00

GOOSENECK 5M X 8MM
FLEX



Suitable for:
651.58F

691.582F

€ 169,00

GOOSENECK 10M X 8MM
FLEX



Suitable for:
651.58F

691.1082F

€ 199,00

TEMPPOINTER



NIEUW



TEMPPOINTER 9



TEMPPOINTER 9 DEW

Infrared temperature
Dew point temperature
Emissivity
D:S (distance to spot ratio)
Accuracy of infrared
Thermocouple temperature
Accuracy of thermocouple
Spectral response
Display
Display resolution
Response time
Operating temperature
Relative humidity
Laser
Battery

-50°C - 800°C
No
0,10 - 1,00
16:1
-50°C - 20°C: ± 3,5°C 20 - 300°C: ± 1% 300 - 800°C: ± 1,5%
-50°C - 1370°C
"-50°C - 0°C: ± 2°C 0 - 1370°C: ± 1,5°C"
8 ~ 14 µm
LCD
0,1°C < 1000; 1°C > 1000
150 ms
0 ~ 50°C
10% ~ 90%
Class 2, <1mW, 630-670nm
2x 1,5V AAA
300.09
€ 79,00


-50°C - 800°C
Yes
0,10 - 1,00
20:1
-50°C - 20°C: ± 3°C 20 - 300°C: ± 1°C 300 - 800°C: ± 2%
-
-
8 ~ 14 µm
LCD
0,1°C < 1000; 1°C > 1000
< 100 ms
-30°C - 100°C
0% ~ 100%
Class 2, <1mW, 630-670nm
9wwV
310.09D
€ 109,00 € 99,00

TEMPVIEWER 10800D



Blend thermal and
visual images

Average visual
image temperature

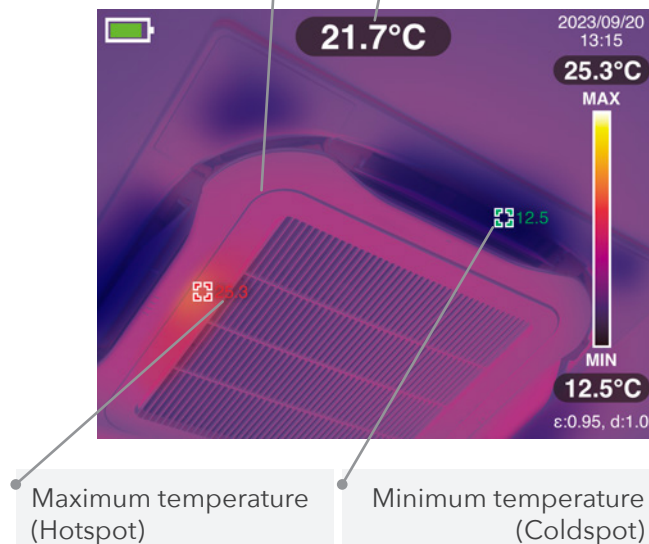

Maximum temperature
(Hotspot)

Minimum temperature
(Coldspot)

Flashlight



TEMPVIEWER 10800D

Infrared temperature	-20°C - 400°C
Accuracy of infrared	"-20°C - 0°C: ± 5°C 0°C - 100°C: ± 3°C 100°C - 400°C"
Ambient temperature	0°C ~ 35°C
Emissivity	0,01 - 0,99
Spectral response	8 ~ 14 μm
Display	3,5" Color
Display resolution	320 x 240
Visible light resolution	640 x 480
Response time	-
Operating temperature	-10°C ~ 50°C
Relative humidity	-
Laser	-
Battery	Li-ion
Thermal image pixels	10800 (120x90)
Field of view	50° x 63,4°
Pixel size	17 μm
Output frame rate	≤ 20 Hz
Thermal sensitivity	< 60 mK
Measurable distance range	0,5 m ~ 1.2 m
Color palettes	6
High/low temperature indication	Yes
Sensor non-uniformity	< 5%
Storage	Micro SD card (included)
Flashlight	Yes
322.315	
€ 799,00 € 699,00	


MULTISCAN



MULTISCAN	
Detection depth for ferrous materials	80 mm
Detection depth for non-ferrous materials	60 mm
Detection depth for live wires	50 mm
Detection depth for wood	20 mm
Graphical indication of detection depth	Yes
196.20	
€ 79,00	

DRILL POINTER

NEW

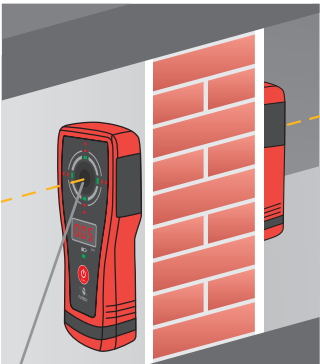

Know where your drill will end, even before you start drilling.



DRILL POINTER	
LED indicators (receiver)	13
LED display (receiver)	Ja
Audible signal (receiver)	Ja
Maximum wall thickness	2-150 cm
Wall thickness measurements	2-200 cm
Depth accuracy	± 5%
Wall thickness accuracy	± 3 mm (no reinforcement) ± 10 mm (with reinforcement)
LED indicators (transmitter)	1
LED display (transmitter)	No
Audible signal (transmitter)	No
571.150	
€ 349,00 € 299,00	
571.150-P	
 PROMO with Multiscan	
€ 428,00 € 349,00	

EAGLE 32



EAGLE 32

Accuracy	1,0 mm / 1000m
Lens aperture	36mm
Magnification	32x
Self-levelling range	±15'
Horizontal circle	360°
Dust and waterproofing	IP54
072.32 € 179,00 € 159,00	
072.32-P  PROMO with tripod 165cm and rod 400cm € 313,00 € 269,00	

DIGITAL LEVEL 20

Digital level



DIGITAL LEVEL 20

Accuracy	0°: 0,5° / rest: 0,1°
Length	20 cm
Dust and waterproofing	IP67
Magnetic	Yes
Resolution	1mm/m
Available units	° (degrees), mm/m, %
Measurement range	4 x 90°
Shock-absorbing end caps	Yes
Rotating display (upside down)	Yes
906D-20	
€109,00	

DIGICORNER

Digital angle meter



DIGICORNER

Accuracy	0,1°
Length	26 cm
Magnetic	No
Available units	° (degrees)
Angle indication	digital
Number of memory slots	1
Bubble level	Yes
Bubble level color	yellow/green
992D T-Bevel-30	
€ 69,00	

*VISIT US
ONLINE FOR*
more product information
product comparisons
product videos
user manuals



www.futech-tools.com



*FIND
THE BEST LASER
FOR YOU!*

www.selectlaser.com

Prices are mentioned **WITHOUT TAXES (VAT, ...)** and valid until 30.06.2025.
Changes in price, shape, execution and potential misprints are reserved. Images used are not strict.
New and/or improved product versions can be launched during the year.

Warranty clauses

FUTECH measuring instruments are made with carefully selected components and manufactured with the utmost care, so that we can offer you products of superior quality. In the unlikely event of your product becoming defective as a result of material or manufacturing faults, you can benefit from a 2 YEAR manufacturer's warranty. During this period, your device will be repaired or replaced free of charge if all of the following conditions are met:

1. Your device was purchased less than 2 years beforehand from an authorised FUTECH distributor. As proof, you attach a copy of the purchase invoice stating the type and serial number of the device to the defective product.
2. You send the defective product to an authorised FUTECH distributor in its original protective packaging (fabric bag, plastic case, etc.).
3. The product does not display damage caused by inappropriate use (e.g. crack(s) due to a fall, internal sand/dirt/water damage, blown or replaced fuses, damage due to use of incorrect charger/adaptor, leaky batteries, attempt to remove or alter the serial number, damage after opening the product, etc.)
4. The product does not show signs of handling or (partial) repair by an unauthorised service centre (e.g. opening of the product, use of non-original parts, etc.).
5. The damage has not been caused by the use of non-original FUTECH accessories.

The manufacturer's warranty does NOT cover periodic maintenance work (e.g. annual fine tuning) or any batteries provided with the unit. The manufacturer's warranty is granted to the first owner of the device as stated on the invoice of the authorised FUTECH distributor. The warranty cannot be transferred to any other party. All repair costs (e.g. transport, parts, labour, etc.) for repairs not covered by the manufacturer's warranty shall be borne in full by the user.

your FUTECH dealer

